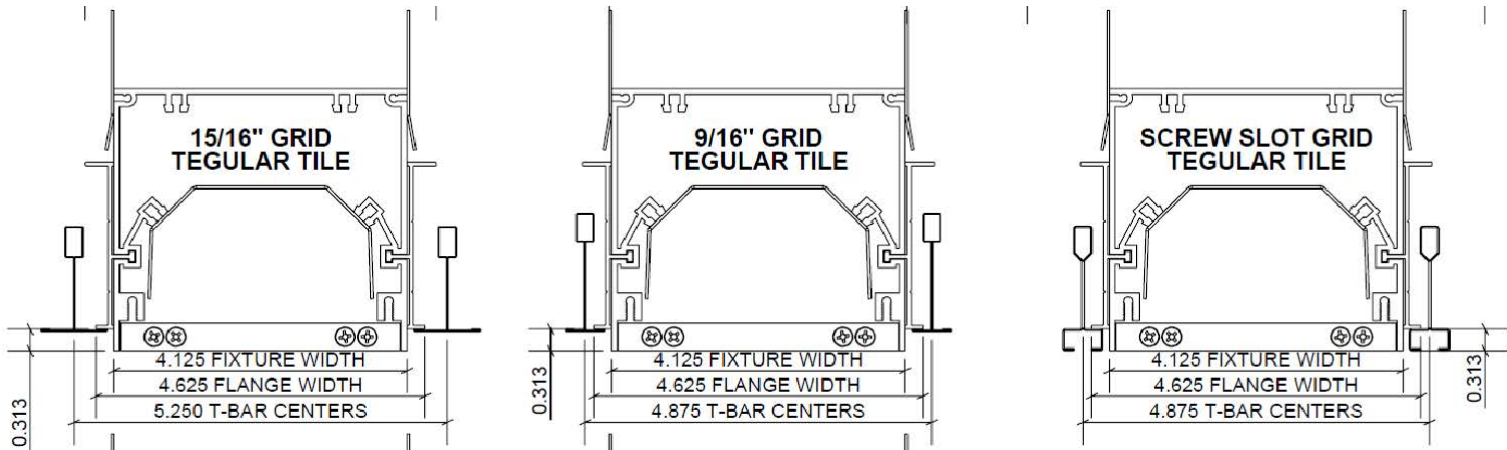
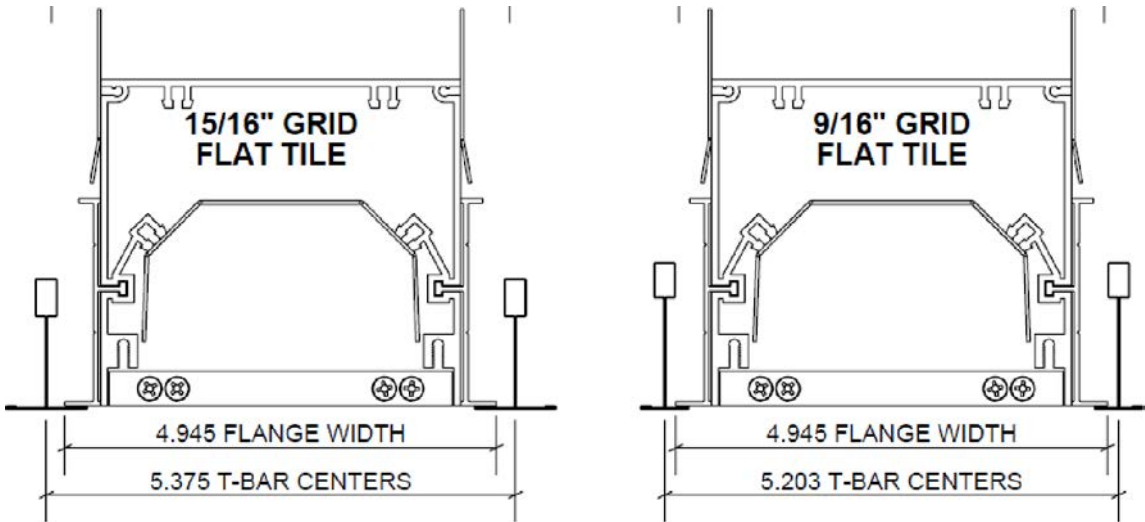


Fixture Family: HIGH ABUSE LINEAR SERIES

Description: HAL - RECESSED T-BAR MOUNT INSTALLATION INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

- This product must be installed in accordance with all applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.
  - Disconnect power before beginning installation.
  - Fixture must be installed in compliance with the National Electric Code and any local codes.
  - To be installed only by a qualified electrician.
- Proper grounding is required to ensure personal safety.
  - Read all fixture markings and labels to ensure correct installation of fixture.
  - Risk of fire, use minimum of 90C supply connectors.
  - These instructions may not cover all details or variations. If additional information is needed, please contact New Star Lighting.



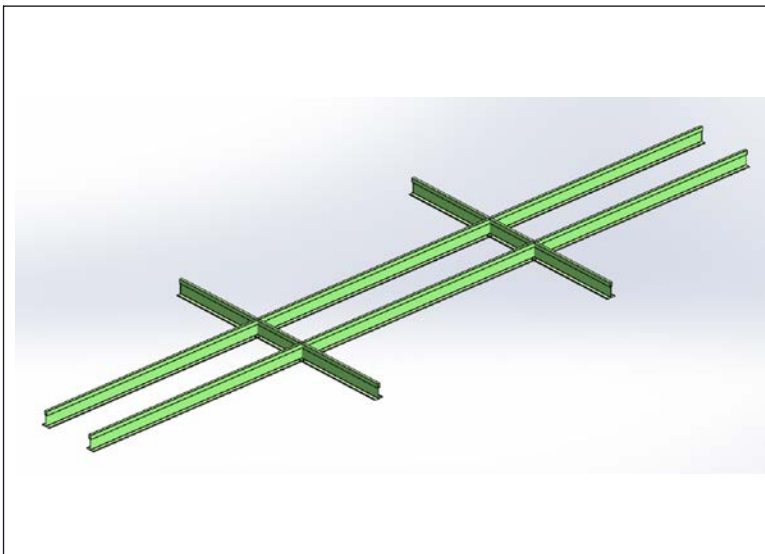


Figure 1

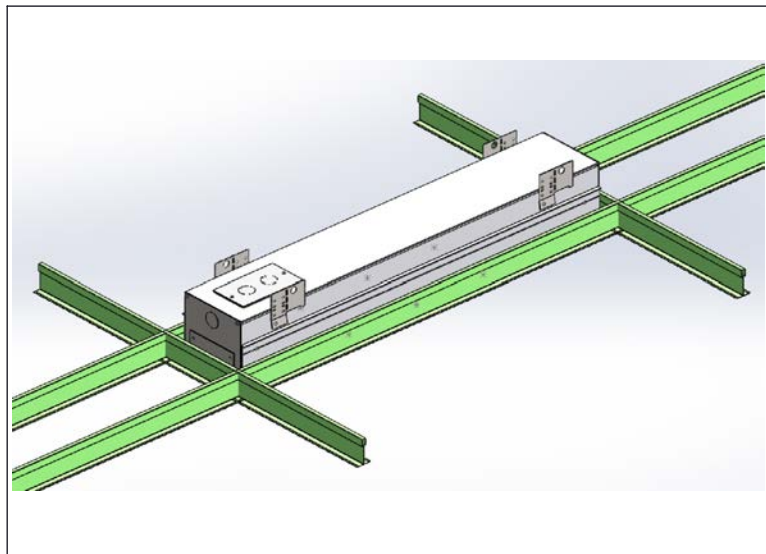


Figure 2

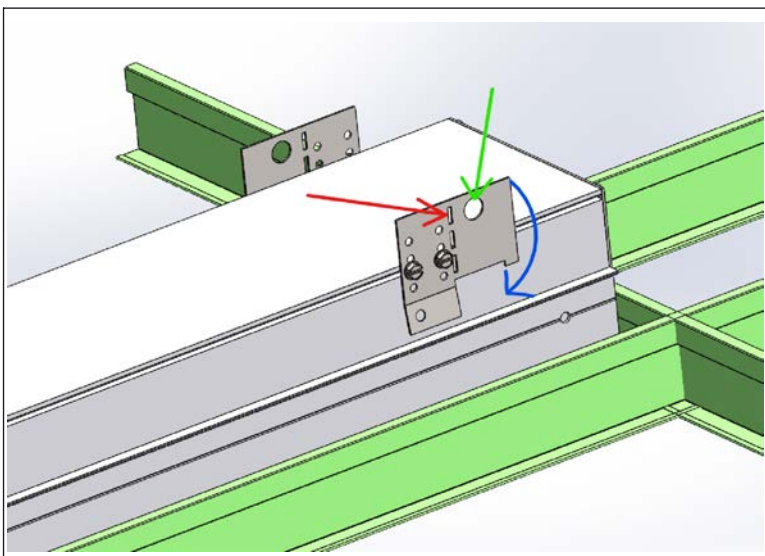


Figure 3

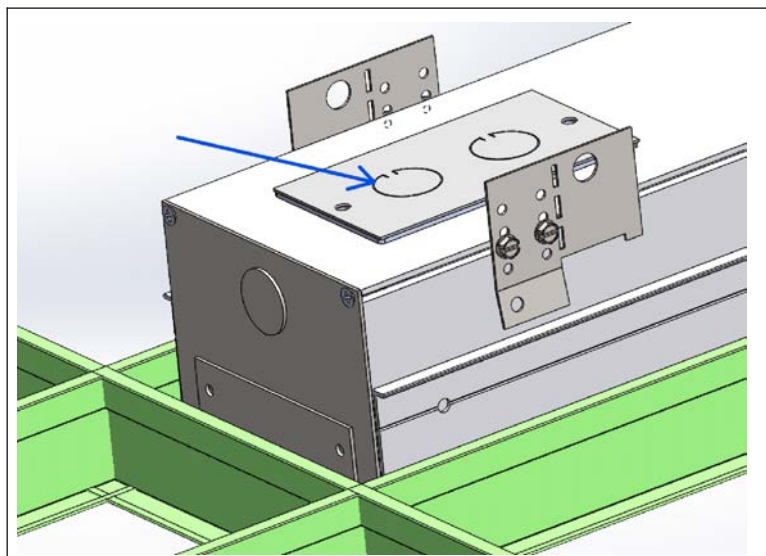


Figure 4

## INSTALLATION STEPS

1. Set the t-bar width spacing for your specific t-bar, as shown on Page 1.
2. Lay the fixture in the grid opening.
3. Bend safety bracket at the notches (red arrow) and swing out (blue arrow). Support fixture to structure as per local code via hole provided (green arrow).
4. Remove knockout from access plate and make electrical connections to the fixture.

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure, or process. Specifications and dimensions are subject to change.

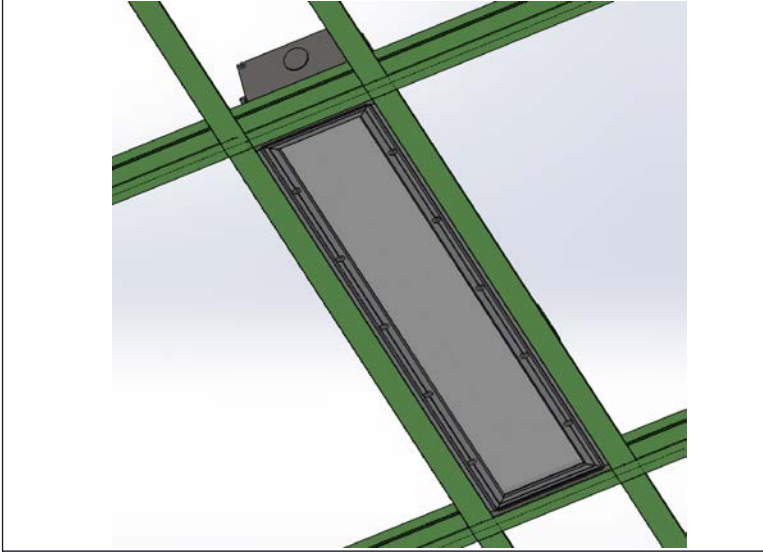


Figure 5

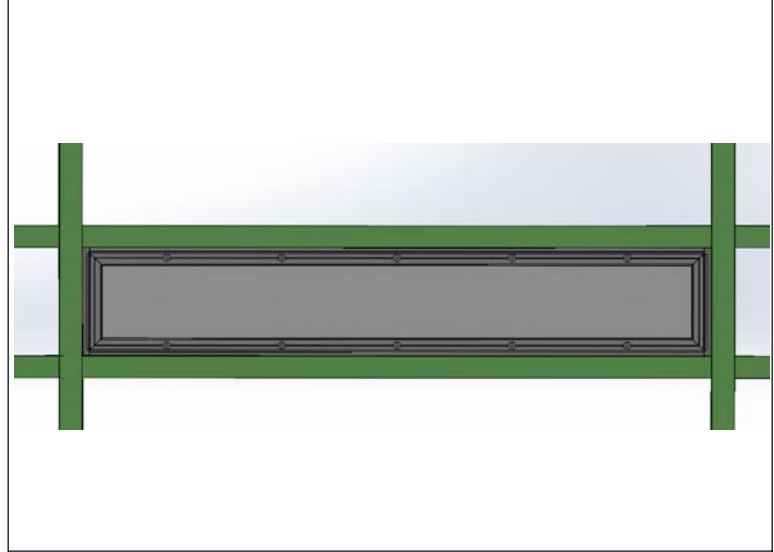


Figure 6

## INSTALLATION STEPS

5. Fixture installed, isometric view from below.
6. Fixture installed, view from below.