

INSTALLATION INSTRUCTIONS


Fixture Family: DCDL

Description: DCDL SERIES - RECESSED INSTALLATION INSTRUCTIONS


IMPORTANT SAFETY INSTRUCTIONS

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Proper grounding is required to insure personal safety.
- Disconnect power before beginning installation.
- Read all fixture markings and labels to ensure correct installation of fixture.
- Fixture must be installed in compliance with the National Electric Code and any local codes.
- Risk of fire, use minimum of 90C supply connectors.
- To be installed only by a qualified electrician.
- These instructions may not cover all details or the variations. If additional information is needed, please contact New Star Lighting.


CEILING CUT OUT DIMENSIONS




DCDL-4-R



DCDL-6-R




DCDL-4-S




DCDL-6-S


EXPLODED VIEW

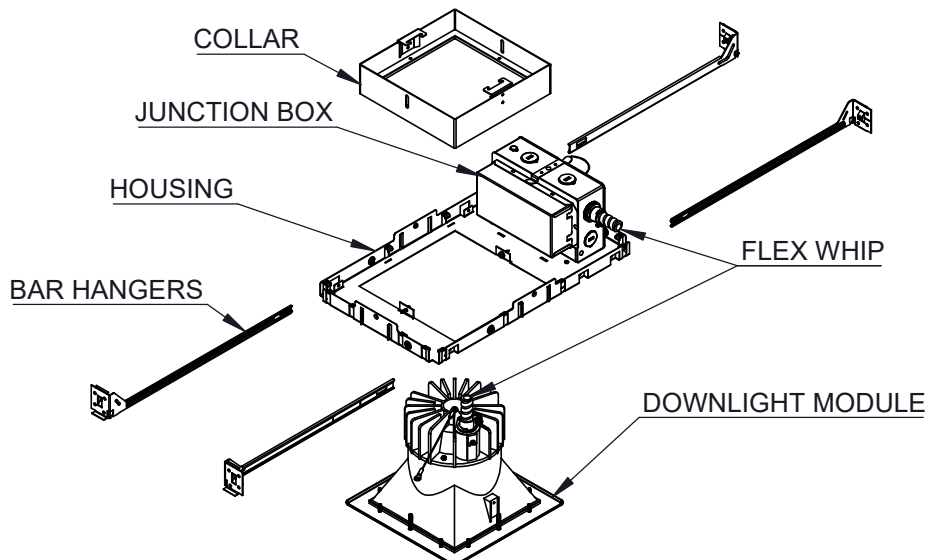

DIMENSION DATA

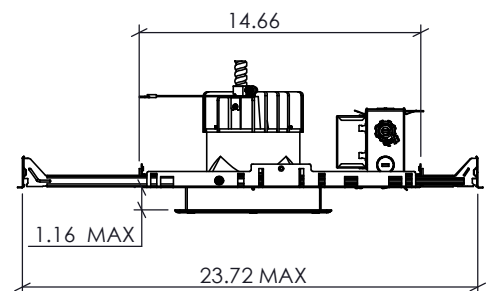

SIDE VIEW



Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure or process. Specifications and dimensions are subject to change.

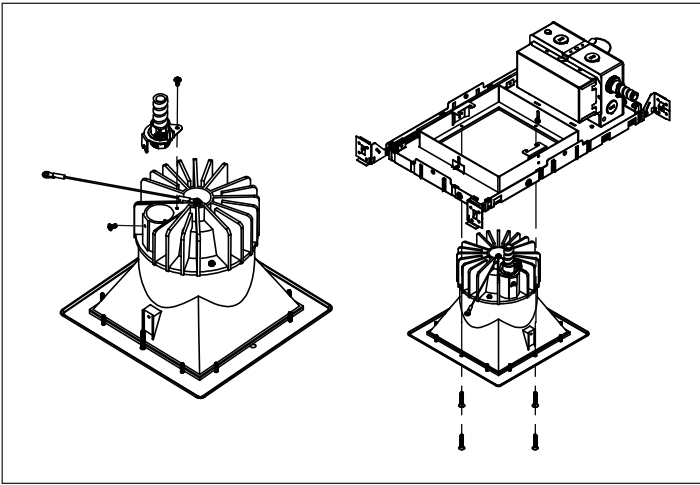


Figure 1

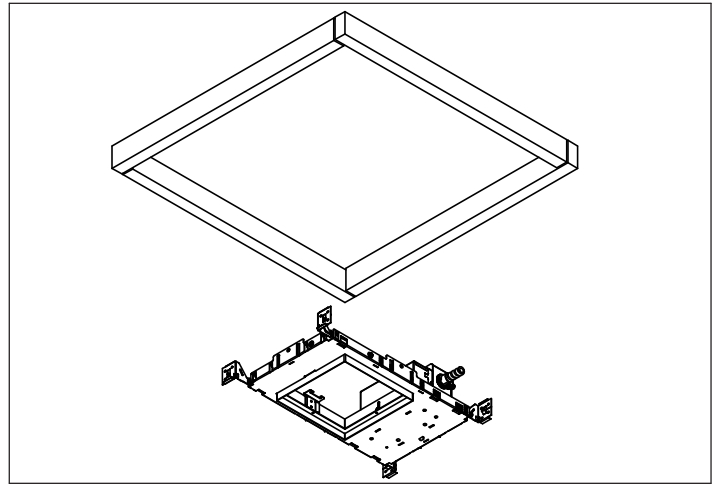


Figure 2

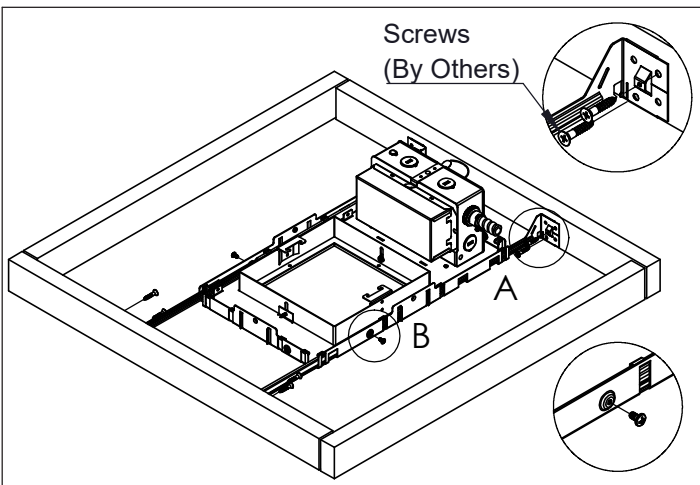


Figure 3

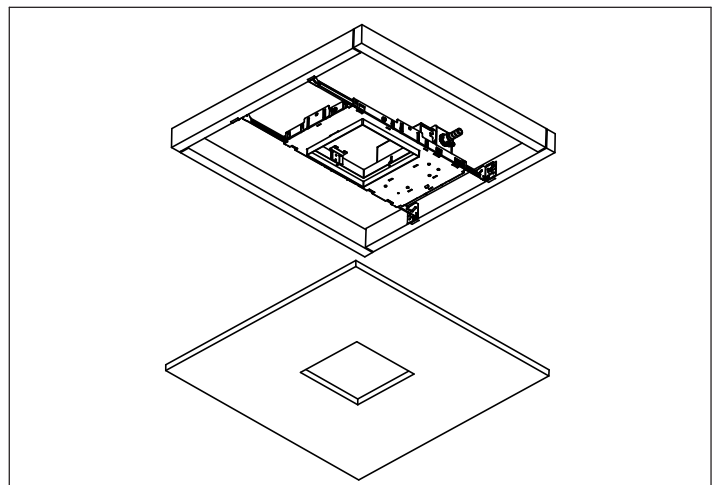


Figure 4

CEILING MOUNT

1. Remove screws, lanyard and disconnect electrical connection in Flex Whip to release it from Downlight Module. Remove screws to release Downlight Module from Housing(Fig. 1)
2. Raise Housing Assembly into ceiling. (Fig. 2)
3. Extend Bar Hangers and secure them to wood blocking with screws provided by others. Then secure Bar Hangers to Housing by tightening screws. (Fig. 3)
4. Make all necessary electrical connections in Junction Box and install Drywall with pre-cut dimensions. (Fig. 4)

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure or process. Specifications and dimensions are subject to change.

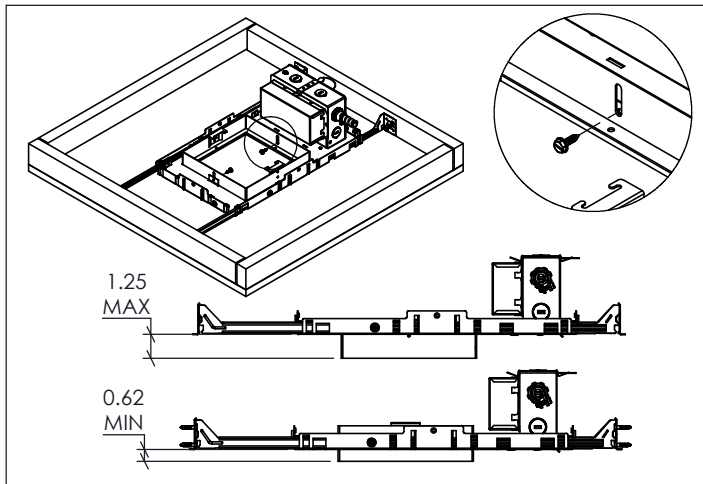


Figure 5

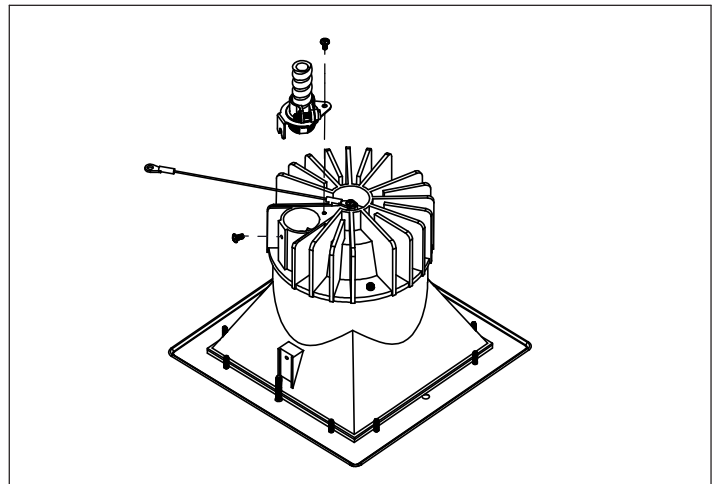


Figure 6

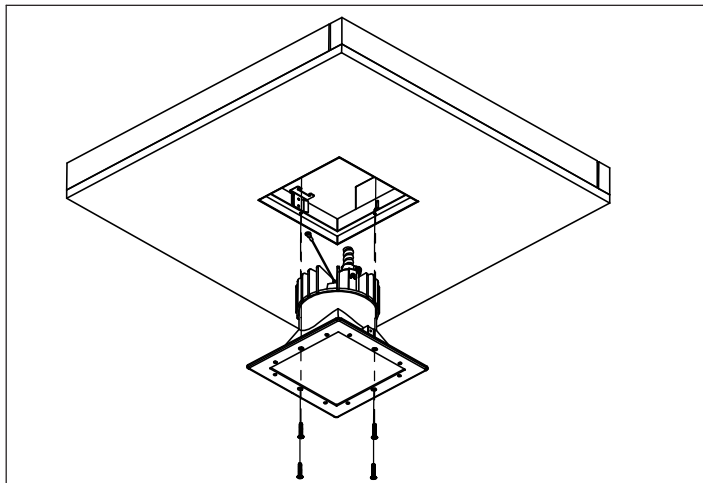


Figure 7

CEILING MOUNT

5. Adjust height of Collar, by loosening screws, to match ceiling thickness. (Fig. 5)
6. Make all necessary electrical connections in Flex Whip and then fasten it and lanyard to Downlight Module. (Fig. 6)
7. Raise Downlight Module Assembly and fasten into Housing Assembly. (Fig. 7)

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure or process. Specifications and dimensions are subject to change.