

STARCLEAN™ TOP ACCESS LED SERIES

PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Intended for Cleanrooms, Hospitals, Hi-Tech Manufacturing, Laboratories, Food Processing Facilities, Commercial Kitchens and more
- Grid or flange installation
- Fixture is certified to UL Standards by Intertek Testing Laboratory. IP65 Rated per IEC60598. NSF2 Splash/Non-Food and Food Zone listed. Meets ISO4 Cleanroom standards.
- This product is Made in America and complies with the Buy American Act (BAA) and the Build American, Buy America Act (BABAA)



ST Series

ORDERING INFORMATION

Example: STF24-HC/OC-L440-90C-1C-A-UN



ST			/			
Series	Mounting G = Grid F = Flange	Nominal Size 14 = 1x4 22 = 2x2 24 = 2x4 *Nominal size. Dimensional data on Page 2.	Housing HC = 18Ga. CRS Painted HS = 18Ga. SS Brushed HP = 18Ga. SS Painted HA = 16Ga. Alum. Painted	Overlapping Frame OC = 18Ga. CRS Painted OS = 18Ga. SS Brushed OP = 18Ga. SS Painted OA = 16Ga. Alum. Painted	Lumen Output* ST14: L2 = Standard CL = Custom Lumen Output** ST22-24: L2 = Low L4 = Standard L6 = Medium L8 = High CL = Custom Lumen Output** *Subject to change. Performance Data on page 3. ** Must be specified at time of quote. Must not exceed fixture maximum output.	Color Temp. 35 = 3500K 40 = 4000K 50 = 5000K

CRI 80C = 80 CRI 90C = 90 CRI	Circuits 1C = 1 Circuit 2C = 2 Circuits	Lens A = .125 Prismatic Acrylic B = .125 Prismatic Poly. C = .156 Prismatic Poly. D = .187 Prismatic Poly. E = .125 White Frost Poly. G = .140 Prismatic DR Acrylic	Voltage 12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	Driver Blank = DM1 (0-10V Dimming with 1-100 range) SD2 = Step Dim. Driver* (50-100%) SD3 = Step Dim. Driver* (30-70-100%) *Consult factory for 347V.	Options FZ1 = Fuse (120V) FZ2 = Fuse (277V) EL1 = Emerg. Batt. LED Low (10W)* EL2 = Emerg. Batt. LED High (20W)* RF = (RIF) Radio Interference Filter TH = Torx® Head screws (with center pin) AM = Anti-microbial finish for all room side exposed surfaces *If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.
-------------------------------------	---	---	--	---	---

STARCLEAN™ TOP ACCESS LED SERIES

SPECIFICATIONS

HOUSING: 18-Gauge formed cold rolled steel housing with continuous seam welds. Aluminum and stainless steel options available.

FRAME: Overlapping doorframe available in aluminum, cold rolled steel, and stainless steel.

LENS: Acrylic lens with smooth side out. Alternate lens options available including Prismatic Polycarbonate and a White Frosted Polycarbonate. Overlapping frame uses a rail hold down system.

LED: Available in three color temperatures 3500K, 4000K, and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 50,000 hours with 70% lumen maintenance in a 25°C temperature ambient environment, compliant with IES LM-80 testing standards.

ELECTRICAL: 120-277VAC 50/60Hz, constant current driver (<20% THD, >0.9 PF). Standard 0-10V Dimming with 1-100% range.

FASTENERS: White polyester powder coat finish following multi-stage iron phosphate pretreatment. Optional antimicrobial finish for all room side exposed surfaces available.

FINISH: White antimicrobial polyester powder coat finish following multi-stage iron phosphate pretreatment.

GASKET: Closed cell EPDM and closed cell silicone gaskets prevent air contaminants from entering the fixture.


MOUNTING: Grid or Flange installation. Flange fixtures come with adjustable 90° swing arm for easy installation. Fixture housing accommodate a max ceiling thickness of 4". Mounting for custom ceilings available, consult factory.

WARRANTY: 5 Year Warranty.


LABEL: Fixture is certified to UL Standards by Intertek Testing Laboratory. IP65 Rated per IEC60598. NSF2 Splash/Non-Food and Food Zone listed. Meets ISO4 Cleanroom standards. This product is Made in America and complies with the Buy American Act (BAA) and the Build American, Buy American Act (BABAA).

DIMENSIONAL DATA

GRID MOUNTING



FLANGE MOUNTING

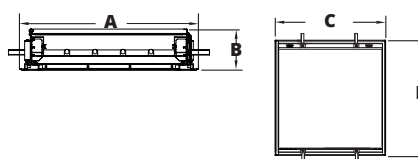

	A	B	C	D	REC. CEILING CUT-OUT
STG22	23.69"	6.41"	24.11"	23.69"	N/A
STG24	23.69"	6.41"	48.12"	23.69"	N/A
STF14	14.50"	6.75"	26.13"	14.13"	12.375" x 24.375"
STF22	26.50"	6.75"	25.13"	26.13"	24.375" x 24.375"
STF24	26.50"	6.75"	50.13"	26.13"	24.375" x 48.375"



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

STARCLEAN™ TOP ACCESS LED SERIES

PERFORMANCE DATA

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (W)
ST14	L2 = Standard	3500K	3000	120	25
		4000K	3125	125	25
		5000K	3250	130	25
ST22	L2 = Low	3500K	3000	120	25
		4000K	3125	125	25
		5000K	3250	130	25
	L4 = Standard	3500K	6000	120	50
		4000K	6250	125	50
		5000K	6500	130	50
	L6 = Medium	3500K	8625	115	75
		4000K	9000	120	75
		5000K	9375	125	75
	L8 = High	3500K	11500	115	100
		4000K	12000	120	100
		5000K	12500	125	100
ST24	L2 = Low	3500K	6000	120	50
		4000K	6250	125	50
		5000K	6500	130	50
	L4 = Standard	3500K	12000	120	100
		4000K	12500	125	100
		5000K	13000	130	100
	L6 = Medium	3500K	17250	115	150
		4000K	18000	120	150
		5000K	18750	125	150
	L8 = High	3500K	23000	115	200
		4000K	24000	120	200
		5000K	25000	125	200



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.