

51HA SERIES

PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Intended for High Abuse Areas, Apartment Buildings, School Campuses, Public Housing Complexes, Stairwells, Locker Rooms, and more
- Surface installation. Pendant Mount also available. Hardware by others
- This product is Made in America and complies with the Buy American Act (BAA) and Build America, Buy America Act (BABAA)
- The 51HA is covered by the New Star Promise

ORDERING INFORMATION

Example: 51HA4-L240-90C-1C-D-UN



51HA Series



51HA					
Series	Size	Lumen Output*	Color Temp.	CRI	Circuits
	2 = 2ft 3 = 3ft 4 = 4ft 8 = 8ft	L1 = Low L2 = High CL = Custom Lumen Output**	35 = 3500K 40 = 4000K 50 = 5000K	80C = 80 CRI 90C = 90 CRI	1C = 1 Circuit 2C = 2 Circuits*
	*Nominal Size. Dimensional Data on Page 2.	*Subject to change. Performance Data on Page 3. **Must be specified at time of quote. Must not exceed fixture maximum output. Must specify "DM1" if selecting dimming.			*Not available for L1 lumen output.

Lens	Voltage	Options
B = .125 Prismatic Poly. C = .156 Prismatic Poly. D = .187 Prismatic Poly.	I2 = 120V 27 = 277V UN = Universal (120V-277V)	FZ1 = Fuse (120V) FZ2 = Fuse (277V) SS = Stainless Steel Housing (Brushed finish) EL1 = Emerg. Battery LED 10W* EL2 = Emerg. Battery LED 20W*
		WL = Wet Location (under covered ceiling) AH = Allen Head screws with center pin reject LN = LED Night Light** RM = Row Mount*** PM = Pendant Mount (Stems/Hardware by others)
		*Consult factory for the CA Title 24 options. If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity **3500K. Non-dimming. Integrated switch allows light levels at 100%, 70%, 40% and 10% levels ***Kit includes joining hardware for field installation. Consult factory for details. ****Consult factory for 277V availability



New Star Lighting
 2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

SPECIFICATIONS

CONSTRUCTION: 16-Gauge cold rolled steel internally reinforced to provide double wall thickness at ends and corners.

LENS: .125" Clear prismatic UV-stabilized polycarbonate diffuser.

LED: Available in three color temperatures 3500K, 4000K, and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 50,000 hours with 70% lumen maintenance in a 25°C temperature ambient environment, compliant with IES LM-80 testing standards.

ELECTRICAL: 120-277VAC 50/60Hz, constant current driver (<20% THD, >0.9 PF). 0-10V Dimming available with 1-100% range.

FASTENERS: Tamper resistant Torx® head screws with center pin reject.

FINISH: White polyester powder coat finish following multistage iron phosphate pretreatment.


GASKET: Closed cell gasket to reduce light leaks.

INSTALLATION: Surface installation. Pendant Mount also available. Hardware by others.


WARRANTY: New Star Promise.

LABEL: Fixture is certified to UL standards. Suitable for Damp locations.


DIMENSIONAL DATA




51HA2

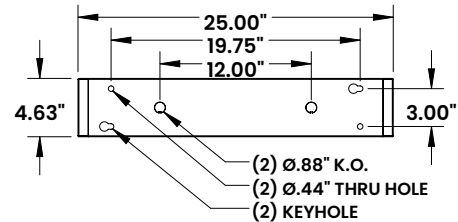


51HA3

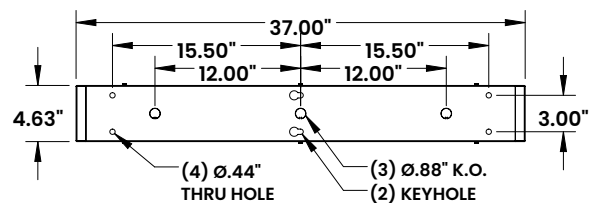

51HA4

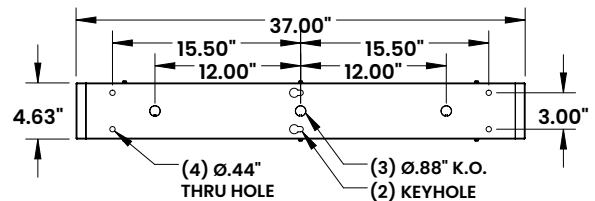

51HA8

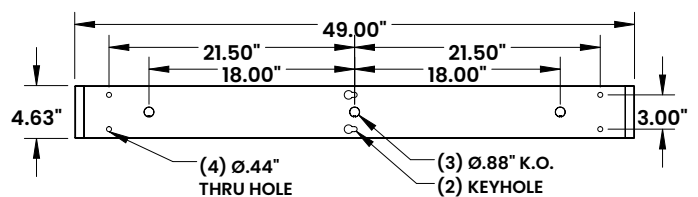

The 51HA Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.



New Star Lighting
2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

PERFORMANCE DATA

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
51HA2	L1 = Low	4000K	1375	110	12.5
	L2 = High	4000K	2750	110	25
51HA3	L1 = Low	4000K	2000	110	19
	L2 = High	4000K	4125	110	37.5
51HA4	L1 = Low	4000K	2750	110	25
	L2 = High	4000K	5500	110	50
51HA8	L1 = Low	4000K	5500	110	50
	L2 = High	4000K	11000	110	100



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400

www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.