

# 57S FLUORESCENT SERIES

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_

## PRODUCT FEATURES

- Intended for Public Housing Complexes, Stairwells, Parking Garages, Athletic Facilities and more
- Recessed Wall Installation
- Suitable for Damp Locations
- This product is Made in America and complies with the Buy American Act, and the Build America, Buy America Act



57S Fluorescent Series

## ORDERING INFORMATION

Example: 57SF-B-13Q-OP-1/B-UN



57SF		1		
<b>Series</b>	<b>Housing</b> B = 14Ga. CRS Painted C = 16Ga. CRS Painted D = 18Ga. CRS Painted F = 16Ga. SS Brushed G = 18Ga. SS Brushed	<b># of Lamps</b> 1 = Lamp	<b>Lamp Type</b> 13E = 13W Twin 2Gx7 13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3	<b>Faceplate</b> OP = Open Face LD = Louver Door*  *Lens is installed behind (inside) louver door. N/A with outer lens.

<b>Outer Lens</b> 0 = No lens* A = .125 Clear Poly. B = .156 Clear Poly. 1 = .187 Clear Poly. 2 = .250 Clear Poly. 3 = .375 Clear Poly. 5 = .187 Clear Temp. Glass  *Must use with LD louver door option.	<b>Inner Lens</b> A = .125 Prismatic Acrylic B = .125 Prismatic Poly. C = .156 Prismatic Poly.	<b>Voltage</b> 12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	<b>DB</b> = Dimming Ballast (0-10V)* <b>E1</b> = Emerg. Ballast (450lm)** <b>E2</b> = Emerg. Ballast (1350lm)** <b>FZ1</b> = Fuse (120V) <b>FZ2</b> = Fuse (277V) <b>PC</b> = Photocell* <b>AH</b> = Allen Head Screws with Center Pin Reject <b>AM</b> = White Anti-Microbial Powder Coat Finish  * Cannot use with UN voltage. ** Cannot use with UN voltage. Consult factory for T5 availability.



**New Star Lighting**  
 2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
[www.newstarlighting.com](http://www.newstarlighting.com)

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

# 57S FLUORESCENT SERIES



## SPECIFICATIONS

**CONSTRUCTION:** Choice of die-formed cold rolled steel or brushed stainless steel housing seam welded and ground smooth. Housing is secured with four (2' fixture) or eight (4' fixture) tamper-resistant stainless steel screws to maximize tight seal against mounting surface.

**FACE:** Open or louver faceplate for corresponding housing gauge.

**LENS:** As specified – maximum thickness .375" outer lens, .156" inner lens– see ordering information. Please specify prismatic inner lens and a clear outer lens.

**ELECTRICAL:** 0-10V Dimming available with 1-100% range.

**FASTENERS:** Tamper-resistant Torx® head fasteners with center pin reject. Allen Head screws with center reject pin optional.


**FINISH:** White powder coat finish following multistage iron phosphate pre-treatment.

**INSTALLATION:** Surface wall installation. Hardware by others.

**WARRANTY:** New Star Promise.

**LABEL:** Fixture is suitable for Damp Locations.

## DIMENSIONAL DATA

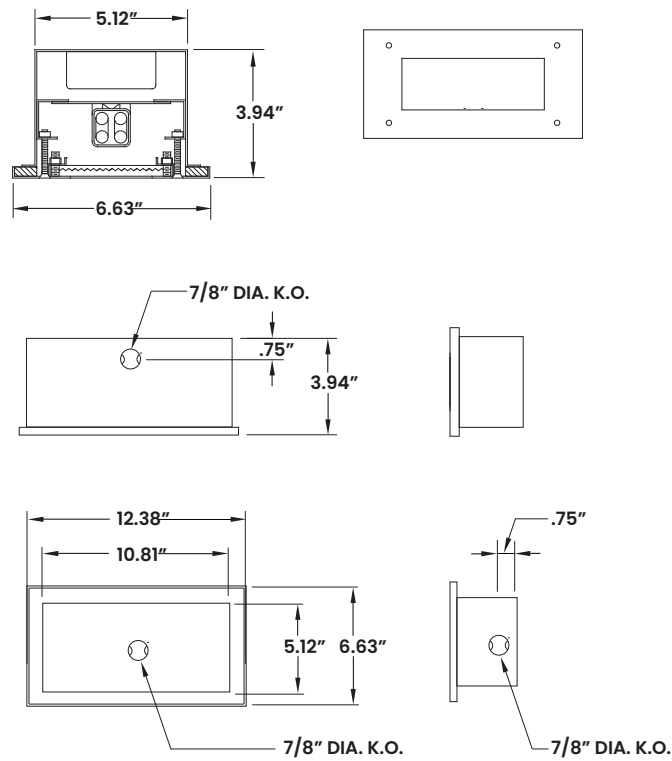

The 57S Fluorescent Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse\*.

\*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.



### New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.