

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_

## PRODUCT FEATURES

- Intended for Patient Rooms, Nurses' Stations, Waiting Areas, Lobbies, Medical Office Buildings, and more
- Provides glare-free direct ambient lighting in 2x2 and 2x4 dimensions
- Unique clip design allows for a tool-free lens removal for ease of maintenance
- Optional doorframe and lens provides a flat wipe-down surface for easy cleaning. Wet Location listed
- Recessed Grid or Flange installations. Flange installation uses yoke mounting kit (provided)
- This product is Made in America and complies with the Buy American Act (BAA), and the Build America, Buy America Act (BABAA)



AAC Series

## ORDERING INFORMATION

EXAMPLE: AACHG22-HC20-OC18/CP12-F3L40-90C-2C-RW-UN-DMI



AACH			/				
<b>Series</b>	<b>Mounting</b> G = Grid F = Flange	<b>Size*</b> 22 = 2x2 24 = 2x4  *Nominal Size. Dimensional Data on Page 2.	<b>Housing</b> HC20 = 20Ga. CRS Painted HA16 = 16Ga. Alum Painted	<b>Optional Doorframe</b> blank = No Doorframe* OC18 = Overlap 18Ga. CRS Painted OC16 = Overlap 16Ga. Alum Painted IC20 = Inset 20Ga. CRS Painted IA16 = Inset 16Ga. Alum. Painted  *If no frame is specified, do not select a frame lens. Damp location rated without a doorframe.	<b>Doorframe Lens</b> blank = No Doorframe Lens* CP12 = .125 Clear Poly. CA12 = .125 Clear Acrylic CP18 = .187 Clear Poly. CA18 = .187 Clear Acrylic  *If no frame is specified, do not select a frame lens.	<b>Function*</b> F2 = 2 Functions (Ambient & Exam) F3L = 3 Functions (Low Reading, Ambient & Exam) F3H = 3 Functions (High Reading, Ambient & Exam)**  *Subject to change. Performance Data on page 3. **N/A with AACH22	<b>Color Temp.</b> 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K TW1 = Tunable White 2700K to 5000K TW2 = Tunable White 2700K to 6500K

		RW					
<b>CRI</b> 80C = 80 CRI 90C = 90 CRI	<b>Circuits</b> 1C = 1 Circuits 2C = 2 Circuits*  *Allows for Inboard/Outboard control.	<b>Diffuser</b> RW = White Polycarbonate	<b>Voltage</b> 12 = 120V 27 = 277V UN = Universal (120-277V)	<b>Driver</b> DMI = 0-10V Dimming to 1%  <b>Tunable White Driver*:</b> TW0 = 2-Channel 0-10V DALI8  *Tunable White Driver requires choice of TW1 or TW2 in Color Temp. column	<b>Options</b> FZ1 = Fuse (120V) FZ2 = Fuse (277V) TH = Tamper-resistant Torx® head fasteners LVD = Multi-load Dimming Low Voltage Controller*  *Click <a href="#">HERE</a> for more information. Provides control of lighting from a pillow speaker, bedside rail or wall switch	<b>Accessory</b> PF = Plaster Frame Kit* EL1 = Remote Emergency Battery (10W)** EL2 = Remote Emergency Battery (20W)**  *Consult factory for details. **Consult factory for CA Title 24 options. If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity. Provided with test switch on a wall plate unless otherwise specified. Requires unswitched line.	



**New Star Lighting**  
 2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

## SPECIFICATIONS

**HOUSING:** 20-Gauge formed cold rolled steel or 16-gauge aluminum housing with continuous seam welds.

**DOORFRAME:** Optional die formed cold rolled steel or aluminum doorframe. Black neoprene gasket between the housing and doorframe.

**LENS:** Optional die-formed cold rolled steel or aluminum doorframe and optional .125" or .187" clear polycarbonate or acrylic lens to provide a flat wipe-down surface for easy cleaning. Black neoprene gasket between the housing and doorframe.

**LED:** LED sources available in four color temperatures 3000K, 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Tunable White also available, from 2700K - 5000K or 2700K - 6500K. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature environment, compliant with IES LM-80 testing standards.

**ELECTRICAL:** 120-277VAC 50/60HZ electrical input high power factor electronic, constant current driver (<20% THD, >0.90 PF). Each function is independently circuited for individual control. Standard 0-10V dimming with 1-100% range for ambient and reading functions. Step dimming options available.

**OPTIONAL TUNABLE WHITE DRIVER:**

**TWO** - Two Channel 0-10V dimming; one channel for brightness, one channel for CCT

**LOW VOLTAGE CONTROL:** The LVD allows multiple loads (functions) to turn on at once to achieve specified light levels. It is factory set to provide: Load 1 (reading) with 0-10V dimming control, Load 1 + 2 (ambient) with 0-10V dimming control, and Load 1 + 2 + 3 (exam) for on/off control. The LVD is provided on one circuit that operates through low voltage. The exam function can be wired to a low voltage wall switch (all drivers are connected to one low voltage controller)

**FASTENERS:** Stainless steel Philips flat head fasteners with captive cage nuts when doorframe option is selected.


**FINISH:** White antimicrobial polyester powder coat finish following multi-stage iron phosphate pretreatment.

**INSTALLATION:** Grid or Flange installation. Grid installation compatible with 1-1/2" and 15/16" Grid systems. Flange installation uses yoke mounting kit (provided). Mounting for custom ceilings available, consult factory.


**WARRANTY:** 5 Year Warranty.

**LABEL:** Fixture is certified to UL standards by Intertek Testing Laboratories for Wet Location (under covered ceiling) when a doorframe is used. This product was Made in America and complies with the Buy American Act (BAA), and the Build America, Buy America Act (BABAA).


## DIMENSIONAL DATA




**CROSS SECTION WITHOUT DOOR**



**CROSS SECTION WITH DOOR**

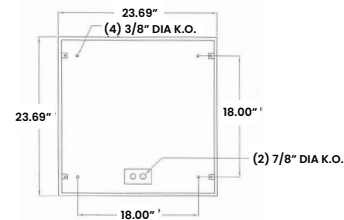


**AAC22 BACKVIEW**

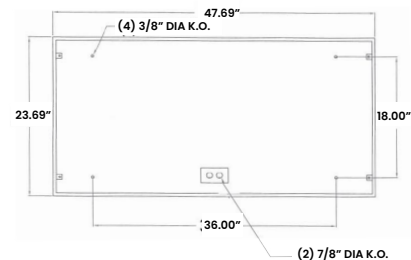

**AAC24 BACKVIEW**

## LOW VOLTAGE CONTROL DIAGRAM

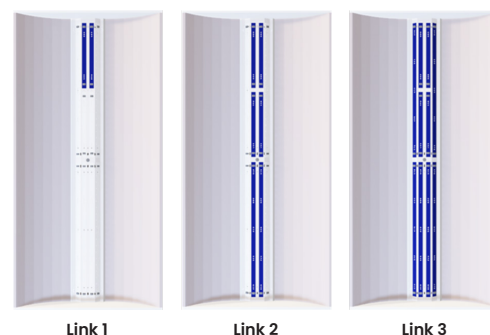

## PERFORMANCE DATA\*

\*Data is with 80 CRI chip. Tested without an outer lens. LEDs are frequently updated therefore values may change without notice.

MODEL	FUNCTION	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
AACH22	F2 = Ambient & Exam	Ambient	30 = 3000K	2450	98	25
			35 = 3500K	2575	103	25
			40 = 4000K	2650	106	25
			50 = 5000K	2725	109	25
		Exam = All LED boards	30 = 3000K	4750	95	50
			35 = 3500K	5000	100	50
			40 = 4000K	5150	103	50
			50 = 5000K	5300	106	50
	F3L = Low Reading, Exam	Low Reading	30 = 3000K	1250	100	12.5
			35 = 3500K	1313	105	12.5
			40 = 4000K	1350	108	12.5
			50 = 5000K	1388	111	12.5
		Ambient = Reading + Ambient	30 = 3000K	2450	109	25
			35 = 3500K	2575	114	25
			40 = 4000K	2650	117	25
			50 = 5000K	2725	120	25
		Exam = All LED boards	30 = 3000K	4750	95	50
			35 = 3500K	5000	100	50
			40 = 4000K	5150	103	50
			50 = 5000K	5300	106	50



**PERFORMANCE DATA\***

\*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	FUNCTION	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)	
AACH24	F2 = Ambient & Exam	Ambient	30 = 3000K	5450	109	50	
			35 = 3500K	5700	114	50	
			40 = 4000K	5850	117	50	
			50 = 5000K	6000	120	50	
		Exam = All LED boards	30 = 3000K	10600	106	100	
			35 = 3500K	11100	111	100	
			40 = 4000K	11400	114	100	
			50 = 5000K	11700	117	100	
	F3L = Low Reading, Exam	Low Reading	30 = 3000K	1362.5	109	12.5	
			35 = 3500K	1425	114	12.5	
			40 = 4000K	1475	118	12.5	
			50 = 5000K	1512	121	12.5	
		Ambient = Reading + Ambient	30 = 3000K	5400	108	50	
			35 = 3500K	5650	113	50	
			40 = 4000K	5850	117	50	
			50 = 5000K	6000	120	50	
		Exam = All LED boards	30 = 3000K	10600	106	100	
			35 = 3500K	11100	111	100	
			40 = 4000K	11400	114	100	
			50 = 5000K	11800	118	100	
		F3H = High Reading, Ambient Exam	High Reading	30 = 3000K	2625	105	25
				35 = 3500K	2750	110	25
				40 = 4000K	2826	113	25
				50 = 5000K	2900	116	25
	Ambient = Reading + Ambient		30 = 3000K	5400	108	50	
			35 = 3500K	5650	113	50	
			40 = 4000K	5850	117	50	
			50 = 5000K	6000	120	50	
Exam = All LED boards	30 = 3000K		10600	106	100		
	35 = 3500K		11100	111	100		
	40 = 4000K		11400	114	100		
	50 = 5000K		11800	118	100		

