# **COMPLETECARE™ FRAME WALL SCONCE** SERIES



PROJECT:
TYPE:
PRODUCT:
APPROVED BY:

#### **PRODUCT FEATURES**

- Intended for Patient Rooms, Nurse Stations, Patient Bathrooms,
   Nurse Stations, Offices, Corridors, Building Facades, and more
- · Nominal one foot height
- Field Selectable White CCT (2700K 5000K)
- Amber night light (585-595nm)
- Fixture is IP64 rated per IEC60598 and NSF2 Splash Zone/Non-Food Zone listed



**CCF** Series







#### **ORDERING INFORMATION**

Example: CCFB-1-CCT-+PCC(00000)-BL-UN-DM1

CCF		1	сст		
Series	Style B = Box O = Oval V = V-Shape	Size* 1 = 1ft  *Nominal Size. Dimensional Data on Page 2.	Field-Selectable Color Temp. CCT = 2700K-5000K	Lens blank = Opal PMMA (std.)  Please CLICK HERE to go to image selection guide (insert code in place)  +PCC(#) = custom image*  *Provide your own image (must be 150dpi at 100% image size).	Finish* blank = Standard White ALM = Almond (RAL 9001) ARG = Argento (RAL 7035) BLK = Black BL = Blue (RAL 5009) LB = Light Blue (RAL 6034) LIC = Lilac (RAL 4009) PG = Pistachio Green (RAL 6024) CC = Custom RAL Color**  *Color swatches on Page 3.

	DM1
Voltage	Driver Type
<b>12</b> = 120V	<b>DM1</b> = 0-10V Dimming with 1-100%
<b>27</b> = 277V	
<b>UN</b> = Universal (120V-277V)	



Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

### **COMPLETECARE™ FRAME WALL SCONCE SERIES**



#### **SPECIFICATIONS**

**CONSTRUCTION:** Tapered diecast aluminum housing frame, and heavy-weight heavy-gauge steel baseplate. Concealed Torx® fastener on top of housing for easy installation.

**LENS:** PMMA diffusing lens. Optional PositiveCare graphic images can be incorporated onto lens, second surface printing for cleanabiity. For image gallery, click <u>here</u>.


**LED:** Available in five field-selectable color temperatures 2700K, 3000K, 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Nightlight is amber (585-595nm) LED.


**ELECTRICAL:** 120-277Vac 50/60Hz, constant current driver (<20% THD, >0.9 PF). Standard 0-10V Dimming with 1-100% range

WARRANTY: 5 year warranty.

**LABEL:** Fixture is IP64 rated per IEC60598. NSF2 Splash Zone/Non-Food Zone listed.

#### **DIMENSIONAL DATA**

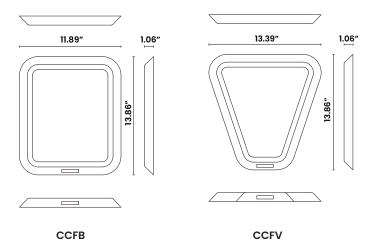



**CCFO** 

MODEL	HEIGHT	DEPTH	WIDTH	WATTAGE	сст	LUMEN
CCFB	13.86"	1.06"	11.89"	11	5	850
CCFV	13.86"	1.06″	13.39"	11	5	850
CCFO	15.35"	1.06"	10.92"	11	5	850

## **COMPLETECARE™ FRAME WALL SCONCE SERIES**



#### **FINISHES**

Almond (RAL 9001) (ALM) 138/15003	Argento (RAL 7035) (ARG) 138/90470	Blue (RAL 5005) (BL) 149/47310	White (blank)
Light Blue (RAL 5024) (LB) 138/50034	Lilac (RAL 4009) (LIC) 149/34740	Pistachio Green (RAL 6024) (PG) 230/51120	Black (BLK)