

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_



CCREL Quick Ship Series

## PRODUCT FEATURES

- Intended for Commercial applications such as offices, medical office buildings, corridors, lobbies, waiting rooms, and more
- 5 Day Quick Ship for orders with a minimum of 10 fixtures, maximum of 50 fixtures
- Ceiling or wall surface mount installation
- Red or green legend, optional single or double face
- Fixture is certified to UL standards for Damp Locations, UL924 Listed and meets or exceeds NFPA 101 Life Safety Code
- This product is Assembled in America and complies with Buy American Act (BAA) requirements



## ORDERING INFORMATION

Example: CCREL-SFRW-CWH-QS

CCREL						QS
<b>Series</b>	<b>Face</b> SF = Single Face DF = Double Face	<b>Lettering</b> RW = Red Letters GW = Green Letters	<b>Panel</b> C = Clear* M = Mirror WH = White <small>*With single face only</small>	<b>Housing Color</b> WH = White BK = Black AL = Aluminum	<b>Options</b> CUS = Custom Signage EM = Emergency Battery* SDT = Self-Diagnostics** WM = Wall Mount*** SPV = 208/220/240 Volt, 50/60Hz**** 120 = Dual Circuit with 120V Input* 270 = Dual Circuit with 277V Input* USA = Assembled in USA	QS = Quick Ship <small>*If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity            **Available only with EM units            ***With single face only            ****Not available with SDT            *Not available with EM units</small>



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
[www.newstarlighting.com](http://www.newstarlighting.com)

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

## SPECIFICATIONS

**CONSTRUCTION:** Extruded aluminum housing. Extruded aluminum trim assembly is easily detachable, providing accessibility for service or maintenance. Single or double face configurations. Self-adhesive Chevron appliques and guide template provided for directional indication. Double face utilizes factory installed silver or white mylar background panel.

**LENS:** UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.

**LED:** Ultra bright, energy efficient, long life Red or Green LEDs.

**ELECTRICAL:** Dual 120V/277V standard. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. 4.8V long life, maintenance-free rechargeable NiCd battery (EM models only).


**INSTALLATION:** Ceiling or wall surface mount installation

**FINISH:** Available in black or white power-coated finishes.

**WARRANTY:** Limited five (5) year warranty.

**LABEL:** Fixture is certified to UL standards for Damp Locations, UL924 Listed, and meets or exceeds NFPA 101 Life Safety Code. This product is Made in America and complies with the Buy American Act (BAA).

## DIMENSIONAL DATA

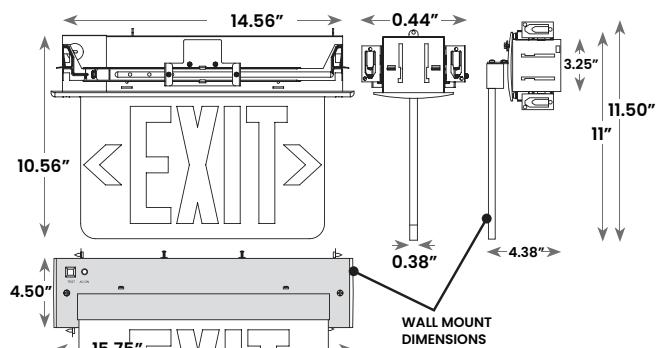

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.