

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Commercial applications such as offices, medical office buildings, corridors, lobbies, waiting rooms, and more
- 5 Day Quick Ship for orders with a minimum of 10 fixtures, maximum of 50 fixtures
- Ceiling or wall surface mount installation
- Red or green legend, optional single or double face
- Fixture is certified to UL standards for Damp Locations
- This product is Assembled in America and complies with Buy American Act (BAA) requirements



CCREL Quick Ship Series

ORDERING INFORMATION

Example: CCREL-SFRW-CWH-QS



CCREL					QS	
Series	Face SF = Single Face DF = Double Face	Lettering RW = Red Letters GW = Green Letters	Panel C = Clear* M = Mirror WH = White *With single face only	Housing Color WH = White BK = Black AL = Aluminum	Options CUS = Custom Signage EM = Emergency Battery* SDT = Self-Diagnostics** WM = Wall Mount*** SPV = 208/220/240 Volt, 50/60Hz**** 120 = Dual Circuit with 120V Input+ 270 = Dual Circuit with 277V Input+ USA = Assembled in USA *If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity **Available only with EM units ***With single face only ****Not available with SDT *Not available with EM units	QS = Quick Ship



SPECIFICATIONS

CONSTRUCTION: Extruded aluminum housing. Extruded aluminum trim assembly is easily detachable, providing accessibility for service or maintenance. Single or double face configurations. Self-adhesive Chevron appliques and guide template provided for directional indication. Double face utilizes factory installed silver or white mylar background panel.

LENS: UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.

LED: Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL: Dual 120V/277V standard. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. 4.8V long life, maintenance-free rechargeable NiCd battery (EM models only).


INSTALLATION: Ceiling or wall surface mount installation

FINISH: Available in black or white power-coated finishes.

WARRANTY: Limited five (5) year warranty.

LABEL: Fixture is certified to UL standards for Damp Locations. This product is Made in America and complies with the Buy American Act (BAA).

DIMENSIONAL DATA

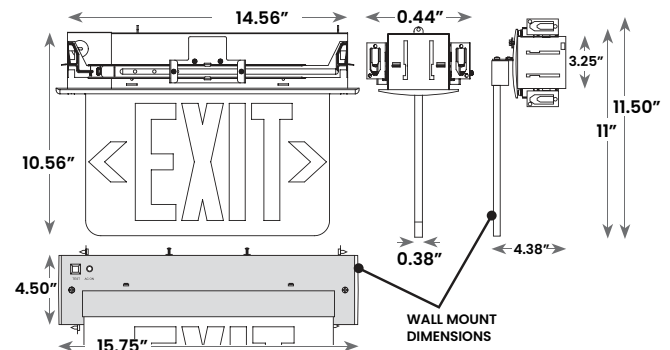

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.