

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

PRODUCT: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_

PRODUCT FEATURES

- Vanity mirrors for Healthcare, Assisted Living, Medical Office Buildings, Multi-Family or other commerical bathroom settings
- Low profile, ADA-compliant surface mount in rectangle or oval shapes
- Corrosion-resistant, copper-free mirror provides clear imaging, high reflectance, better color rendition and durability
- LED Lighting with high color rendering (90 CRI), as well as red rendering (R9>60) for skin tone evaluation
- Amber (585nm-595nm) or White (2700K-4000K) nightlight options
- Fixture is certified to UL Standards by Intertek Testing Laboratory for non-IC. NSF2 Splash/Non-Food Zone listed



CCVMR



CCVMO

ORDERING INFORMATION

Example: CCVMR-35-90C-AMB-SB-UN-DM2



CCVM					
Series	Style R = Rectangle O = Oval	Color Temp. 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	CRI 90C = 90 CRI	Nightlight AMB = Amber (585nm-595nm) 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	Frame Finish* SB = Brushed Stainless Steel ALM = Almond (RAL 9001) ARG = Argento (RAL 7035) BLK = Black BL= Blue (RAL 5009) LB = Light Blue (RAL 6034) LIC = Lilac (RAL 4009) PG = Pistachio Green (RAL 6024) WH = White CC = Custom RAL Color**  *Antimicrobial finishes are standard. **Color swatches on Page 3.
UN		DM2			
Voltage UN = Universal (120-277V)		Driver Type DM2 = 0-10v 0-100% dimming range or Triac/Phase Dimming.		Options TB = 5° Tilt Bracket*  *Only available in CCVMR (Rectangle)	

## SPECIFICATIONS

**CONSTRUCTION:** Surface mount cold rolled steel housing.  
Closed-cell neoprene gasket seals mirror to wall.

**FRAME:** Mirror frame is constructed of stainless steel.  
Antimicrobial white, black or custom powder coat finishes are available. Frame secured to housing with flush stainless steel tamper-resistant Torx® fasteners.

**MIRROR:** Corrosion and scratch-resistant, copper-free mirror provides clear imaging, high reflectance, better color rendition and durability. LED shielding is constructed of scratch-resistant polycarbonate lens.

**LED:** LED modules are available in 2700K, 3000K, 3500K, and 4000K with maximum 3-step MacAdam variation allowance. Minimum 90CRI standard. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature, compliant with IES LM-80 testing standards.

**DRIVER:** Integral Constant Voltage 60W 12v/24VDC, 100-277v, 50/60Hz, 0-10v dimming with 0-100% range or, Triac/Phase dimming optional.

**FASTENERS:** Flush stainless steel Torx® head fasteners with center reject pin.



**FINISH:** Brushed stainless steel frame standard. Choice of white, black or custom color antimicrobial polyester powder coat finish following multistage iron phosphate pretreatment on all exposed surfaces, unless otherwise specified.

**INSTALLATION:** Surface mount installation.

**WARRANTY:** Five (5) year warranty period.

**LABEL:** Fixture is certified to UL Standards by Intertek Testing Laboratory for non-IC. Certified for NSF2 Splash Zone/Non-Food Zones.

## DIMENSIONAL DATA

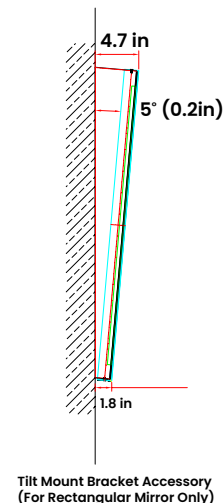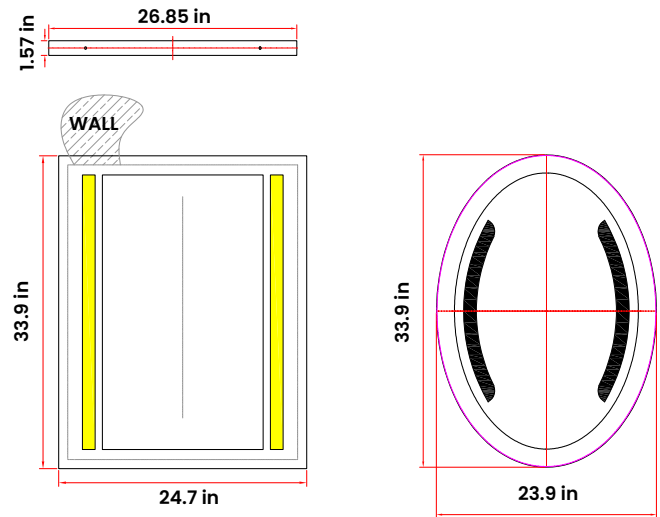

## PERFORMANCE DATA

\*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

	CRI	COLOR TEMP	TOTAL DELIVERED LUMENS	EFFICACY(lm/W)	INPUT POWER (W)	WEIGHT (lbs)
CCVMR (RECTANGLE)	90	3000K	737	11	58	25
		3500K	776	11	61	
		4000K	817	12	64	
		5000K	860	13	67	
		Amber	83	1	66	
	CRI	COLOR TEMP	TOTAL DELIVERED LUMENS	EFFICACY(lm/W)	INPUT POWER (W)	WEIGHT (lbs)
CCVMO (OVAL)	90	3000K	588	12	42	25
		3500K	619	13	44	
		4000K	652	13	46	
		5000K	686	14	49	
		Amber	145	2	69	


## FINISHES

Almond (RAL 9001)  
(ALM)  
138/15003

Argento (RAL 7035)  
(ARG)  
138/90470

Blue (RAL 5005)  
(BL)  
149/47310

White  
(blank)

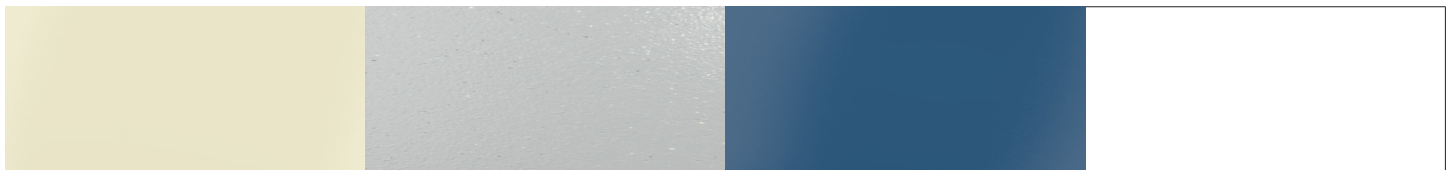

Light Blue (RAL 5024)  
(LB)  
138/50034

Lilac (RAL 4009)  
(LIC)  
149/34740

Pistachio Green (RAL 6024)  
(PG)  
230/51120

Black  
(BLK)



**New Star Lighting**  
2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.