

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_



CPP Series

## PRODUCT FEATURES

- Intended for Patient Rooms, Exam Rooms, Recovery Areas, Skilled Nursing and more
- Recommended to be used in pairs adjacent to the patient bed. Sold individually. Must order a "left" and a "right" for a complete pair
- Provides ambient, exam, reading, and night light illumination.
- Fixture is certified to UL standards by Intertek Testing Laboratory.
- Suitable for damp locations
- This product is Made in America and complies with the Buy American Act (BAA), and the Build America, Buy America Act (BABAA)

## ORDERING INFORMATION

Example: CPPG4R-HC/OC-L140-L240-2C-A-RI-LN-90C-UN-DM1-LV3

| CPP  |   |  |  | /  |   | L1   |   |
|--|---|--|--|--|---|--|---|
| <b>Series</b><br><b>G</b> = Grid<br><b>F</b> = Flange* | <b>Mounting</b><br><b>2</b> = 2ft.<br><b>4</b> = 4ft. | <b>Size*</b><br><b>2</b> = 2ft.<br><b>4</b> = 4ft. | <b>Position</b><br><b>L</b> = Left<br><b>R</b> = Right | <b>Housing</b><br><b>HC</b> = 20Ga. CRS Painted<br><b>HS</b> = 20Ga. SS Brushed<br><b>HP</b> = 20Ga. SS Painted<br><b>HA</b> = 16Ga. Alum. Painted | <b>Doorframe</b><br><b>Inset (I) or Overlap (O)</b><br><b>OC</b> = 18Ga. CRS Painted<br><b>OS</b> = 18Ga. SS Brushed<br><b>OP</b> = 18Ga. SS Painted<br><b>OA</b> = 16Ga. Alum Painted<br><b>IA</b> = 16Ga. Alum Painted<br><b>IB</b> = 20Ga. SS Brushed<br><b>IC</b> = 20Ga. CRS Painted<br><b>IS</b> = 20Ga. SS Painted | <b>Ambient</b><br><b>Lumen Output*</b><br><b>L1</b> = Standard | <b>Ambient Color Temp.</b><br><b>35</b> = 3500K<br><b>40</b> = 4000K<br><b>50</b> = 5000K |

|  |  | 2C  |  |   |  |   |
|--|--|---|--|---|--|---|
| <b>Exam</b><br><b>Lumen Output*</b><br><b>L1</b> = Low<br><b>L2</b> = Standard<br><b>L3</b> = High | <b>Exam</b><br><b>Color Temp.</b><br><b>35</b> = 3500K<br><b>40</b> = 4000K<br><b>50</b> = 5000K | <b>Circuits</b><br><b>2C</b> = 2 Circuits | <b>Lens</b><br><b>A</b> = .125 Prismatic Acrylic<br><b>B</b> = .125 Prismatic Poly.<br><b>C</b> = .156 Prismatic Poly.<br><b>D</b> = .187 Prismatic Poly.<br><b>E</b> = .125 White Frost Poly. | <b>Reading Light*</b><br><b>blank</b> = No Reading<br><b>RI</b> = LED Integral Light* | <b>Night Light</b><br><b>blank</b> = No Night Light<br><b>LN</b> = Integral Night Light* | <b>CRI</b><br><b>80</b> = 80 CRI<br><b>90</b> = 90 CRI<br>(Ambient & Exam only) |

| DM1   |   |
|---|---|
| <b>Voltage</b><br><b>12</b> = 120V<br><b>27</b> = 277V<br><b>UN</b> = Universal (120V-277V) | <b>Driver</b><br><b>DM1</b> = 0-10V dimming with 1-100% range |

**Options**  
**FZ1** = Fuse (120V)  
**FZ2** = Fuse (277V)  
**EL1** = Emergency Battery Low\*  
**TH** = Torx Head screws (with center pin)  
**LV3** = Low Voltage Controller (Reading, Ambient & Night Light)\*\*

\*If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.

\*\*Pillow switch by others. One Low Voltage Controller is required per Pair unless otherwise specified. Leads are factory labeled.



**New Star Lighting**  
 2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
[www.newstarlighting.com](http://www.newstarlighting.com)

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

## SPECIFICATIONS

**HOUSING:** 20-Gauge formed housing, seam welded and ground smooth. Available in aluminum, cold rolled steel, and stainless steel.

**DOORFRAME:** Inset and overlapping doorframe available in aluminum, cold rolled steel, and stainless steel.

**LENS:** Ambient and Exam lens available in .125" Prismatic Acrylic, and Prismatic Polycarbonate or White Frosted Polycarbonate options.

**LED:** Available in three color temperatures (3500K, 4000K and 5000K) with maximum 3-step MacAdam variation allowance. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature environment, compliant with IES LM-80 testing standards.

**ELECTRICAL:** 120-277VAC 50/60Hz input, high power factor, constant current driver (<20% THD, >0.90 PF). Standard 0-10V dimming with 1-100% range for ambient and night light (if night light is selected). Ambient and Exam compartments default to 2 circuits (1 Ambient, 1 Exam) unless otherwise specified. Reading and/or Night Light each supplied with an additional independent circuit.

**LOW VOLTAGE CONTROL:** The Low Voltage Control (LVC3) option controls ambient function with dimming, and reading is non-dimming (on/off). The Exam and Night Light functions are on separate line voltage circuits; the nightlight LED board has (4) settings that are field selectable. The exam is typically wired to a wall switch (by others) and is dimmable. Other configurations are available – consult factory. One low voltage controller per pair is recommended. Leads are factory labeled for field installation. Controls and any additional accessories by others.

**FINISH:** White antimicrobial polyester powder coat finish following multi-stage iron phosphate pretreatment.



**INSTALLATION:** Grid or Flange installation. Flange fixtures are shipped with yoke and hardware to mount yoke to fixture.

**WARRANTY:** 5 Year Warranty.



**LABEL:** Fixture is certified to UL standards by Intertek Testing Laboratories. Suitable for damp locations. This product is Made in America and complies with Buy American Act (BAA), and the Build America, Buy America Act (BABAA).

## DIMENSIONAL DATA

**CPP2**

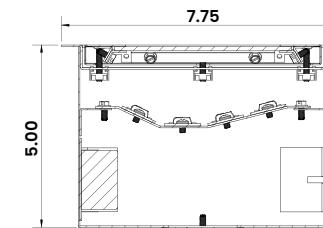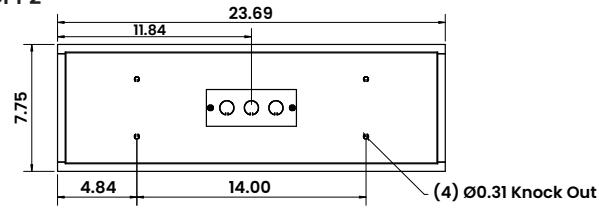


**CPP4**

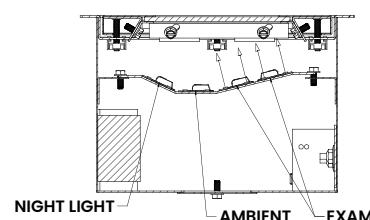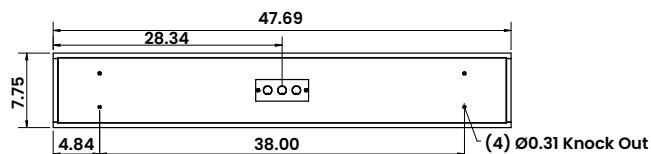

## ORDERING EXAMPLE

Sold as a single unit. Recommended to be used in pairs adjacent to patient bed. Order a "Left" and a "Right" for a complete pair (2 separate line items). Consult factory with additional questions.

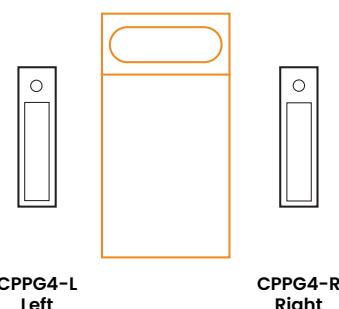

CPPG4-L  
Left

CPPG4-R  
Right



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

## PERFORMANCE DATA\*

\*Data for individual unit. LEDs are frequently updated therefore values may change without notice.

| MODEL | FUNCTION | OUTPUT                          | COLOR TEMP. | LUMENS DELIVERED | EFFICACY (lm/W) | INPUT POWER (W) |
|-------|----------|---------------------------------|-------------|------------------|-----------------|-----------------|
| CPP2  | Ambient  | Standard<br>(Prismatic Lens)    | 3500K       | 1100             | 88              | 12.5            |
|       |          |                                 | 4000K       | 1150             | 92              | 12.5            |
|       |          |                                 | 5000K       | 1200             | 96              | 12.5            |
|       |          | Standard<br>(White Frost. Lens) | 3500K       | 975              | 78              | 12.5            |
|       |          |                                 | 4000K       | 1025             | 82              | 12.5            |
|       |          |                                 | 5000K       | 1075             | 86              | 12.5            |
|       | Exam     | Low<br>(Prismatic Lens)         | 3500K       | 1250             | 96              | 13              |
|       |          |                                 | 4000K       | 1300             | 100             | 13              |
|       |          |                                 | 5000K       | 1350             | 104             | 13              |
|       |          | Standard<br>(Prismatic Lens)    | 3500K       | 1700             | 94              | 18              |
|       |          |                                 | 4000K       | 1750             | 97              | 18              |
|       |          |                                 | 5000K       | 1800             | 100             | 18              |
|       |          | High<br>(Prismatic Lens)        | 3500K       | 2100             | 91              | 23              |
|       |          |                                 | 4000K       | 2150             | 93              | 23              |
|       |          |                                 | 5000K       | 2200             | 96              | 23              |
|       |          | Low<br>(White Frost. Lens)      | 3500K       | 1050             | 81              | 13              |
|       |          |                                 | 4000K       | 1100             | 85              | 13              |
|       |          |                                 | 5000K       | 1150             | 88              | 13              |
|       |          | Standard<br>(White Frost. Lens) | 3500K       | 1450             | 81              | 18              |
|       |          |                                 | 4000K       | 1500             | 83              | 18              |
|       |          |                                 | 5000K       | 1550             | 86              | 18              |
|       |          | High<br>(White Frost. Lens)     | 3500K       | 1700             | 74              | 23              |
|       |          |                                 | 4000K       | 1750             | 76              | 23              |
|       |          |                                 | 5000K       | 1800             | 78              | 23              |
|       | Reading  |                                 | 3000K       | 200              | 50              | 4               |
| CPP4  | Ambient  | Standard<br>(Prismatic Lens)    | 3500K       | 2200             | 88              | 25              |
|       |          |                                 | 4000K       | 2300             | 92              | 25              |
|       |          |                                 | 5000K       | 2400             | 96              | 25              |
|       |          | Standard<br>(White Frost. Lens) | 3500K       | 1950             | 78              | 25              |
|       |          |                                 | 4000K       | 2050             | 82              | 25              |
|       |          |                                 | 5000K       | 2150             | 86              | 25              |
|       | Exam     | Low<br>(Prismatic Lens)         | 3500K       | 2500             | 96              | 26              |
|       |          |                                 | 4000K       | 2600             | 100             | 26              |
|       |          |                                 | 5000K       | 2700             | 104             | 26              |
|       |          | Standard<br>(Prismatic Lens)    | 3500K       | 3400             | 94              | 36              |
|       |          |                                 | 4000K       | 3500             | 97              | 36              |
|       |          |                                 | 5000K       | 3600             | 100             | 36              |
|       |          | High<br>(Prismatic. Lens)       | 3500K       | 4200             | 91              | 46              |
|       |          |                                 | 4000K       | 4300             | 93              | 46              |
|       |          |                                 | 5000K       | 4400             | 96              | 46              |



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400

www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

## PERFORMANCE DATA\*

\*LEDs are frequently updated therefore values may change without notice.

| MODEL | FUNCTION | OUTPUT                          | COLOR TEMP. | LUMENS DELIVERED | EFFICACY (lm/W) | INPUT POWER (W) |
|-------|----------|---------------------------------|-------------|------------------|-----------------|-----------------|
| CPP4  | Exam     | Low<br>(White Frost. Lens)      | 3500K       | 2100             | 81              | 26              |
|       |          |                                 | 4000K       | 2200             | 85              | 26              |
|       |          |                                 | 5000K       | 2300             | 88              | 26              |
|       |          | Standard<br>(White Frost. Lens) | 3500K       | 2900             | 81              | 36              |
|       |          |                                 | 4000K       | 3000             | 83              | 36              |
|       |          |                                 | 5000K       | 3100             | 86              | 36              |
|       |          | High<br>(White Frost. Lens)     | 3500K       | 3400             | 74              | 46              |
|       |          |                                 | 4000K       | 3500             | 76              | 46              |
|       |          |                                 | 5000K       | 3600             | 78              | 46              |
|       | Reading  |                                 | 3000K       | 200              | 50              | 4               |



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
[www.newstarlighting.com](http://www.newstarlighting.com)

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.