

HIGH ABUSE FRAME WALL SCONCE SERIES



PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Student Housing Facilities, Stairwells, Park & Rec Public Access Areas, Retail Exteriors and more
- Nominal one foot height
- Field Selectable White CCT (2700K - 5000K)
- Amber night light (585-595nm)
- Fixture is IP64 rated per IEC60598



HAF Series

ORDERING INFORMATION

Example: HAFB-1-CCT-PM-BL-UN-DM1



HAF		1	CCT		
Series	Style B = Box O = Oval V = V-Shape	Size* 1 = 1ft *Nominal Size. Dimensional Data on Page 2.	Field-Selectable Color Temp. CCT = 2700-5000K	Lens blank = Opal PMMA (std.) Please CLICK HERE to go to image selection guide (insert code in place) +PCC(#) = custom image* *Provide your own image (must be 150dpi at 100% image size).	Finish* blank = Standard White ALM = Almond (RAL 9001) ARG = Argento (RAL 7035) BLK = Black BL = Blue (RAL 5009) LB = Light Blue (RAL 6034) LIC = Lilac (RAL 4009) PG = Pistachio Green (RAL 6024) CC = Custom RAL Color** *Color swatches on Page 3.

	DM1
Voltage 12 = 120V 27 = 277V UN = Universal (120V-277V)	Driver Type DM1 = 0-10V Dimming with 1-100%



New Star Lighting
2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

SPECIFICATIONS

CONSTRUCTION: Tapered diecast aluminum housing frame, and heavy-weight heavy-gauge steel baseplate. Concealed Torx® fastener on top of housing for easy installation.

LENS: Opal PS diffusing lens, silicone sealed to housing. Optional PositiveCare graphic images can be incorporated onto lens, second surface printing for cleanability. For image gallery, click [here](#).

LED: Available in five field-selectable color temperatures 2700K, 3000K, 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Tunable White option in 2700K-5000K. Tunable White drivers must be selected.

ELECTRICAL: 120-277Vac 50/60Hz, constant current driver (<30% THD, >0.9 PF). Standard 0-10V Dimming with 1-100% range.

FINISH: White antimicrobial power coat finish standard, additional color choices available. Consult factory for custom colors.

WARRANTY: New Star Promise.

LABEL: Certified to UL standards by Intertek Testing Laboratory. IP65 rated per IEC60598. IK10 Listed per IEC60068-2-75.

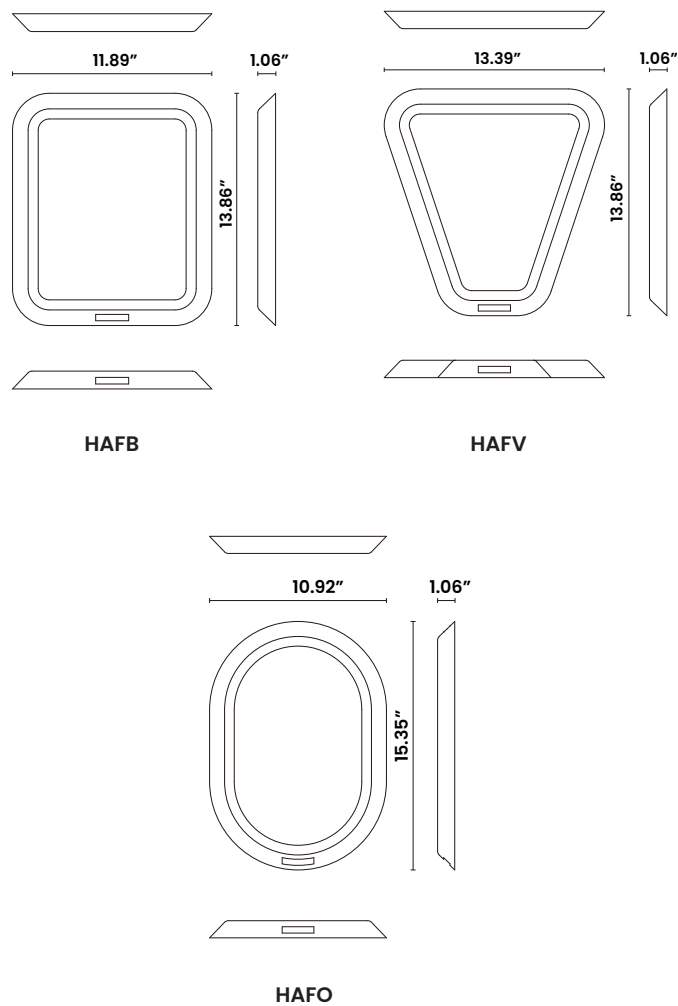


The High Abuse Frame Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.

DIMENSIONAL DATA






MODEL	HEIGHT	DEPTH	WIDTH	WATTAGE	CCT	LUMEN
HAFB	13.86"	1.06"	11.89"	11	5	850
HAFV	13.86"	1.06"	13.39"	11	5	850
HAFO	15.35"	1.06"	10.92	11	5	850

HIGH ABUSE FRAME WALL SCONCE SERIES



FINISHES

Almond (RAL 9001) (ALM) 138/15003	Argento (RAL 7035) (ARG) 138/90470	Blue (RAL 5005) (BL) 149/47310	White (blank)
			
Light Blue (RAL 5024) (LB) 138/50034	Lilac (RAL 4009) (LIC) 149/34740	Pistachio Green (RAL 6024) (PG) 230/51120	Black (BLK)
			



New Star Lighting
2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.