

HIGH ABUSE LINEAR WALL SERIES
*PRELIMINARY CUTSHEET



PROJECT:
TYPE:
PRODUCT:
APPROVED BY:

PRODUCT FEATURES

- Intended for Public Areas, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more
- Designed for recessed wall installations
- One-piece doorframe with continuous lens retention and tamper-resistant fasteners
- Certified to UL standards by Intertek Testing Laboratory. IP65 rated per IEC60598. NSF2/Non-Food Zone Listed, IK10 Listed per IEC60068-2-75
- This product is Made in America and complies with the Buy American Act requirements



HALW Series

ORDERING INFORMATION

Example: HALW48-FL-500-90-35-AM-D-SYM-UN-DM1



HALW						
Series	Nominal Length* 24 = 2' 36 = 3' 48 = 4' 72 = 6' 96 = 8' <small>*Available in 1' increments. Consult factory for other lengths.</small>	Ceiling Configuration FL = Flange TM = Trimless Mud-In for 5/8" Drywall	Lumen Output* 500 = 500LM/FT-Min 1200 = 1200LM/FT-Max <small>*Outputs between listed min and max are available.</small>	CRI 80 = 80 CRI 90 = 90 CRI	Color Temp. 30 = 3000K 35 = 3500K 40 = 4000K TW1 = Tunable White 2700K to 5000K* TW2 = Tunable White 2700K to 6500K* <small>*Must select TW Driver</small>	Finish AM = Antimicrobial White* C = Custom** <small>*Standard finish **Consult factory for NSF</small>
Outer Lens D = .250 Clear Poly.		Inner Lens SYM = Symmetrical ASY = Asymmetrical	Voltage 12 = 120V 27 = 270V 34 = 347V* UN = Universal (120V-277V) <small>*347V only available with DM1 Drivers</small>	Driver Type DM1 = 0-10V Dimming to 1% Tunable White Driver*: DALI8 = 1-Channel TWO = 2-Channel 0-10V <small>*Tunable White Driver requires choice of TW1 or TW2 in Color Temp. column</small>	Options B(#) = Battery Pack GTD(1) = Generator transfer device +E(1) = Emergency section <small>*Available for fixture lengths of 4' or greater</small>	

HIGH ABUSE LINEAR WALL SERIES

*PRELIMINARY CUTSHEET

SPECIFICATIONS

HOUSING: Extruded aluminum construction with sheet metal endcaps. Closed cell neoprene pad in doorframe.

LENS: Combination of acrylic and/or polycarbonate prismatic inner lens, clear outer lens, maximum thickness 0.25" for durability.

DOORFRAME: Die-formed aluminum doorframe, with antimicrobial white powder-coat finish, secured with tamper-resistant Torx® fasteners. Safety aircraft cable also secures doorframe to housing for easy maintenance.

LED: Available in three color temperatures 3000K, 3500K, and 4000K with maximum 3-step MacAdam variation allowance. Tunable White also available, from 2700K – 5000K or 2700K-6500K. Minimum 50,000 hours with 85% lumen maintenance in a 25°C ambient temperature, compliant with IES LM-80 testing standards.

ELECTRICAL: Standard 120-277VAC 50/60Hz or 347VAC 60Hz electrical input with serviceable constant-current drivers (<10% THD, >0.90 PF). 0-10V Dimming with 1-100% range.

TUNABLE DRIVER OPTIONS:

DALI8 – DALI Type 8 (One DALI Address)

TWO – Two channel 0-10V dimming: one channel for brightness, one channel for CCT



FINISH: Antimicrobial white finish following multi-stage iron phosphate pre-treatment on all exposed room-side surfaces. Custom finishes also available.

INSTALLATION: Drywall Flange and Mud-In Flange options.

WARRANTY: Five (5) year warranty.

LISTINGS: Fixture is certified to UL standards by Intertek Testing Laboratory. IP65 Rating per IEC60598. Certified for NSF2 Splash Zone/ Non-Food Zones. Standard CCEA compliance.

DIMENSIONAL DATA

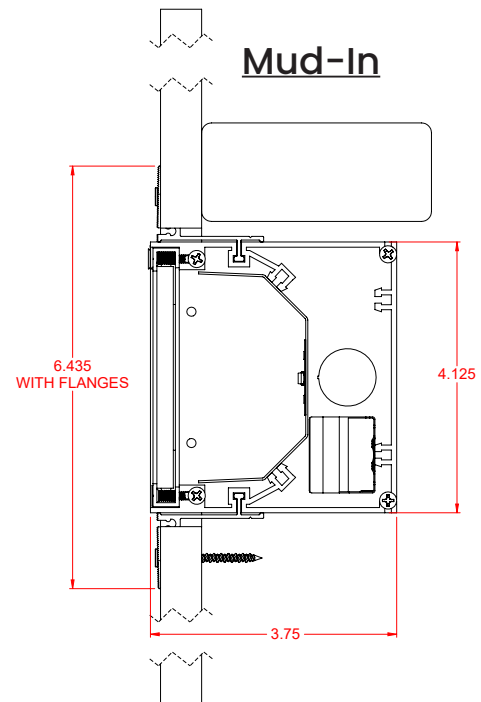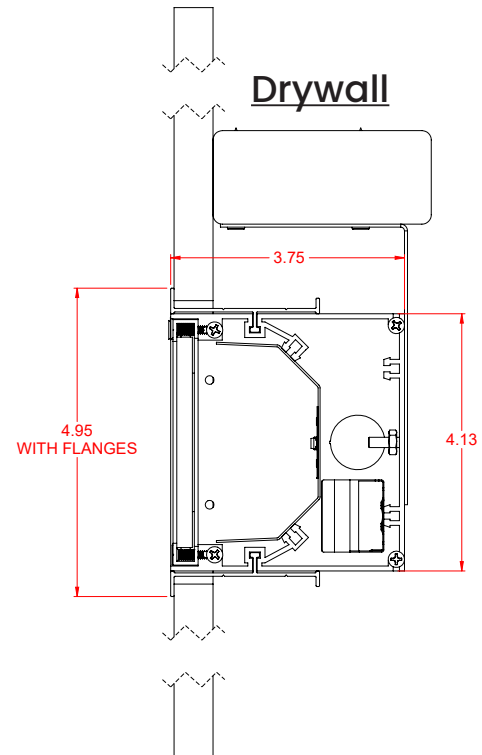

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

HIGH ABUSE LINEAR WALL SERIES

***PRELIMINARY CUTSHEET**



PERFORMANCE DATA

Model	Light Distribution	CCT	Lumens per Foot	Efficacy (lm/W)	Input Power (W)
HALW24	Symmetric	4000K	500	95	11
	Symmetric	4000K	1181	95	25
	Asymmetric	3000K	500	85	12
	Asymmetric	3000K	1067	85	25
HALW36	Symmetric	4000K	500	95	16
	Symmetric	4000K	1181	95	37
	Asymmetric	3000K	500	85	18
	Asymmetric	3000K	1067	85	38
HALW48	Symmetric	4000K	500	95	21
	Symmetric	4000K	1181	95	50
	Asymmetric	3000K	500	85	23
	Asymmetric	3000K	1067	85	50
HALW72	Symmetric	4000K	500	95	32
	Symmetric	4000K	1181	95	75
	Asymmetric	3000K	500	85	35
	Asymmetric	3000K	1067	85	75
HALW96	Symmetric	4000K	500	95	42
	Symmetric	4000K	1181	95	99
	Asymmetric	3000K	500	85	47
	Asymmetric	3000K	1067	85	100



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.