


STARMED™ M3R LED SERIES



PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Intended for Patient Rooms, Exam Rooms, Procedure Rooms, Recovery Areas, Skilled Nursing, and more
- Three-compartment 2x4 with Ambient, Exam & Reading functions
- Recessed Grid / Flange installation with universal housing
- Sealed for infection control with IP65 rating per IEC60598
- This product was Made in America and complies with the Buy American Act (BAA), and the Build America, Buy America Act (BABAA)

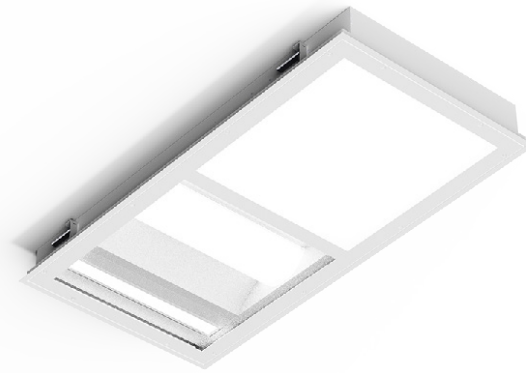

M3R Series



ORDERING INFORMATION

Example: M3R24-HC/IC-L650-L340-90C-3C-E/A-UN-DM1-LV3

M3	R	24	/			
Series	Mounting R = Recessed (Grid/Flange)	Size* 24 = 2x4 *Nominal Size. Dimensional Data on Page 2.	Housing HC = 20Ga. CRS Painted HS = 20Ga. SS Brushed HP = 20Ga. SS Painted HA = 16Ga. Alum. Painted	Inset Frame IC = 18Ga. CRS Painted IA = 16Ga. Alum. Painted IB = 18Ga. SS Brushed IS = 18Ga. SS Painted	Exam Lumen Output* L4 = Low L6 = Standard L8 = High *Subject to change. Performance data on Page 3.	Exam Color Temp. 35 = 3500K 40 = 4000K 50 = 5000K
				3C	/	
Ambient Lumen Output* L2 = Low L3 = Standard L4 = High **Subject to change. Performance Data on page 3. Ambient Compartment diffused with a white ribbed poly. lens.		Ambient Color Temp. 35 = 3500K 40 = 4000K 50 = 5000K TW1 = Tunable White 2700K to 5000K* TW2 = Tunable White 2700K to 6500K* *Available for ambient function only. See Page 2 to specify system.	CRI 80C = 80 CRI 90C = 90 CRI	Circuits* 3C = 3 Circuits *Refers to main compartment circuits. Consult factory for additional options.	Exam Lens E = .125 White Frosted Poly. F = .125 White Frosted Acrylic	Ambient/Reading Overlay* A = .125 Clear Acrylic B = .125 Clear Poly. *Clear lens overlay for ambient and reading compartments to create surface for easy cleaning.
Voltage 12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)		Driver Type DMI = 0-10V Dimming to 1% Tunable White Driver* TW0 = 2 CHANNEL 0-10V TWD = 2 CHANNEL DALI8 *Tunable White Driver requires choice of TW1 or TW2 in Color Temp column.		Options FZ1 = Fuse (120V) FZ2 = Fuse (277V) EL1 = Emerg. Bat. LED Low (10W)* RF = (RIF) Radio Interference Filter** TH = Tamper-resistant Torx® head fasteners LN = LED Night Light*** LV3 = Dimming Low Voltage Controller**** AM = Anti-microbial finish for all room side exposed surfaces *If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity. **N/A with 347V. ***3500K non-dimming Night Light with integrate switch allows light levels at 100%, 70%,40% and 10% ****LV3 controls ambient function with dimming. Exam and Night Light (if specified) are on separate line voltage circuits. N/A with emergency battery.		



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

SPECIFICATIONS

HOUSING: 20-Gauge formed cold rolled steel housing with seam welded and ground smooth. Aluminum and stainless steel options available.

DOORFRAME: Sealed inset doorframe provides surface for cleanability and IP rating. Doorframe is available in aluminum, stainless steel or cold rolled steel with a clear .125 acrylic or polycarbonate lens. Frame held to housing via aircraft cable.

LENS: .125" White frosted polycarbonate or acrylic shields high performing Exam compartment. Ambient compartment shielded by a white ribbed polycarbonate inner lens. Reading light (3000K std) is a patented rotatable frosted polycarbonate lens inside an aluminum frame.

LED: Available in three color temperatures 3500K, 4000K, and 5000K with maximum 3-step MacAdam variation allowance. Tunable White also available, from 2700K - 5000K or 2700K - 6500K. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature environment, compliant with IES LM-80 testing standards.

ELECTRICAL: 120-277VAC or 347VAC 50/60HZ electrical input high power factor electronic, constant current driver (<20% THD, >0.90 PF). Standard 0-10V dimming with 1-100% range for ambient and reading only.

OPTIONAL TUNABLE WHITE DRIVERS:

TWO = 2 CHANNEL 0-10V one channel for brightness, one channel for CCT

TWD = 2 CHANNEL DALI8 one channel for brightness, one channel for CCT

LOW VOLTAGE CONTROL: The Low Voltage Control (LVC3) option controls ambient function with dimming, and reading is non-dimming (on/off). The Exam and Night Light functions are on separate line voltage circuits; the nightlight LED board has (4) settings that are field selectable. The exam is typically wired to a wall switch (by others) and is dimmable. Other configurations are available – consult factory. Leads are factory labeled for field installation. Controls and any additional accessories by others.

FASTENERS: Stainless steel Philips flat head fasteners with captive cage nuts. Finish to match housing.

FINISH: White polyester powder coat finish following multi-stage iron phosphate pretreatment. Optional antimicrobial finish for all room side exposed surfaces available.



GASKET: Closed cell EPDM and closed cell silicone gaskets prevent air contaminants from entering the fixture..

INSTALLATION: Universal recessed mounting accommodates Grid and Flange installations. Luminaires will be supplied with adjustable swing arms that can be used for Flange applications or secured to the side of housing for Grid applications. Compatible with 1-1/2" and 15/16" Grid systems. Mounting for custom ceilings available, consult factory.

WARRANTY: 5 Year Warranty.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratories. Certified IP65 per IEC60598. This product is Made in America and complies with Buy American Act (BAA), and the Build America, Buy America Act (BABAA).

DIMENSIONAL DATA

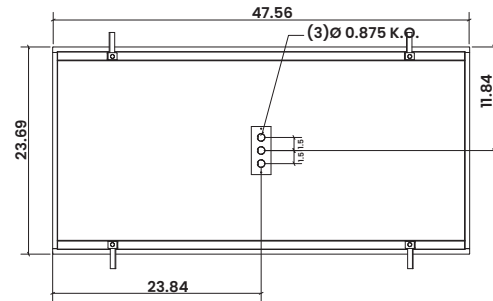

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

PERFORMANCE DATA*

*Delivered lumens are subject to change.

MODEL	FUNCTION	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
M3	Exam	L4 = Low	4000K	5900	115	50
		L6 = Medium	4000K	8700	115	80
		L8 = High	4000K	11700	115	100
	Ambient	L2 = Low	4000K	2375	95	25
		L3 = Medium	4000K	3500	95	37.5
		L4 = High	4000K	4750	95	50
	Reading	Standard	3000K	760	54	15



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.