

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Chicago-approved Exit and Stair Signage for Modular Cleanrooms, Hospitals, Hi-Tech Manufacturing, Laboratories, Food Processing Facilities, Commercial Kitchens, and more
- 2" Depth accommodates shallow wall plenums and modular rooms
- Single face silk screened polycarbonate lens with Chicago compliant signage
- NSF2 Splash/Non-Food Zone listed. Fixture is certified to UL standards for Wet Locations, UL924 Listed, and meets or exceeds NFPA 101 Life Safety Code. IP65 Rated per IEC60598. Meets standards for ISO 3/Class 1 Cleanrooms. Meets city of Chicago requirements. CCEA approved.
- This product is Made in America and complies with the Buy American Act (BAA), and the Build America, Buy America Act (BABAA)



StarClean MODex Chicago Series



ORDERING INFORMATION

Example: MODC-HS-OS-RW-90C

MODC					
Series	Housing HC = 20Ga. CRS Painted HP = 20Ga. SS Painted HS = 20Ga. SS Mill Finish	Overlap Frame OC = 18Ga. CRS Painted OP = 18Ga. SS Painted OS = 18Ga. SS Brushed	Lettering NA = Exit No Arrow SNA = Stair No Arrow DA = Exit Double Arrow SDA = Stair Double Arrow RA = Exit Right Arrow* LA = Exit Left Arrow* SRA = Stair Right Arrow* SLA = Stair Left Arrow* LARA = Left Arrow Right Arrow SLARA = Stair Left Arrow Right Arrow *Available in single face configuration only.	CRI 80C = 80 CRI 90C = 90 CRI	Options EM = Emergency Battery (remote) *If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.

SPECIFICATIONS

HOUSING: 20-Gauge formed stainless steel housing with continuous seam welds.

FRAME: Single face overlapping doorframe in 18-gauge stainless steel.

LENS: .125 Clear polycarbonate lens.

LED: Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature environment, compliant with IES LM-80 testing standards.

ELECTRICAL: Long life LED system illuminates Red single face legend. 7W. Legend illuminated by internal high output LEDs. Lettering 6" high with .750" stroke.

WEIGHT: 10 lbs.

FASTENERS: Stainless steel Phillips fasteners. Finish to match frame.

FINISH: White glossy antimicrobial polyester powder coat finish following multi-stage iron phosphate pre-treatment. Brushed stainless steel overlapping frame will be left unpainted if specified.




GASKET: Closed-cell EPDM and closed-cell silicone gaskets prevent air contaminants from entering the fixture.

INSTALLATION: Recessed installation. Suitable for modular walls.

WARRANTY: Limited five (5) year warranty.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory. IP65 rating per IEC60598. Meets standards for ISO3/ Class 1 Cleanrooms. NSF2 Splash/Non-Food Zone. UL924 Listed and meets or exceeds NFPA 101 Life Safety Code. Meets city of Chicago requirements. CCEA approved. This product is Made in America and complies with the Buy American Act (BAA) and the Build America, Buy American Act (BABAA).

DIMENSIONAL DATA

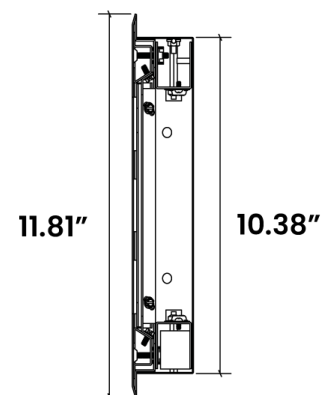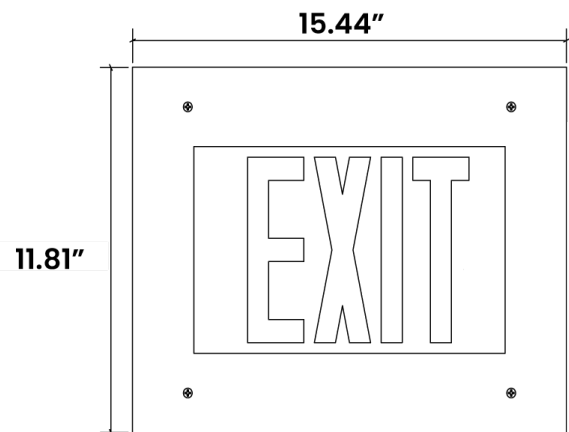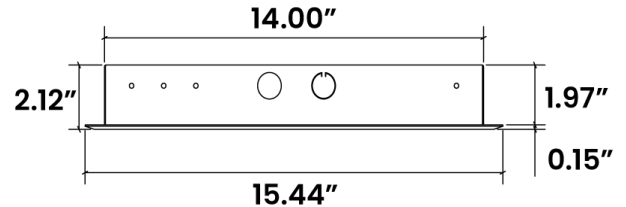

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.