

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_

## PRODUCT FEATURES

- Intended for Task Lighting, Patient Rooms, Nurse Stations, Medical Offices, Research Facilities, Laboratories, and more
- Available in three sizes: 1ft, 18in, 2ft, 3ft and 4ft
- Easy installation with keyhole slots
- White antimicrobial finish standard
- Fixture is certified to UL standard by Intertek Testing Laboratory for Damp Locations
- This product is Made in America and complies with the Buy American Act (BAA) and the Build America Buy America Act (BABAA)



MUS

## ORDERING INFORMATION

Example: MUS2-HC-L135-90C-A-UN-DM



MUS		L1		
<b>Series</b>	<b>Size*</b> 1 = 1ft 18 = 18in 2 = 2ft 3 = 3ft 4 = 4ft  *Nominal Size. Dimensional Data on Page 2.	<b>Housing</b> HC = 20Ga. CRS Painted HA = 16Ga. Alum. Painted	<b>Lumen Output*</b> L1 = Standard  *Subject to change. Performance data on Page 2.	<b>Color Temp.</b> 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K

A		DM		
<b>CRI</b> 80C = 80 CRI 90C = 90 CRI	<b>Lens</b> A = .125 Prismatic Acrylic	<b>Voltage</b> 12 = 120V 27 = 277V UN = Universal (120V-277V)	<b>Driver</b> DM = 0-10V dimming with 10-100% range	<b>Options</b> FZ1 = Fuse (120V) FZ2 = Fuse (277V) RM = Row Mount (consult factory) RS = Rocker Switch (120V) CO = Convenience Outlet (120V) OC = Occupancy Sensor

## SPECIFICATIONS

**HOUSING:** 20-Gauge formed cold rolled steel housing with continuous seam welds and ground smooth. Aluminum option available.

**LENS:** .125" prismatic acrylic lens.

**LED:** Available in three color temperatures 3000K, 3500K and 4000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature environment, compliant with IES LM-80 testing standards.

**ELECTRICAL:** 120/277VAC 50/60HZ standard integral 0-10V dimming driver available with 10-100% range.




**FINISH:** White antimicrobial polyester powder coat finish following multi-stage iron phosphate pretreatment.

**INSTALLATION:** Surface installation. Keyhole slots for easy installation. Mounting screws are not provided.

**WARRANTY:** 5 Year Warranty.

**LABEL:** Fixture is certified to UL standards by Intertek Testing Laboratory for Damp Location. This product was Made in America and complies with the Buy American Act (BAA).

## DIMENSIONAL DATA

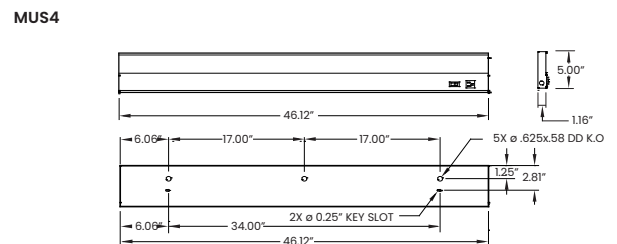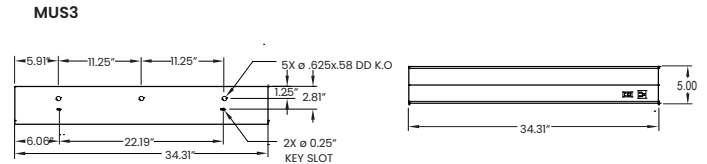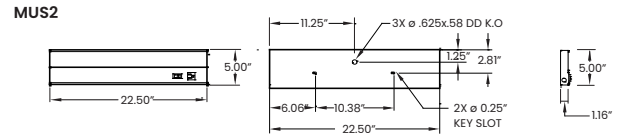

## PERFORMANCE DATA\*

\*LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (w)
MUS1	L1 = Standard	4000K	625	100	6
MUS18	L1 = Standard	4000K	937	100	9
MUS2	L1 = Standard	4000K	1250	100	12
MUS3	L1 = Standard	4000K	1875	100	18
MUS4	L1 = Standard	4000K	2500	100	25