

NSELCR CHICAGO-APPROVED RECESSED EXIT/STAIR EDGELIT SERIES



PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Chicago plenum-approved recessed edgelit sign for stairwells, corridors, commercial settings, and more
- Ceiling or wall surface mount installation
- Red legend, optional single or double face
- Fixture is certified to UL standards for Damp Locations (0°C - 50°C), UL924 Listed and meets or exceeds NFPA 101 Life Safety Code



NSELCR Series

ORDERING INFORMATION

Example: NSELCR-SF-RW-AL-NA



NSELCR		RW		
Series	Face SF = Single Face DF = Double Face	Lettering RW = Red Letters	Housing AL = Aluminum WH = White SS = Brushed 304 Stainless Steel SW = 304 Stainless Steel Painted	Battery blank = AC Only EM-CW = Emergency Battery

<p>Directional Arrows NA = Exit No Arrow SNA = Stair No Arrow DA = Exit Double Arrow SDA = Stair Double Arrow RA = Exit Right Arrow* SRA = Stair Right Arrow* LA = Exit Left Arrow* SLA = Stair Left Arrow* LARA = Exit Left/Right Arrow** SLARA = Stair Left/Right Arrow**</p> <p>*Available in single face configuration only **Available in double face configuration only</p>	<p>Options WM = Wall Mount* 10Y = 10 Year Warranty TH = Torx® Head Tamper-Resistant Fasteners</p> <p>*Available in single face configuration only</p>
---	---



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

NSELCR CHICAGO-APPROVED RECESSED EXIT/STAIR EDGELIT SERIES



SPECIFICATIONS

HOUSING: Premium-grade, extruded aluminum housing. Extruded aluminum or optional stainless steel trim assembly is easily detachable, providing accessibility for service or maintenance. Also available in optional white finish.

LENS: UV-stabilized silk screened acrylic edgelit panel provides consistent, uniform illumination.

ELECTRICAL: Dual 120/277 voltage, 50/60Hz standard. Energy-efficient, long life Red LEDs. Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing. 4.8V long life, maintenance-free rechargeable NiCd battery (EM models only). Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.


FASTENERS: Stainless steel Philips fasteners. Optional tamper-resistant Torx® head fasteners available.

INSTALLATION: Compatible with drywall or drop-thru ceiling mount installations. Wall mount capability optional.


WARRANTY: Five (5) year warranty on all electronics and housing. Battery prorated for five years.

LABEL: Fixture UL Listed for Damp Locations (0°C - 50°C). This product is UL924 Listed and meets or exceeds NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. Meets city of Chicago requirements. CCEA approved. Certified to CEC under Title 20 Regulations.

DIMENSIONAL DATA

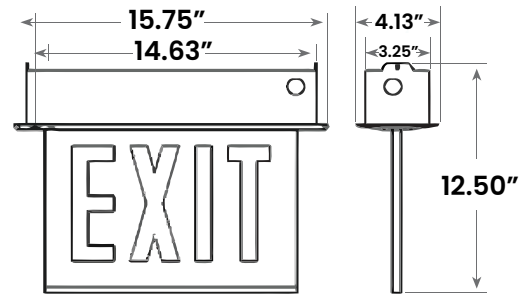

Wall Mount Dimensions

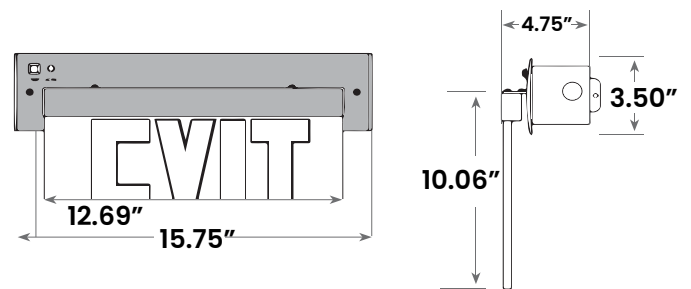

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.