

PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____



NSELN Series

PRODUCT FEATURES

- NYC-Compliant edgelit sign for stairwells, corridors, commercial settings, and more
- Ceiling or wall surface mount installation
- 8" EXIT red letters, optional single or double face
- Fixture is certified to UL standards for Damp Locations (0°C – 50°C), UL924 Listed and meets or exceeds NFPA 101 Life Safety Code
- This product is Assembled in America and complies with Buy American Act requirements

ORDERING INFORMATION

Example: NSELN-SF-RW-C-WH-SDT

NSELN	RW					
Series	Face SF = Single Face DF = Double Face	Lettering RW = Red Letters	Panel C = Clear* M = Mirror WH = White <small>*With single face only</small>	Housing Color WH = White BK = Black AL = Aluminum	Battery blank = AC Only EM = Battery Backup	Options SDT = Self-Diagnostics* SPV = 208/220/240 Volt, 50/60Hz** <small>*Available only with EM units **Not available with SDT</small>



SPECIFICATIONS

CONSTRUCTION: Premium-grade, extruded aluminum housing (also available in optional black or white powder-coated finish). Single or double face configurations. Self-adhesive Chevron appliques and guide template provided for directional indication.

LENS: UV-stabilized clear acrylic edgelit panel provides consistent, uniform illumination. Double face utilizes factory-installed silver or white mylar background panel. New York City compliant 8" EXIT letters.

ELECTRICAL: Dual 120/277 voltage standard, 208/220/240 Volt 50/60Hz optional. Energy-efficient, long life Red LEDS. Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing. 4.8V long life, maintenance-free rechargeable NiCd battery (EM models only). Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.


FASTENERS: Stainless steel Philips fasteners.

INSTALLATION: Aluminum mounting canopy included for top, end or back mount. Available in optional black or white powder-coated finishes.

WARRANTY: Five (5) year warranty on all electronics and housing. Battery prorated for five years.

LABEL: Fixture UL Listed for Damp Locations (0°C - 50°C). This product is UL924 Listed and meets or exceeds NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. This product is Assembled in America and complies with the Buy American Act (BAA).

DIMENSIONAL DATA

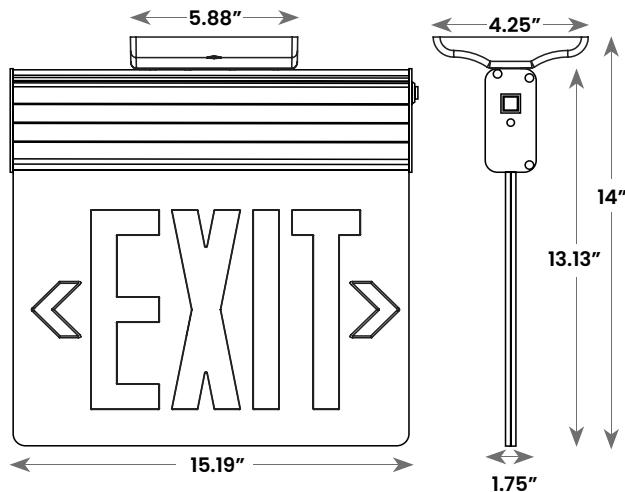

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.