

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- NYC-Compliant recessed edgelit sign for stairwells, corridors, commercial settings, and more
- Recessed ceiling or optional wall mount installation
- 8" EXIT red letters, optional single or double face
- Fixture is certified to UL standards for Damp Locations (0°C - 50°C), UL924 Listed and meets or exceeds NFPA 101 Life Safety Code
- This product is Assembled in America and complies with Buy American Act requirements



NSELNR Series



ORDERING INFORMATION

Example: NSELNR-SF-RW-C-W-EM

| NSELNR | | RW | | | | |
|--------|--|-------------------------------|--|---|---|---|
| Series | Face SF = Single Face DF = Double Face | Lettering RW = Red Letters | Panel C = Clear* M = Mirror WH = White *Single face only | Trim Plate WH = White BK = Black AL = Aluminum | Battery blank = AC Only EM = Battery Backup | Options SDT = Self-Diagnostics* SPV = 208/220/240 Volt, 50/60Hz** WM = Wall Mount*** *Available only with EM units **Not available with SDT ***Single face only |

SPECIFICATIONS

CONSTRUCTION: Extruded aluminum housing. Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. Available in black or white powder-coated finishes. Self-adhesive Chevron appliques and guide template provided for directional indication.

LENS: UV-stabilized clear acrylic edgelit panel provides consistent, uniform illumination. Double face utilizes factory installed silver or white mylar background panel. New York City compliant 8" EXIT letters.

ELECTRICAL: Dual 120/277 voltage standard, optional 208/220/240 Volt, 50/60Hz. Energy-efficient, long life Red or Green LEDs. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 4.8V long life, maintenance-free rechargeable NiCd battery (EM models only). Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

ELECTRICAL OPTIONS:

SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.


FASTENERS: Stainless steel fasteners.

INSTALLATION: Compatible with drywall or drop ceiling mount installations. Bar hangers included. Wall mount capability optional.

WARRANTY: Five (5) year warranty on all electronics and housing. Battery prorated for five years.

LABEL: Fixture UL Listed for Damp Locations (0°C - 50°C). This product is UL924 Listed and meets or exceeds NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. This product is Assembled in America and complies with the Buy American Act (BAA).

DIMENSIONAL DATA

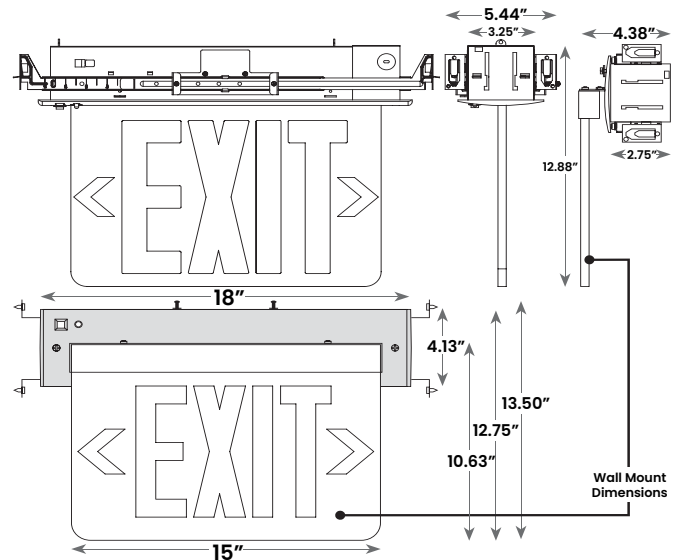

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.