

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Cleanrooms, BSL Labs, Hi-Tech Manufacturing, Laboratories, Food Processing Facilities, Commercial Kitchens, and more
- 10 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Cleanroom troffer available in 2x4. Other dimensions available with standard lead times
- Surface Installation
- Meets ISO3/Class 1 Cleanroom standards, IP65 rated per IEC60598, NSF2 Splash/Non-Food Zone ratings
- This product is Made in America and complies with the Buy American Act (BAA), and the Build American, Buy America Act (BABAA).



SCS Quick Ship Series

ORDERING INFORMATION

Example: SCS24-HC/OC-L440-90C-1C-A-UN-SD3-QS



SC		S		24	HC		/OC			
Series		Mounting S = Surface		Nominal Size* 24 = 2x4 *Nominal size. Dimensional data on Page 2.	Housing HC = 20Ga. CRS Painted		Overlapping Frame OC = 18Ga. CRS Painted		Lumen Output* L2 = Low L4 = Standard L6 = Medium L8 = High *Subject to change. Performance Data on page 3.	Color Temp. 35 = 3500K 40 = 4000K
					UN					QS
CRI 80C = 80 CRI 90C = 90 CRI		Circuits 1C = 1 Circuit 2C = 2 Circuits* *Allows for Inboard/Outboard control.		Lens A = .125 Prismatic Acrylic B = .125 White Prismatic Poly. C = .156 Prismatic Poly. E = .125 White Frost Poly. G = .140 Prismatic DR Acrylic* *Not rated for Wet Locations	Voltage UN = Universal (120V-277V)		Driver Blank = DM1 (0-10V Dimming with 1-100% range) SD2 = Step Dim. Driver (50-100%) SD3 = Step Dim. Driver (30-70-100%)		Options EL1 = Emerg. Batt. LED Low (10W)* EL2 = Emerg. Batt. LED High (20W)* WP = 6ft. Flex Whip. Supply wires included only unless otherwise specified *If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.	Quick Ship QS = Quick Ship

SPECIFICATIONS

HOUSING: 20-Gauge formed cold rolled steel housing with continuous seam welds.

FRAME: Overlapping doorframe in cold rolled steel. Frame held to housing via aircraft cable.

LENS: Acrylic or polycarbonate lens options – smooth side out.

LED: Available in two color temperatures 3500K, 4000K, and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 80 CRI standard with optional minimum 90 CRI available.

ELECTRICAL: 120-277VAC 50/60HZ electrical input high power factor electronic, constant current driver (<20% THD, >0.90 PF). Standard 0-10V Dimming with 1-100% range.

FASTENERS: Stainless steel Phillips flat head screws with captive cage nuts. Finish to match doorframe.

FINISH: White antimicrobial polyester powder coat finish following multi-stage iron phosphate pretreatment.

GASKET: Closed cell EPDM and closed cell silicone gaskets prevent air contaminants from entering the fixture. Gasketing seals lens to doorframe and doorframe to housing.



INSTALLATION: Surface installation. Hardware by others. Mounting for custom ceilings available, consult factory.

WARRANTY: 5 Year Warranty.

LABEL: Fixture is certified to UL standards for Wet Location. Meets standards for ISO3/Class 1 Cleanrooms. IP65 rating per IEC60598, and NSF2 Splash/Non-Food Zone listed. This product is Made in America and complies with the Buy American Act (BAA) and the Build American, Buy America Act (BABAA).

DIMENSIONAL DATA

Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information. Average weight of the SCS24 is 48lb.

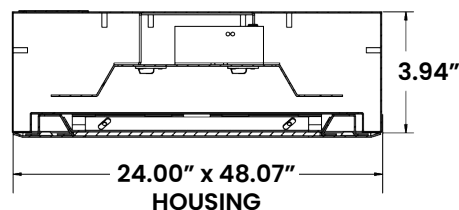

PERFORMANCE DATA*

*Displayed information is with a .125 Prismatic Polycarbonate. Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
SCS24	L2 = Low	3500K	6000	120	50
		4000K	6250	125	50
		5000K	6500	130	50
	L4 = Standard	3500K	12000	120	100
		4000K	12500	125	100
		5000K	13000	130	100
	L6 = Medium	3500K	17250	115	150
		4000K	18000	120	150
		5000K	18750	125	150
	L8 = High	3500K	23000	115	200
		4000K	24000	120	200
		5000K	25000	125	200