

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Cleanrooms, Laboratories, Food Processing Facilities, and more
- 10 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Available in 2x2 and 2x4
- Fixture is certified to UL standards for Wet Location by Intertek Testing Laboratory, ISO Class 5 (Fed Std. 209E/ Class 100)
- This product is Made in America and complies with the Buy American Act (BAA)



SCU Quick Ship Series

ORDERING INFORMATION

Example: SCUG22-HC/IP-L440-1C-A-UN-QS



SCU	G		HC	IP	
Series	Mounting G = Grid	Size* 22 = 2 x 2 24 = 2 x 4 *Nominal Size. Dimensional Data on Page 2.	Housing HC = 20Ga. CRS Painted	Inset Frame IP = Extruded Alum. Painted	Lumen Output* L4 = Standard L6 = High *Subject to change. Performance Data on Page 2.
40	1C	A	UN		QS
Color Temp.* 40 = 4000K *80 CRI Standard	Circuits 1C = 1 Circuit	Lens A = .125 Prismatic Acrylic	Voltage UN = Universal (120V-277V)	Options WP = 6ft. Flex Whip. Supply wires included only unless otherwise specified FK = Flange Conversion Kit. Consult factory for additional information	QS = Quick Ship



SPECIFICATIONS

HOUSING: 20-Gauge formed cold rolled steel housing.

FRAME: Inset extruded door available in aluminum. Door sealed to housing with latch.

LENS: .125" Prismatic acrylic lens

LED: Available in 4000K with maximum 3-step MacAdam variation allowance. Other options available in standard offering. Minimum 50,000 hours with 70% lumen maintenance in an ambient environment 25°C temperature, compliant with IES LM-80 testing data.

ELECTRICAL: 120-277Vac 50/60Hz, constant current driver (<20% THD, >0.9 PF). Standard 0-10V Dimming with 1-100% range.

FINISH: White powder coat finish following multi-stage iron phosphate pretreatment.

GASKET: Closed cell gasket prevents air contaminations from entering the fixture.


INSTALLATION: Grid mounting. Flange conversion kit available in options.

WARRANTY: 5 Year Warranty.


LABEL: Fixture is certified to UL standards for Wet Location by Intertek Testing Laboratory, ISO Class 5 (Fed Std. 209E/ Class 100). This product is Made in America and complies with the Buy American Act (BAA) requirements.

DIMENSIONAL DATA

SCU22

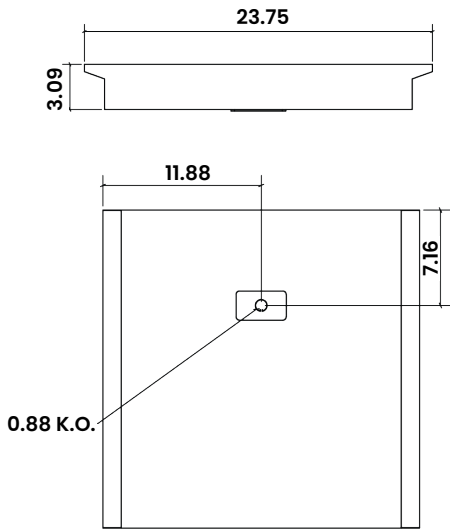

SCU24

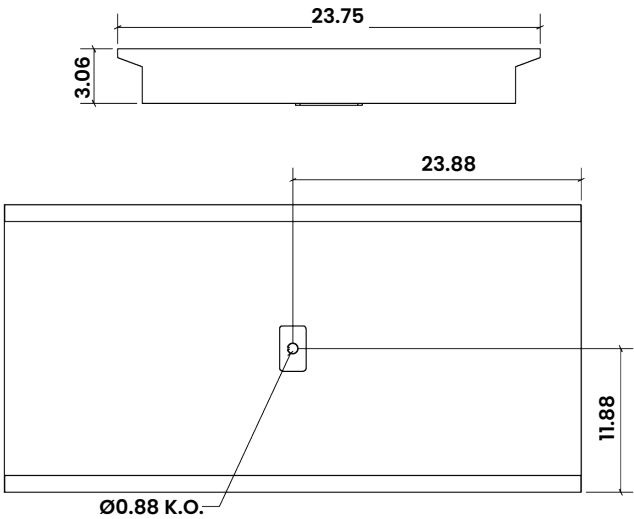

PERFORMANCE DATA*

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (W)
SCU22	L4 = Standard	4000K	5000	125	40
	L6 = High		7000	117	60
SCU24	L4 = Standard		10000	125	80
	L6 = High		12500	125	100