

STARMED™ DOS+1 SERIES



PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____



SMDOS Series

PRODUCT FEATURES

- Intended for Patient Rooms, Skilled Nursing, Examination Rooms, and more
- Multi-function 3-compartment Exam, Ambient, Reading functions, available in 2x2 and 2x4
- Recessed Grid and Flange installation
- This product was Made in America and complies with the Buy American Act (BAA), and the Build America, Buy America Act (BABAA)

ORDERING INFORMATION

Example: SMDOSG24-HC/ICA-L340-L240-RL-FA-90C-UN-DM1

SMDOS			/				
Series	Mounting G = Grid F = Flange	Size* 22 = 2x2 24 = 2x4 *Nominal Size. Dimensional Data on Page 2.	Housing HC = 20Ga. CRS Painted HP = 20Ga. SS Painted HA = 16Ga. Alum. Painted	Inset (I) Frame* blank = No Frame IC = 18Ga. CRS Painted IA = 16Ga. Alum Painted *Optional frame. Frame provides surface for easy cleaning. Must specify Frame Lens if frame is chosen. Frame increases depth of fixture to 6.25".	Frame Lens (w/ gasket)* blank = No Lens A = .125 Clear Poly. 1 = .187 Clear Poly. *If no frame is selected, no frame lens will be provided.	Ambient Lumen Output* L1 = Low L2 = Medium L3 = High *Subject to change. Performance data on Page 3. Ambient lens is a White. Poly.	Ambient Color Temp. 35 = 3500K 40 = 4000K 50 = 5000K TW1 = Tunable White 2700K to 5000K* TW2 = Tunable White 2700K to 6500K* *Available for ambient function.

Exam Lumen Output L1 = Low L2 = High	Exam Color Temp.* 35 = 3500K 40 = 4000K 50 = 5000K *Selected CCT will be the same for ambient and exam functions.	Reading Light blank = None RL = 2 LED Lights* *3000K non-dimmable swivel puck lights.	Exam Lens CA = Clear Ribbed Acrylic FA = Frosted Ribbed Acrylic	CRI 80C = 80 CRI 90C = 90 CRI	Voltage 12 = 120V 27 = 277V UN = Universal (120V-277V)
--	--	--	---	-------------------------------------	--

Driver DMI = 0-10V Dimming to 1% Tunable White Driver* TW0 = 2 CHANNEL 0-10V TWD = 2 CHANNEL DALI8 *Tunable White Driver requires choice of TW1 or TW2 in Color Temp column.	Options FZ1 = Fuse (120V) FZ2 = Fuse (277V) RF = (RIF) Radio Interference Filter AML = Antimicrobial Lens (Ambient and Exam)* LN = LED Night Light** EL1 = Emerg. Bat. LED Low (10W)*** EL2 = Emerg. Bat. LED Low (20W)*** LV3 = Dimming Low Voltage Controller**** AM = Anti-microbial finish for all room side exposed surfaces *N/A with frame. **3500K non-dimming Night Light with integrated switch allows light levels at 100%, 70%, 40% and 10%. Located in Ambient compartment. N/A with High Ambient Lumen Output (L3). ***Illuminate Ambient compartment. Integral test switch located on reflector. ****LV3 controls ambient function with dimming and on/off reading function. Exam and Night Light (if specified) are non- dimming and provided on separate line voltage circuits. N/A with emergency battery.
--	---



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

SPECIFICATIONS

HOUSING: 20-Gauge formed cold rolled steel housing seam welded and ground smooth. Stainless steel or aluminum options available. Optional inset frame secured to housing with hinge and features clear polycarbonate lens for easy cleaning.

LENS: Inner Ambient lens is .125" white polycarbonate. Exam inner lens is available in clear ribbed acrylic or white frosted ribbed acrylic (recommended). If Outer frame lens is ordered, it is clear polycarbonate. Frame lens gasket standard.

LED: Ambient and exam compartments available in three color temperatures 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Tunable White also available, from 2700K - 5000K or 2700K - 6500K. Optional reading lights are non-dimmable and 3000K. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature environment, compliant with IES LM-80 testing standards.

ELECTRICAL: 120-277VAC 50/60HZ electrical input high power factor electronic, constant current driver (<20% THD, >0.90 PF). Standard 0-10V dimming with 1-100% range for ambient lighting.

OPTIONAL TUNABLE WHITE DRIVERS:

TWO = 2 CHANNEL 0-10V one channel for brightness,
one channel for CCT

TWD = 2 CHANNEL DALI8 one channel for brightness,
one channel for CCT

LOW VOLTAGE CONTROL: The Low Voltage Control (LV3) option controls ambient function with dimming, and reading is non-dimming (on/off). The Exam and Night Light functions are on separate line voltage circuits; the nightlight LED board has (4) settings that are field selectable. The exam is typically wired to a wall switch (by others) and is dimmable. Other configurations are available – consult factory. Leads are factory labeled for field installation. Controls and any additional accessories by others.

FINISH: White polyester powder coat finish following multi-stage iron phosphate pretreatment. Optional antimicrobial finish for all room side exposed surfaces available.


INSTALLATION: Recessed Grid and Flange mounting available. Flange fixtures supplied with yokes for installation. Hardware by others.

WARRANTY: 5 Year Warranty.


LABEL: Fixture is certified Damp Location to UL standards by Intertek Testing Laboratories. This product is Made in America and complies with Buy American Act (BAA), and the Build America, Buy America Act (BABAA).

DIMENSIONAL DATA

GRID:

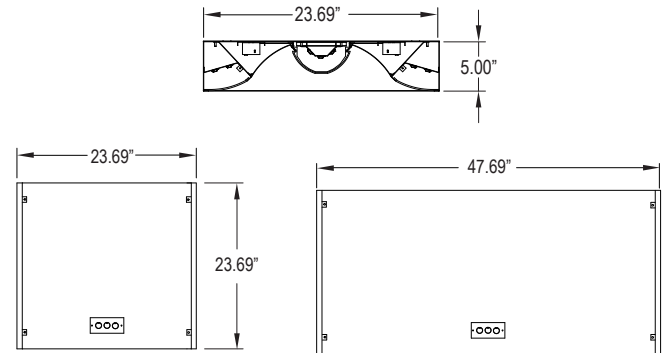

FLANGE:

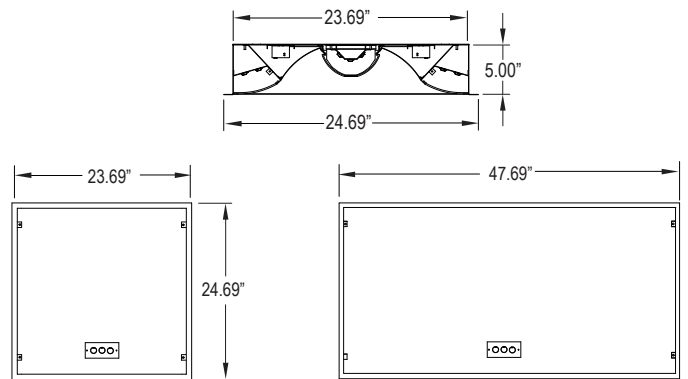

Flange Recommended Opening:

22: 24-1/16" x 23-1/8"

24: 24-1/16" x 47-1/8"



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

PERFORMANCE DATA*

*LEDs are frequently updated therefore values may change without notice.

MODEL	FUNCTION	OUTPUT	COLOR TEMP	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
SMDOS22	Ambient	L1 = Low	4000K	1265	101	12.5
		L2 = Medium	4000K	2525	101	25
		L3 = High	4000K	3790	101	37.5
	Exam	L2 = High	4000K	5500	110	50
	Reading Light	RL = 2 LED Lights	3000K	1442	103	14
SMDOS24	Ambient	L1 = Low	4000K	2525	101	25
		L2 = Medium	4000K	5050	101	50
		L3 = High	4000K	7575	101	75
	Exam	L1 = Low	4000K	5500	110	50
		L2 = High	4000K	11000	110	100
	Reading Light	RL = 2 LED Lights	3000K	1442	103	14



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.