

LUMANIQUE AMBIENT SERIES



PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Healthcare Settings, Dentist Offices, Skilled Nursing Facilities, Corridors, Waiting Rooms, and more
- Provides ambient illumination in 1x4, 2x2, and 2x4 dimensions
- Low profile, 4" depth minimizes interference with systems within ceiling plenum
- Dimensional one-piece lens provides an architectural statement
- Optional inset doorframe (IAS16) with clear overlay lens provides flat wipe-down surface for easy cleaning, Optional IP65 certified per IEC60598 and NSF2 Splash Zone/Non-Food Zone listed, CCEA approved
- Fixture is certified to UL standards by Intertek Testing laboratory for wet locations
- This product is Made in America and complies with the Buy American Act (BAA) and the Build America, Buy America Act (BABAA)



SPDA Series

ORDERING INFORMATION

Example: SPDA24-HC20-IC20/CA12-WHA-LW-40-90C-12-DM1



SPDA R		/				
Series	Mounting	Size*	Housing	Inset Frame	Doorframe Lens*	Lens
	R = Recessed (Grid/Flange)	14ST = 1x4 Standalone 22 = 2x2 24 = 2x4 *Nominal Size.	HC20 = 20Ga. CRS Painted HA16 = 16Ga. Alum Painted	IC20 = 20Ga. CRS Painted IA16 = 16Ga. Alum Painted IAS16 = 16Ga. Sealed Alum. Painted* *IAS16 is sealed with IP65 listing. Door secured with screws and a lanyard.	Blank = No Overlay Lens CA12 = .125 Clear Acrylic CP12 = .125 Clear Poly. CP060 = .060 Clear Poly. *Clear high reflective overlay provides flat wipe-down surface for easy cleaning.	WHA = White Acrylic WHL = White Linen Pattern* *Linen pattern is on the middle compartment. Edges will be White Acrylic unless other specified. See page 2 for example.

		90C				
Lumen Output*	Color Temp.	CRI	Voltage	Driver Type	Options	
LW = Low HG = High CL = Custom Lumen Output** *Subject to change. **Consult factory. Must be specified at time of quote. Must not exceed fixture maximum output. Must specify "DM1" if selecting dimming.	30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K TW1 = Tunable White 2700K to 5000K** TW1 = Tunable White 2700K to 6500K** **Available for ambient function.	90C = 90 CRI	12 = 120V 27 = 277V	DM1 = 0-10V Dimming to 1% SD2 = Step Dim. Driver (50-100%) SD3 = Step Dim. Driver (30-70-100%) Tunable White Driver*: TWD = 2-Channel 0-10V DALI8 DALI8 = 1-Channel Dali8 *Tunable White Driver requires choice of TW1 or TW2 in Color Temp column.	FZ1 = Fuse (120V) FZ2 = Fuse (277V) EQ = Earthquake Clips IP65 = Optional IP65 Rating* *Only available with IAS16. Doorframe secured with screws and a lanyard.	



New Star Lighting
2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

SPECIFICATIONS

HOUSING: 20-Gauge formed cold rolled steel housing and frame with continuous seam welds. Optional 16-gauge aluminum. Inset doorframe with latches provides tool-less access for installation and servicing. Optional Inset doorframe with aircraft cables and Phillips flat head fasteners provides IP65 Certification.

LENS: High transmittance matte white acrylic lens for maximum diffusion. Optional clear overlay lens provides flat wipe-down surface for easy cleaning (recommended for medical applications).

LED: Available in four color temperatures 3000K, 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Tunable White also available, from 2700K - 5000K or 2700K - 6500K. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature environment, compliant with IES LM-80 testing standards

ELECTRICAL: 120-277VAC or 347VAC 50/60HZ electrical input high power factor electronic, constant current driver (<20% THD, >0.90 PF). Standard 0-10V dimming with 1-100% range. Step-Dimming options available.

OPTIONAL TUNABLE WHITE DRIVERS:

DALI8- DALI Type 8 (One DALI Address)

TWD- Two Channel 0-10V dimming; one channel for brightness, one channel for CCT

FINISH: White antimicrobial polyester powder coat finish following multi-stage iron phosphate pretreatment.

INSTALLATION: Universal recessed mounting accommodates Grid and Flange installations. Luminaires will be supplied with adjustable swing arms that can be used for Flange applications or secured to the side of housing for Grid applications. Compatible with 1-1/2" and 15/16" Grid systems. Mounting for custom ceilings available, consult factory.


WARRANTY: 5 Year Warranty.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratories for Damp Location. This product was Made in America and complies with the Buy American Act (BAA) and the Build America, Buy America Act (BABAA).

DIMENSIONAL DATA*


*Dimensions are subject to change without notice. Intended for non-IC installations. Thermal protector included and extends 2 inches from housing. Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information. Average weight of the SPDA 1x4 is 38lbs. SPDA 2x2 is 30lbs. SPDA 2x4 is 50lbs.

SPDA 1x4 recommended ceiling cut-out: 10.88" x 46.88"
SPDA 2x2 recommended ceiling cut-out: 22.88" x 22.88"
SPDA 2x4 recommended ceiling cut-out: 22.88" x 46.88"

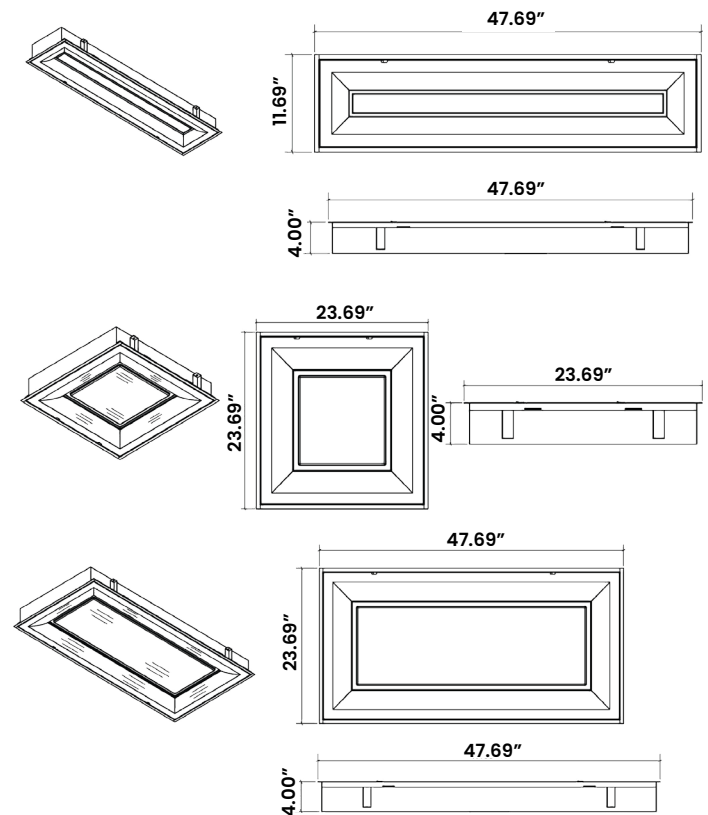

AMBIENT DECORATIVE LENS

Lens is a white matte acrylic. Optional white linen pattern over middle ambient chamber or custom pattern provided by customer. Linen pattern shown below.

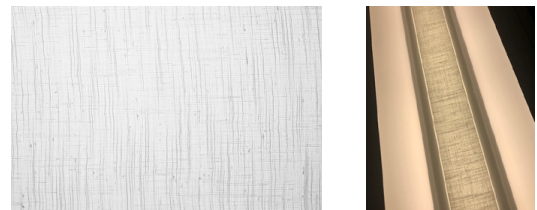

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

LUMANIQUE AMBIENT SERIES

PERFORMANCE DATA*

*LEDs are frequently updated therefore values may change without notice.

SERIES	OUTPUT	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
SPDA14ST	LW = Low	5700	95	60
	HG = High	12000	100	120
SPDA22	LW = Low	6000	100	60
	HG = High	12000	100	120
SPDA24	LW = Low	12000	100	120
	HG = High	20000	100	200

CCT MULTIPLIERS

Multipliers for relative lumen values with other series color temperatures

3000K	3500K	4000K	5000K
0.96	0.99	1.00	1.00



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.