

STARTRANS EXIT/STAIR SERIES



PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Chicago-Approved Exit and Stair sign for Transportation settings and more
- Ceiling or wall surface mount installation
- LEDs are 3.7W, 25 Year Life
- 120/277V Cold Weather driver rated for -30°C
- This product is Fixture is certified to UL standards for Wet
- Location, Made in America and complies with the Build
- America, Buy America Act (BABAA)
- The STEX Series is covered by the New Star Promise



STEX-E

ORDERING INFORMATION

Example: STEX-E-HP-SF-RA-RW-CWD



STEX	E				
Series	Power Options E = Emergency Illumination Only	Housing HP = 20Ga. SS Painted HS = 20Ga. SS Brushed	Face SF = Single Face DF = Double Face	Signage NA = Exit No Arrow SNA = Stair No Arrow DA = Exit Double Arrow SDA = Stair Double Arrow RA = Exit Right Arrow* LA = Exit Left Arrow* SRA = Stair Right Arrow* SLA = Stair Left Arrow* *Available in single face configuration only.	Lettering RW = Red Letters GW = Green Letters
CWD					
Driver CWD = Cold Weather Driver (-30°C)		Options TH = Torx® fasteners			



New Star Lighting
2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

SPECIFICATIONS

HOUSING: 20-Gauge stainless steel housing with welded corners with white powder coat finish. Single or double face configurations.

LENS: Silk screened glass panel with vandal resistant polycarbonate outer lens provides consistent, uniform illumination.

ELECTRICAL: Dual 120/277 voltage , 50/60Hz cold weather (-30C) driver standard. Energy efficient, long life LEDs. STEXC-E: Charge rate/power "ON" red LED indicator light and push to test switch for mandated code compliance testing. Maintenance-free rechargeable battery. Internal transfer switch automatically powers LEDs via internal battery for 90 minutes minimum in the event of power loss; when power is restored, battery is automatically recharged. Multi-rate charger fully recharges a depleted battery in 24 hours.


FASTENERS: Stainless steel Philips fasteners standard. Optional tamper-resistant Torx® head fasteners.

INSTALLATION: Mounting hardware provided for universal ceiling, side or back mount.

WARRANTY: Ten (10) year warranty on all electronics and housing. Battery prorated for ten years.

LABEL: Fixture is certified to UL standard for Wet Location by Intertek Testing Laboratory. Meets city of Chicago requirements CCEA. This product is a Made in America and complies with the Build America by American Act (BABAA).

DIMENSIONAL DATA

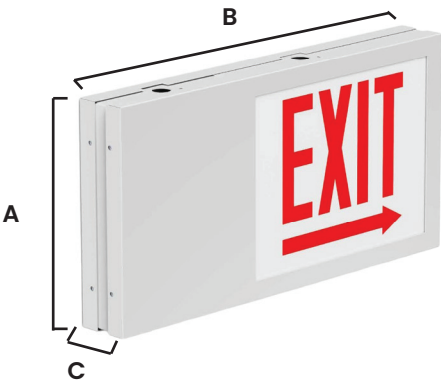

	(A) HEIGHT	(B) WIDTH	(C) DEPTH
STEX-E	10.75"	21.25"	2.75"



The STEX Series is covered by our New Star Promise when Torx® head fasteners are selected.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.



New Star Lighting
2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.