

STARTRANS STAIRWELL SERIES: QUICK SHIP

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Corridors, Stairways, Restrooms, Lobbies, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Surface mount linear fixture available in 2ft
- Cold rolled steel low-profile housing
- Frosted polycarbonate lens for even light distribution
- Integral sensor option available
- The Stairwell Series is covered by the New Star Promise



STWL Quick Ship Series

ORDERING INFORMATION

Example: STWL2-T-L227-80C-UN-QS



STWL 2		T	CCT	
Series	Nominal Size 2 = 2ft *Nominal size. Dimensional Data on Page 2.	Style	Lumen Output* L2 = Standard *Subject to change. Performance Data on Page 3.	Field-Selectable CCT 3500K - 5000K
80C	UN			QS
CRI 80C = 80 CRI	Voltage UN = Universal (120V-277V)	Options PH = Phillips Head Screw	Quick Ship QS = Quick Ship *Required for Emergency Battery.	

STARTRANS STAIRWELL SERIES: QUICK SHIP New Star Lighting

SPECIFICATIONS

CONSTRUCTION: 22-Gauge cold rolled steel internally reinforced housing.

LENS: .10" Linear frosted UV-stabilized polycarbonate lens for even light distribution.

LED: Available in select color temperatures: 2700K and 3500K with maximum 3-step MacAdam variation allowance. Minimum 80 CRI standard. Minimum 50,000 hours with 70% lumen maintenance in a 25°C temperature ambient environment, compliant with IES LM-80 testing standards.

ELECTRICAL: 120-347VAC 50/60Hz, constant current 0-10V driver, 1200mA Current Output, 82CRI. (<20% THD, >0.9 PF). Wattage selectable: 40W/50W/56W.

REFLECTOR: 22-Gauge cold rolled steel in high reflective white finish.

FASTENERS: Tamper resistant Torx® head screws with center pin reject. Optional Phillips screws available. Raw unpainted fastener finish.



FINISH: White polyester powder coat finish following multistage iron phosphate pretreatment.

INSTALLATION: Surface wall mount installation. J-Box and hardware by others.

WARRANTY: New Star Promise.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory for Damp Locations.

DIMENSIONAL DATA

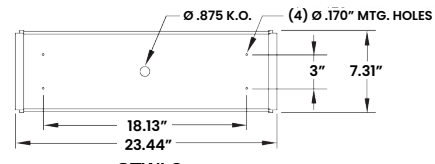

The StairWell Quick Ship Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

STARTRANS STAIRWELL SERIES: QUICK SHIP

PERFORMANCE DATA

*LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (W)
STWL2	L2 =Standard	4000K	1500	100	15