

VICTORY® NARROW SERIES: QUICK SHIP NewStarLighting

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Public Areas, Corridors, Stairways, Parking Garages, Restrooms, Lobbies, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Architectural linear luminaire that melds aesthetics, function and vandal resistance
- Extruded aluminum housing with cast aluminum endcaps for durability
- Fixture is certified to UL Standards by Intertek Testing Laboratory for Wet Locations (under covered ceilings), IK10 listed per IEC60068-2-75
- This product complies with the Buy American Act



VICN Quick Ship Series

Registration No. 7,933,706

ORDERING INFORMATION

Example: VIC2N-L235-90C-1C-RW-UN-WH



VIC		N					RW
Series	Nominal Size 2 = 2ft 4 = 4ft *Nominal size. Dimensional data on Page 2.	Style N = Narrow	Lumen Output* L1 = Low L2 = Standard L3 = High *Subject to change. Performance Data on Page 3.	Color Temp. 35 = 3500K 40 = 4000K 50 = 5000K	CRI 80C = 80 CRI 90C = 90 CRI	Circuits 1C = 1 Circuit 2C = 2 Circuits* *Allows for inboard/outboard control	Lens RW = .09 Ribbed White Poly.

	WH		QS
Voltage 12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	Finish WH = White	Options SD2 = Step. Dimming Driver (50-100%) SD3 = Step. Dimming Driver (30-70-100%) PH = Phillips Head Screws PM = Pendant Mount Install 3G = 3G Vibration Rated Design	QS = Quick Ship



New Star Lighting
2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

VICTORY® NARROW SERIES: QUICK SHIP New Star Lighting

SPECIFICATIONS

CONSTRUCTION: Marine grade, extruded aluminum frame with cast aluminum end caps. Includes knockouts for surface conduit and tandem mounting (field installation, hardware by others).

LENS: White polycarbonate lens. Unique swing rail design for ease of lens removal for maintenance.

LED: Available in three color temperatures 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Minimum 80 CRI standard.

ELECTRICAL: 0-10V Dimming available with 1-100% range.

REFLECTOR: Faceted 22-gauge specular aluminum for maximum rigidity and controlled light distribution.

FASTENERS: Tamper-resistant Torx® head fasteners with center pin reject. Optional Phillips screws (3 on each side) available.

FINISH: White powder coat finish following multistage iron phosphate pretreatment.

GASKET: EPDM gasketing to prevent water and dust infiltration.


INSTALLATION: Surface wall mount installation. Hardware by others.

WARRANTY: New Star Promise.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory for Wet Location (under covered ceiling). Optional 3G rating.

DIMENSIONAL DATA

Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information. Average weight of the VIC2N is 10lb. Average weight of the VIC4N is 15lb.

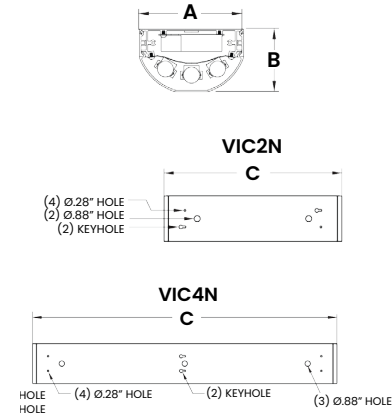

	A	B	C
VIC2N	6.50"	3.92"	25.50"
VIC4N	6.50"	3.92"	49.50"



The Victory Narrow Quick Ship Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

VICTORY® NARROW SERIES: QUICK SHIP NewStarLighting

PERFORMANCE DATA

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (w)
VIC2N	LOW (L1)	3500K	1100	85	13
		4000K	1200	92	13
		5000K	1300	100	13
	STANDARD (L2)	3500K	2100	84	25
		4000K	2300	92	25
		5000K	2500	100	25
	HIGH (L3)	3500K	3200	84	38
		4000K	3700	97	38
		5000K	4000	105	38
VIC4N	LOW (L1)	3500K	2700	108	25
		4000K	2800	112	25
		5000K	2900	116	25
	STANDARD (L2)	3500K	5400	108	50
		4000K	5600	112	50
		5000K	5800	116	50
	HIGH (L3)	3500K	7200	96	75
		4000K	8100	108	75
		5000K	8600	115	75



New Star Lighting
2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.