

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Public Areas, Corridors, Stairways, Parking Garages, Restrooms, Lobbies, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options.
- Architectural linear luminaire that melds aesthetics, function and vandal resistance
- Extruded aluminum housing with cast aluminum endcaps for durability
- Fixture is certified to UL standards by Intertek Testing Laboratory for Wet Location, IK10 Listed per IEC60068
- This product is Made in America and complies with the Buy American Act (BAA)
- The Victory Series is covered by the New Star Promise



VIC Wide Quick Ship Series

Registration No. 7,933,706



ORDERING INFORMATION

Example: VIC2W-L235-90C-1C-RW-WH-UN-QS

VIC		W						RW
Series	Nominal Size*	Style	End Caps	Lumen Output*	Color Temp.	CRI	Circuits	Lens
	2 = 2ft 4 = 4ft	W = Wide	blank = Flat End Cap	L1 = Low L2 = Standard L3 = Medium L4 = High	35 = 3500K 40 = 4000K 50 = 5000K AMB = Amber	80C = 80 CRI 90C = 90 CRI	1C = 1 Circuit 2C = 2 Circuits*	RW = .09 Ribbed White Poly.
	*Nominal size. Dimensional data on Page 2.			*Subject to change. Performance Data on Page 3.			*Allows for inboard/outboard control	

WH				QS
Finish WH = White	Voltage 12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	Driver DM = 0-10V dimming with 10-100% range DM1 = 0-10V dimming with 1-100% range SD2 = Step. Dimming Driver (50-100%) SD3 = Step. Dimming Driver (30-70-100%)	Options WP = 6ft. Flex Whip. Supply wires included only unless otherwise specified PH = Phillips Head Screws PM = Pendant Mount Install (Stems/Hardware by others)	Quick Ship QS = Quick Ship

SPECIFICATIONS

CONSTRUCTION: Marine grade, extruded aluminum frame with flat die cast aluminum end caps. Includes knockouts for surface conduit and tandem mounting (field installation, hardware by others).

LENS: White polycarbonate lens. Unique swing rail design for ease of lens removal for maintenance.

LED: Available in three color temperatures: 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature, compliant with IES LM-80 testing standards.

ELECTRICAL: 120-277VAC and 347VAC 50/60Hz constant current driver. 0-10V dimming available with either 10-100% range or 1-100% range. Must specify dimming under options.

REFLECTOR: Faceted 22-gauge specular aluminum for maximum rigidity and controlled light distribution.

FASTENERS: Tamper-resistant Torx® head fasteners with center pin reject. Optional Phillips screws available..

FINISH: White polyester powder coat finish following multistage iron phosphate pretreatment.




GASKET: EPDM gasketing to prevent water and dust infiltration.

INSTALLATION: Surface wall mount installation. Hardware by others.

WARRANTY: New Star Promise.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory for Wet Location. IK10 Listed per IEC60068. This product is Made in America and complies with the Buy American Act (BAA).

DIMENSIONAL DATA

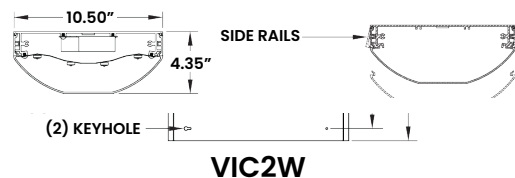

STANDARD (FLAT) END CAP



The Victory Wide Quick Ship Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant or chiteturall luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

PERFORMANCE DATA

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

			(RC) CLEAR POLYCARBONATE LENS		
MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (w)
VIC2W	LOW (L1)	3500K	1300	100	13
		4000K	1350	104	13
		5000K	1400	108	13
	STANDARD (L2)	3500K	2500	100	25
		4000K	2600	104	25
		5000K	2700	108	25
	MEDIUM (L3)	3500K	3700	97	38
		4000K	3900	103	38
		5000K	4100	108	38
	HIGH (L4)	3500K	4900	98	50
		4000K	5100	102	50
		5000K	5300	106	50
VIC4W	LOW (L1)	3500K	2400	96	25
		4000K	2550	102	25
		5000K	2700	108	25
	STANDARD (L2)	3500K	4900	92	50
		4000K	5100	102	50
		5000K	5300	106	50
	MEDIUM (L3)	3500K	7400	99	75
		4000K	7700	703	75
		5000K	8000	107	75
	HIGH (L4)	3500K	9700	97	100
		4000K	10200	102	100
		5000K	10700	107	100



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.