

# XP TRI-PROOF SERIES

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_



XP Series

## PRODUCT FEATURES

- Intended for Commercial Settings, Schools, Warehouses, Offices, Transportation Settings, and more
- -20°C and 45°C operating temperature
- Delivers 5600lm at 40W

## ORDERING INFORMATION

EXAMPLE: XP-PL3040-CS



Part numbers shown are subject to available inventory.

### SILVER FINISH

XP-PL3040	CS
Series	Power CS = Power Cable on side of fixture

### SILVER FINISH & DIMMING

XP-PL3040	CB	DM
Series	Power CB = Power Cable centered on back of fixture	Dimming DM = 0-10V dimming with 10-100% range

### WHITE FINISH & DIMMING

XP-PL3040	CS	DM	WH
Series	Power CS = Power Cable centered on side of fixture	Dimming DM = 0-10V dimming with 10-100% range	Finish WH = White Finish



**New Star Lighting**  
 2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

## SPECIFICATIONS

**HOUSING:** Slim, anti-corrosion PVC housing. No internal access required. Silver or white finish standard.

**LENS:** Frosted Acrylic lens for maximum light uniformity.

**LED:** 4000K standard with maximum 3-step MacAdam variation allowance.

**ELECTRICAL:** Universal driver (120V-277V). 5600 lumen output (40W).


**GASKET:** High-density silicone rubber sealing ring protection to prevent light leaks.

**INSTALLATION:** Surface or Suspended installation (supplied by others) with stainless steel mounting clips.

**WARRANTY:** New Star Promise.


**LABEL:** Fixture is certified to UL standards for Wet Locations. IP65 Rated per IEC60598.

## DIMENSIONAL DATA

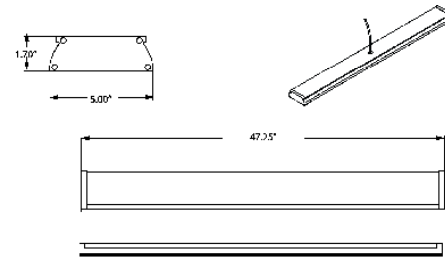



### SURFACE INSTALLATION

1. Drill 8mm cutting holes, put plastic plug and lock the clips on the ceiling with self-tapping screws.
2. Put the lamp into the clips properly.
3. Connect the power.



### SUSPENDED INSTALLATION

1. Drill 8mm cutting holes, put plastic plug and lock the clips on the ceiling with self-tapping screws (supplied by others).
2. Suspend lamp with aircraft cable or tern (supplied by others) and then connect to the power.



The XP TriProof Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaries when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse\*.

\*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.