


PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

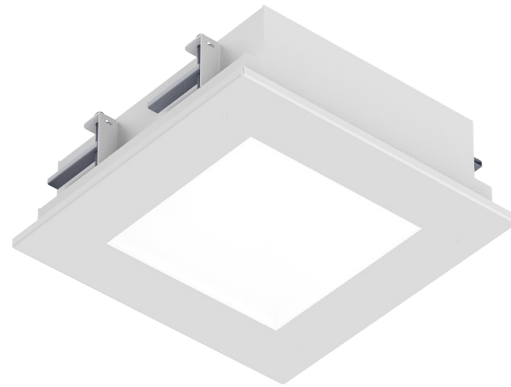

57M Series

PRODUCT FEATURES

- Ligature-resistant features to support Behavioral Health applications
- Die formed, seam welded, and ground smooth cold rolled steel or stainless steel housing
- Tamper-resistant Torx® fasteners with center pin reject
- Antimicrobial polyester powder coat following a multistage iron phosphate pre-treatment.
- Fixture is certified to UL Standards by Intertek Testing Laboratory for Wet Locations, covered ceiling mount only. IK10 Listed per IEC60068-2-75
- This product is Made in America and complies with the Buy American Act (BAA), and the Build America, Buy America Act (BABAA)
- The DuraCare™ 57M is covered by the New Star Promise

ORDERING INFORMATION

Example: 57M11-DC-B/B-L140-90C-1C-A/A-UN

57M	11	DC	/				
Series	Nominal Size 11 = 1 x 1 ✓	DC = DuraCare™	Housing B = 14Ga. CRS Painted C = 16Ga. CRS Painted ✓ D = 18Ga. CRS Painted E = 14Ga. SS Mill Finish F = 16Ga. SS Mill Finish G = 18Ga. SS Mill Finish H = 14Ga. SS Painted J = 16Ga. SS Painted K = 18Ga. SS Painted	Frame A = 12Ga. CRS Painted B = 14Ga. CRS Painted C = 16Ga. CRS Painted ✓ E = 14Ga. SS Brushed F = 16Ga. SS Brushed H = 14Ga. SS Painted J = 16Ga. SS Painted	Lumen Output* L1 = Standard L2 = High	Color Temp. 35 = 3500K 40 = 4000K 50 = 5000K	CRI 80C = 80 CRI 90C = 90 CRI
*Nominal Size. Dimensional Data on page 2.							
*Subject to change. Performance Data on Page 2.							

1C	/				
Circuits 1C = 1 Circuit	Outer Lens 0 = No Lens A = .125 Clear Poly. B = .156 Clear Poly. 1 = .187 Clear Poly. 2 = .250 Clear Poly. ✓ 3 = .375 Clear Poly. 4 = .500 Clear Poly. 5 = .187 Clear Temp Glass 6 = .250 Clear Temp Glass 7 = .375 Clear Temp Glass* 8 = .500 Clear Temp Glass* 9 = .750 Clear Temp Glass* *Must use with 12Ga. or 14Ga. Frame	Inner Lens A = .125 Prismatic Acrylic B = .125 Prismatic Poly. ✓ C = .156 Prismatic Poly. D = .187 Prismatic Poly. F = .156 Prismatic Acrylic G = .140 DR Acrylic* LC3 = .125 White Frosted Poly. *Not rated for Wet Locations.	Voltage 12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	Driver DM = 0-10V dimming with 10-100% range DM1 = 0-10V dimming with 1-100% range	Options FZ1 = Fuse (120V)* FZ2 = Fuse (277V)* LN = LED Night Light** EL1 = Emerg. Bat. LED Low (Remote)*** UV = .005 UV Absorbing Overlay AH = Allen Head Screws with Center Pin Reject *Cannot use with UN voltage. **Integrated switch allows light levels at 100%, 70%, 40% and 10%. ***If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.

✓ Indicates the product configuration meets the published guidelines by the State of New York for behavioral health applications. Find out more by visiting the [New York State Office of Mental Health's website](#).

SPECIFICATIONS

HOUSING: Die formed, seam welded, and ground smooth cold rolled steel or stainless steel housing. Incorporates a removable reflector unitized with all electrical components for easy installation and maintenance.

FRAME: Die formed one-piece frame with tightly closed corners (material and gauge to match housing).

HINGE: Concealed internal 16-gauge drop hinge.

LENS: Outer and inner lens options secured with "Z" retainers with welded studs six inches apart for maximum strength.

LED: Available in three color temperatures 3500K, 4000K, and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 80 CRI standard. 0-10V dimming available with 10-100% range and 1-100% range. Must specify dimming under options.

FASTENERS: Tamper-resistant Torx® head fasteners with center pin reject.

FINISH: Antimicrobial white polyester powder coat finish on exposed surfaces following multistage iron phosphate pre-treatment.


GASKET: Black neoprene gasket around door frame to prevent light leaks.

INSTALLATION: Easy Flange installation with adjustable 90° swing arm system. Hardware by others.

WARRANTY: Five (5) year warranty.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory for Wet Locations, covered ceiling mount only. IK10 Listed per IEC60068-2-75.

DIMENSIONAL DATA

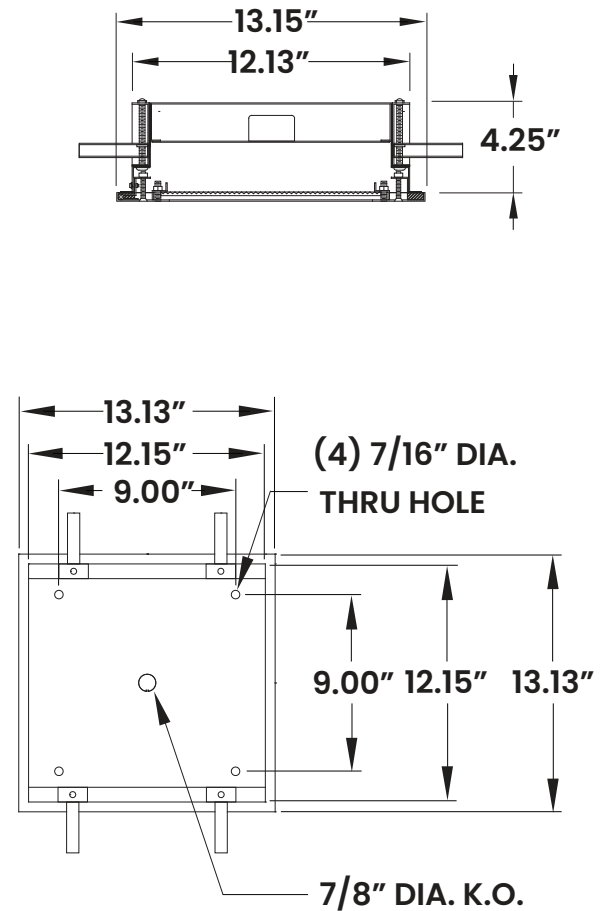

CEILING CUT-OUT: 12-3/8" x 12-3/8"



The DuraCare™ 57M LED Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

PERFORMANCE DATA

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
57M11	L1 = Standard	3500K	1438	115	12.5
		4000K	1500	120	12.5
		5000K	1562	125	12.5
	L2 = High	3500K	2090	105	20
		4000K	2185	109	20
		5000K	2280	114	20

