

CLEANROOM EXIT SURFACE SERIES



PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Intended for Cleanrooms, Hospitals, Hi-Tech Manufacturing, Laboratories, Food Processing Facilities, Commercial Kitchens, and more
- Ceiling or wall surface mount installation
- Red or green legend, optional single or double face
- Fixture is certified to UL standards by Intertek Testing Laboratory, UL924 Listed, and meets or exceeds NFPA 101 Life Safety Code. IP65 rated per IEC60598. ISO Class 4 (Fed Std. 209E/ Class 10)
- This product is Made in America and complies with the Buy American Act (BAA), and the Build America, Buy America Act (BABAA)



ESCS Series



ORDERING INFORMATION

Example: ESCS-HC/IC-SF-LED-90C-UN-RW

ESC		S		/			
Series	Mounting S = Surface	Housing HC = 20Ga. CRS Painted HS = 20Ga. SS Brushed	Inset Frame IC = 20Ga. CRS Painted IB = 20Ga. SS Brushed	Face SF = Single Face DF = Double Face	Lamp Type LED = LED Module		

Voltage 12 = 120V 27 = 277V UN = Universal (120V-277V)	Lettering RW = Red Letters GW = Green Letters	Options EM = Emergency Battery* TH = Tamper-resistant Torx® fasteners with center pin reject *If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.
--	--	---



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

SPECIFICATIONS

CONSTRUCTION: 20-Gauge formed cold rolled steel or brushed stainless steel housing with continuous seam welds.

FRAME: Inset doorframe in 20-gauge cold rolled steel or 20-gauge brushed stainless steel.

LENS: .125 clear polycarbonate lens.

ELECTRICAL: Long life LED system illuminates Red or Green legend. Optional single face or double face. 7W.

FASTENERS: Stainless steel Phillips flathead fasteners with captive cage nuts. Finish to match doorframe.

LEGENDS: Legend illuminated by internal high output LEDs. Lettering 6" high with .750" stroke. Polycarbonate red or green letters against white translucent background panel. Field selectable chevron inserts.

FINISH: White antimicrobial polyester powder coat finish following multi-stage iron phosphate pre-treatment. Stainless steel housing and overlapping frame will be left unpainted if specified.




GASKET: Closed cell EPDM and closed cell silicone gaskets prevent air contaminants from entering the fixture.

INSTALLATION: Ceiling or wall surface mount installation.



WARRANTY: Limited five (5) year warranty.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory, UL924 Listed, and meets or exceeds NFPA 101 Life Safety Code. IP65 rated per IEC60598. ISO Class 4 (Fed Std. 209E/ Class 10), UL924. This product is Made in America and complies with the Buy American Act (BAA), and the Build America, Buy American Act (BABAA).

DIMENSIONAL DATA

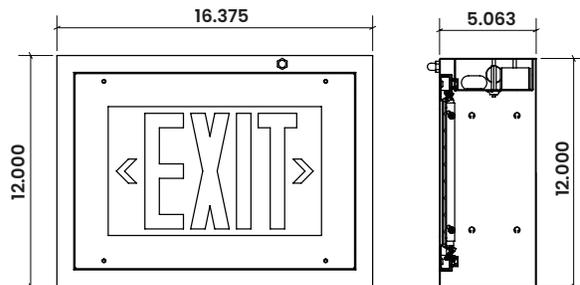

DOUBLE FACE

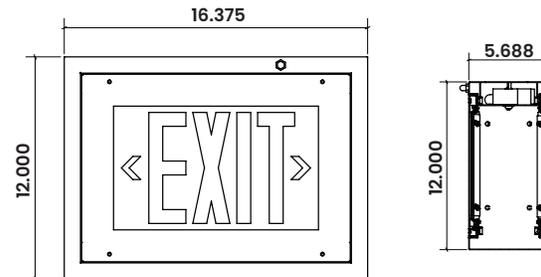

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.