

GATEWAY™ WALL PACK SERIES: QUICK SHIP

PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Intended for Public Areas, Building Facades, Corridors, Stairways, Transportation Settings, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options.
- Available in small and medium sizes with Type 3 optics
- Tamper-resistant Torx® fasteners with center pin reject
- Fixture is certified to UL standards for Wet Location. IK10 Listed per IEC60068. IP65 certified per IEC60589.
- This product complies with the Buy American Act (BAA) when specifying BAA option
- The GEWP Series is covered by the New Star Promise



GEWP Series



ORDERING INFORMATION

Example: GEWP-SM-LW40-80C-CG-T3-UN-BZ-QS

GEWP	40		80C	CG	
Series	Size-Lumen Output* Small (6.4" wide) SM-LW = 11W/1500L SM-MD = 15W/2000L SM-HG = 21W/2700L SM-CL = Custom Lumen Output**		Color Temp. 40 = 4000K	CRI 80C = 80 CRI	Lens CG = Clear Glass
	Medium (11.88" wide) MD-LW = 44W/5500L MD-MD = 61W/7500L MD-HG = 78W/10000L MD-CL = Custom Lumen Output**				
	*See pg. 3 for Performance Data **Must be specified at time of quote. Must not exceed fixture maximum output.				

T3	UN	BZ		QS
Optics T3 = Type 3	Voltage UN = Universal (120V-277V)	Finish BZ = Bronze	Options EM = Emergency Battery* OC = Occupancy Sensor Sensor* PC = Photocell Sensor (button style)* EMCT = Cold Weather Emergency Battery (10W) DD = Dual Driver** BAA = Buy American Act L90 = Optical Module Rotated 90° Left R90 = Optical Module Rotated 90° Right *N/A with GEWP-SM. **Available for MD only. Not Available with EM or EMCT	Quick Ship QS = Quick Ship

SPECIFICATIONS

CONSTRUCTION: Die-cast aluminum frame and housing with integral heat sink. Designed with the light engine recessed into the luminaire; delivers enhanced visual comfort, excellent distribution, and consistent uniformity while maintaining ideal spacing in wall-mount installations. Flush, clear impact resistant glass provides IK10 impact protection.

LED: Available 4000K with maximum 3-step MacAdam variation allowance. Minimum 60,000h with 85% of lumen maintenance in 35°C ambient temperature, per IES TM-21 testing report.

ELECTRICAL: 120-277VAC 50/60Hz driver with dimming from 100%-1%. Optional motion sensor or photo cell control.

OPTIONAL SENSOR (Size MD Only): PIR Motion sensor, 5-12VDC, maximum power consumption 0.5 Watts in stand-by mode. Operation temp -30°C - 50°C. Auto mode function: At dusk, light will turn on to 40% brightness. When motion is detected, the light will turn to high-level brightness (100%) and remain on if further motion is detected. It will revert to low level brightness about 120 seconds after motion is no longer detected.

FASTENERS: Torx® head fasteners with center pin reject.

FINISH: Durable powder coat finish available in black, bronze, or matte white following multi-stage iron phosphate pretreatment.

INSTALLATION: Surface mount installation with a universal back mounting plate, compatible with single or double-gang J-box.

WARRANTY: New Star Promise.

LABEL: Fixture is certified to UL standards for Wet Location. IK10 Listed per IEC60068. IP65 certified per IEC60589. Operable in -40°C to 25°C ambient temperatures. Product tested and compliant in environments up to 35°C. This product complies with the Buy American Act (BAA) when BAA option is specified.



The Gateway Wall Pack Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.




New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

DIMENSIONAL DATA

Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information.

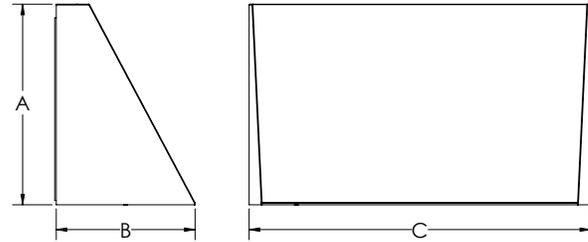


	HEIGHT (A)	DEPTH (B)	WIDTH (C)
GEWP-SM	5.60"	4.40"	6.40"
GEWP-MD	9.80"	6.88"	11.88"


OPTIONAL SENSOR RANGE

GEWP OCCUPANCY SENSOR RANGE REPORT

TOP VIEW MAX SENSOR COVERAGE:

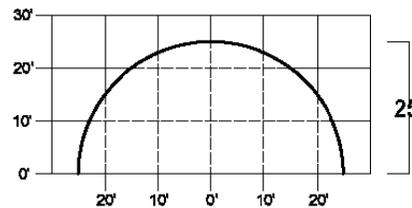

SIDE VIEW MAX SENSOR COVERAGE:





Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

PERFORMANCE DATA/PHOTOMETRIC CURVES

*Data is with 80 CRI chip and 40k Color. LEDs are frequently updated therefore values may change without notice.

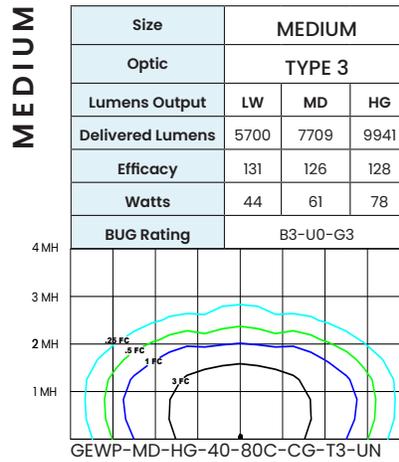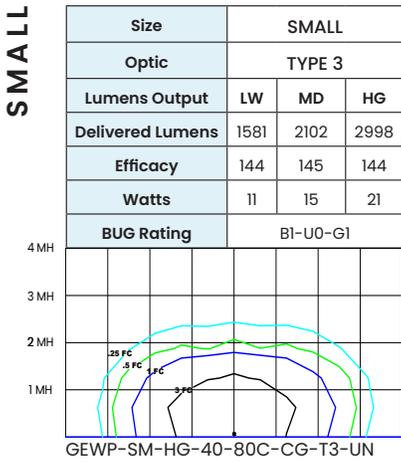

CCT	2700K	3000K	4000K	5000K
MULTIPLIER	0.92	0.96	1.0	1.0



New Star Lighting
 2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.
 © 2026, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.