

# GATEWAY™ WALL PACK SERIES: QUICK SHIP New Star Lighting

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_

## PRODUCT FEATURES

- Intended for Public Areas, Building Facades, Corridors, Stairways, Transportation Settings, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options.
- Available in small and medium sizes with Type 3 optics
- Tamper-resistant Torx® fasteners with center pin reject
- Fixture is certified to UL standards for Wet Location. IK10 Listed per IEC60068. IP65 certified per IEC60589.
- This product complies with the Buy American Act (BAA) when specifying BAA option
- The GEWP Series is covered by the New Star Promise



GEWP Series



## ORDERING INFORMATION

Example: GEWP-SM-LW40-80C-CG-T3-UN-BZ-QS

GEWP	40		80C	CG	
Series	<div>Size-Lumen Output*</div> <div>Small (6.4" wide)</div> <div>SM-LW = 11W/1500L</div> <div>SM-MD = 15W/2000L</div> <div>SM-HG = 21W/2700L</div> <div>SM-CL = Custom Lumen Output**</div> <div>*See pg. 3 for Performance Data</div> <div>**Must be specified at time of quote. Must not exceed fixture maximum output.</div>	<div>Medium (11.88" wide)</div> <div>MD-LW = 44W/5500L</div> <div>MD-MD = 61W/7500L</div> <div>MD-HG = 78W/10000L</div> <div>MD-CL = Custom Lumen Output**</div>	<div>Color Temp.</div> <div>40 = 4000K</div>	<div>CRI</div> <div>80C = 80 CRI</div>	<div>Lens</div> <div>CG = Clear Glass</div>

T3	UN	BZ		QS
<b>Optics</b> T3 = Type 3	<b>Voltage</b> UN = Universal (120V-277V)	<b>Finish</b> BZ = Bronze	<b>Options</b> EM = Emergency Battery* OC = Occupancy Sensor Sensor* PC = Photocell Sensor (button style)* EMCT = Cold Weather Emergency Battery DD = Dual Driver** BAA = Buy American Act L90 = Optical Module Rotated 90° Left R90 = Optical Module Rotated 90° Right  *N/A with GEWP-SM. **Available for MD only. Not Available with EM or EMCT	<b>Quick Ship</b> QS = Quick Ship



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
[www.newstarlighting.com](http://www.newstarlighting.com)

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.  
 © 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

# GATEWAY™ WALL PACK SERIES: QUICK SHIP New Star Lighting

## SPECIFICATIONS

**CONSTRUCTION:** Die-cast aluminum frame and housing with integral heat sink. Designed with the light engine recessed into the luminaire; delivers enhanced visual comfort, excellent distribution, and consistent uniformity while maintaining ideal spacing in wall-mount installations. Flush, clear Impact resistant glass provides IK10 impact protection.

**LED:** Available 4000K with maximum 3-step MacAdam variation allowance. Minimum 60,000h with 85% of lumen maintenance in 35°C ambient temperature, per IES TM-21 testing report.

**ELECTRICAL:** 120-277VAC 50/60Hz driver with dimming from 100%-1%. Optional motion sensor or photo cell control.

**OPTIONAL SENSOR (Size MD Only):** PIR Motion sensor, 5~12VDC, maximum power consumption 0.5 Watts in stand-by mode. Operation temp -30°C - 50°C. Auto mode function: At dusk, light will turn on to 40% brightness. When motion is detected, the light will turn to high-level brightness (100%) and remain on if further motion is detected. It will revert to low level brightness about 120 seconds after motion is no longer detected.

**FASTENERS:** Torx® head fasteners with center pin reject.

**FINISH:** Durable powder coat finish available in black, bronze, or matte white following multi-stage iron phosphate pretreatment.


**INSTALLATION:** Surface mount installation with a universal back mounting plate, compatible with single or double-gang J-box.

**WARRANTY:** New Star Promise.

**LABEL:** Fixture is certified to UL standards for Wet Location. IK10 Listed per IEC60068. IP65 certified per IEC60589. Operable in -40°C to 25°C ambient temperatures. Product tested and compliant in environments up to 35°C. This product complies with the Buy American Act (BAA) when BAA option is specified.

## DIMENSIONAL DATA

Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information.

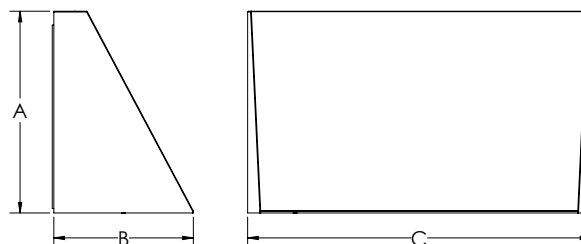


	HEIGHT (A)	DEPTH (B)	WIDTH (C)
GEWP-SM	5.60"	4.40"	6.40"
GEWP-MD	9.80"	6.88"	11.88"


## OPTIONAL SENSOR RANGE

### GEWP OCCUPANCY SENSOR RANGE REPORT

TOP VIEW MAX SENSOR COVERAGE:

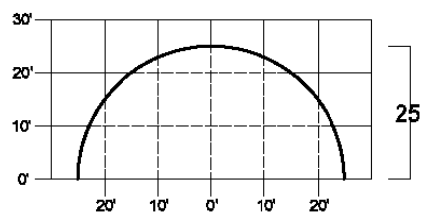

SIDE VIEW MAX SENSOR COVERAGE :



The Gateway Wall Pack Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse\*.

\*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.





**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.  
© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

PERFORMANCE DATA/PHOTOMETRIC CURVES

\*Data is with 80 CRI chip and 40k Color. LEDs are frequently updated therefore values may change without notice.

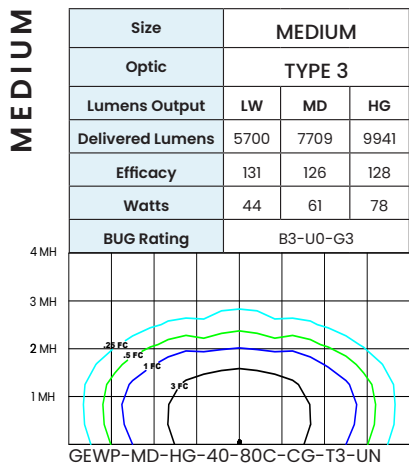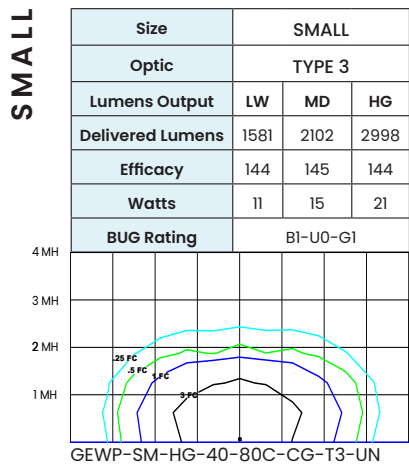

CCT	2700K	3000K	4000K	5000K
MULTIPLIER	0.92	0.96	1.0	1.0