

PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Intended for vandal-prone applications including Public Areas, Corridors, Stairways, Parking Garages, Restrooms, Lobbies, Schools, and more.
- Available in three field-selectable lumen outputs (Low, Medium, High) and color temperatures (3000K, 4000K, and 5000K)
- 1-10V dimming standard
- Tamper resistant Torx® head screws
- Fixture is certified to UL standards. IP65 rating.
- The OST Series is covered by the New Star Promise



OST Series

ORDERING INFORMATION

Example: OSTS10-LMS-CCT-UN-BK

| OST | | LMS | CCT | | |
|--------|--|--|---|---|--|
| Series | Style S = Semi Cover F = Full Cover | Size* 10" = 10" Wide 15" = 15" Wide *Nominal size. | Selectable Lumen Output LMS = Low, Medium, High Lumen Output | Selectable Color Temp. CCT = 3000K, 4000K, 5000K | Voltage 34 = 347V UN = 120-277V |



SPECIFICATIONS

CONSTRUCTION: Die-cast aluminum housing. Available in a full or semi cover housing.

LED: Available in three field-selectable lumen outputs (Low, Medium, High) and color temperatures (3000K, 4000K, and 5000K).

ELECTRICAL: 1-10V dimming standard.

FINISH: Durable textured architectural bronze powder coat finish standard. Optional white or black finish available.

FASTENERS: Tamper resistant Torx® head screws.

INSTALLATION: Surface mount (hardware by others)

LABEL: Fixture is certified to UL standards. IP65 rating.




The OST Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaries when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.


*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.

DIMENSIONAL DATA

OSTS

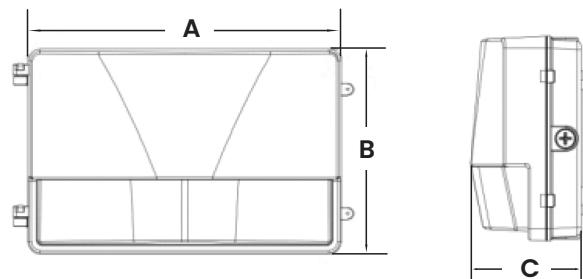

OSTF

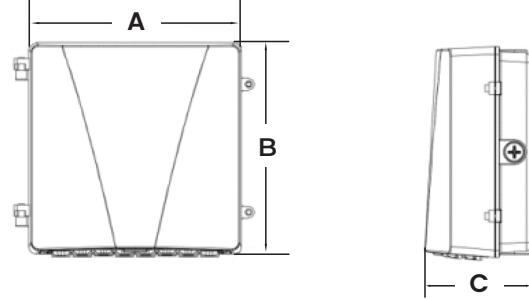

| | A | B | C |
|---------------|--------|-------|-------|
| OSTS10 | 10.23" | 9.09" | 4.33" |
| OSTS15 | 14.96" | 9.09" | 5.12" |
| OSTF10 | 10.23" | 9.09" | 4.41" |
| OSTF15 | 14.96" | 9.09" | 6.14" |

PERFORMANCE DATA

| MODEL | OUTPUT | LUMENS DELIVERED | EFFICACY (lm/w) | INPUT POWER (W) |
|--------|--------------------|------------------|-----------------|-----------------|
| OSTS10 | LW = Low | 2340 | 130 | 18 |
| | MD = Medium | 3120 | 130 | 24 |
| | HG = High | 3900 | 130 | 30 |
| OSTS15 | LW = Low | 5490 | 130 | 42 |
| | MD = Medium | 7280 | 130 | 56 |
| | HG = High | 9100 | 130 | 70 |
| OSTF10 | LW = Low | 1875 | 125 | 15 |
| | MD = Medium | 2500 | 125 | 20 |
| | HG = High | 3125 | 125 | 25 |
| OSTF15 | LW = Low | 4125 | 125 | 33 |
| | MD = Medium | 5500 | 125 | 44 |
| | HG = High | 6875 | 125 | 55 |



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.