

INSTALLATION INSTRUCTIONS




Fixture Family: HIGH ABUSE LINEAR SERIES

Description: HAL - RECESSED MUD-IN FLANGE INSTALLATION INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS

- This product must be installed in accordance with all applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.
- Disconnect power before beginning installation.
- Fixture must be installed in compliance with the National Electric Code and any local codes.
- To be installed only by a qualified electrician.
- Proper grounding is required to ensure personal safety.
- Read all fixture markings and labels to ensure correct installation of fixture.
- Risk of fire, use minimum of 90C supply connectors.
- These instructions may not cover all details or variations. If additional information is needed, please contact New Star Lighting.

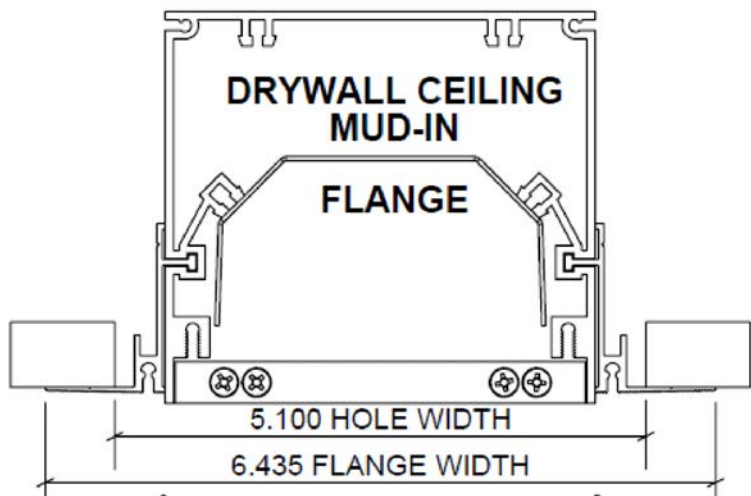

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure, or process. Specifications and dimensions are subject to change.

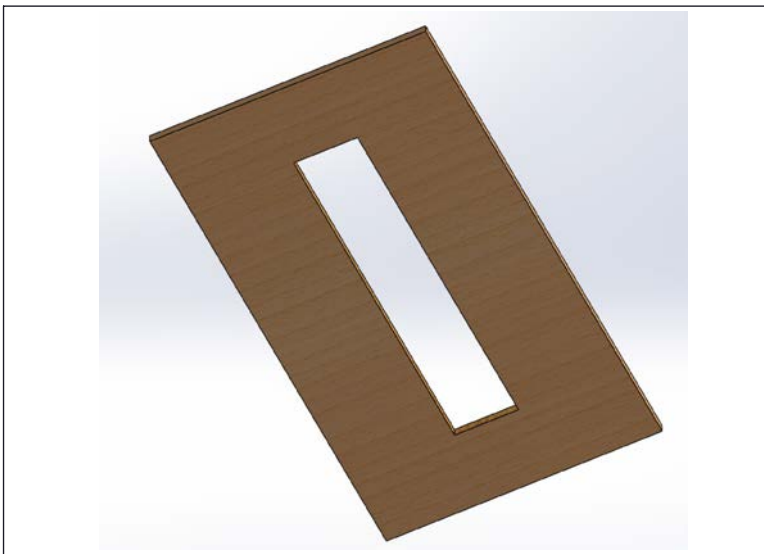


Figure 1

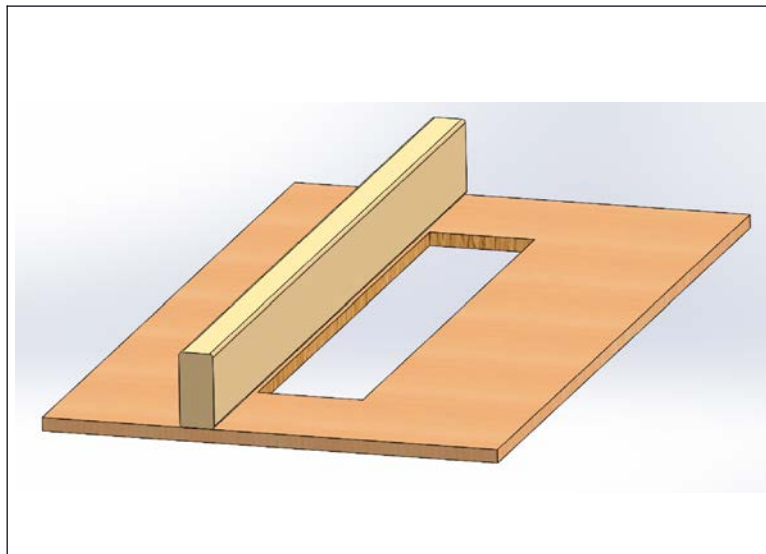


Figure 2

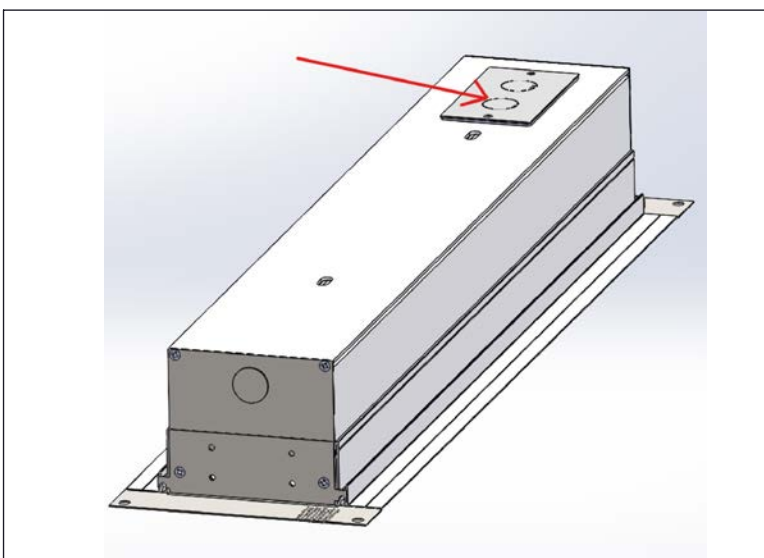


Figure 3

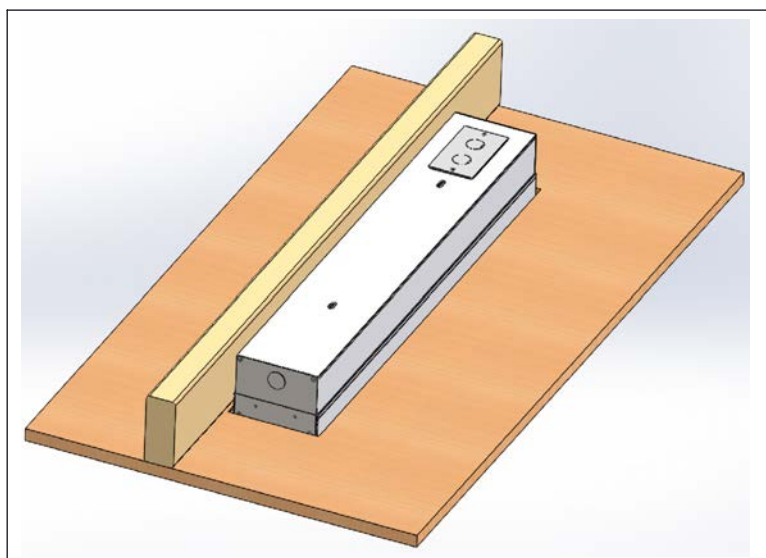


Figure 4

INSTALLATION STEPS

1. Make the cutout in ceiling according to the hole width for the specific mounting shown on Page 1, and the fixture length.
2. The ceiling opening should have a stud or structure spanning one side of the opening.
3. Make the electrical connection from the ceiling to the fixture access plate.
4. Push the fixture into the ceiling opening.

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure, or process. Specifications and dimensions are subject to change.

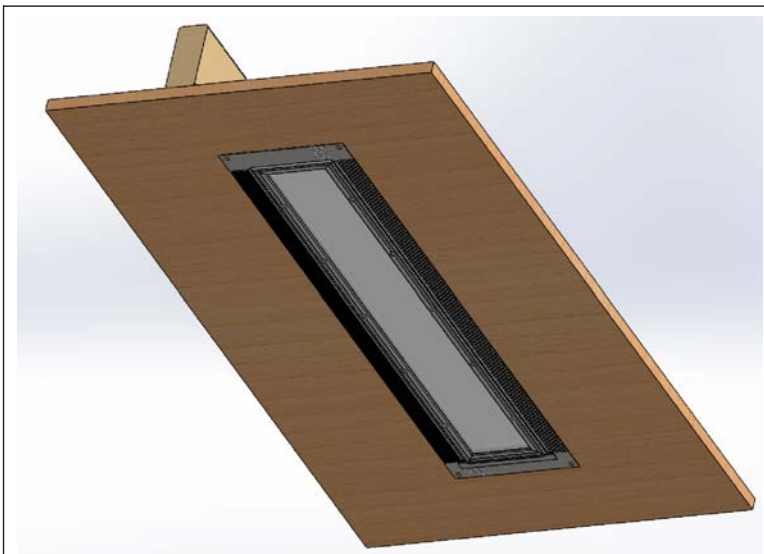


Figure 5

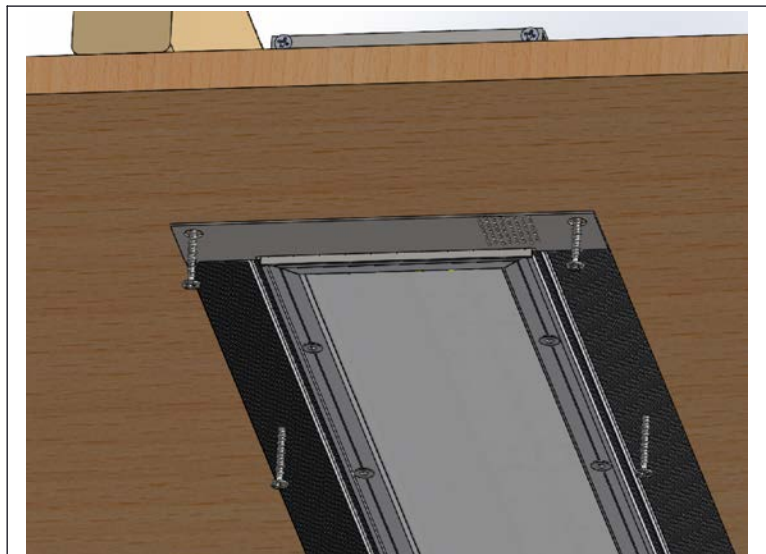


Figure 6

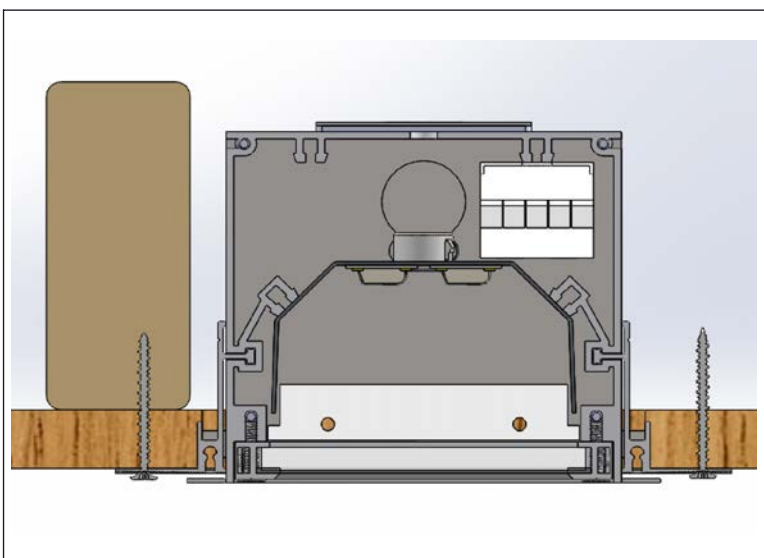


Figure 7

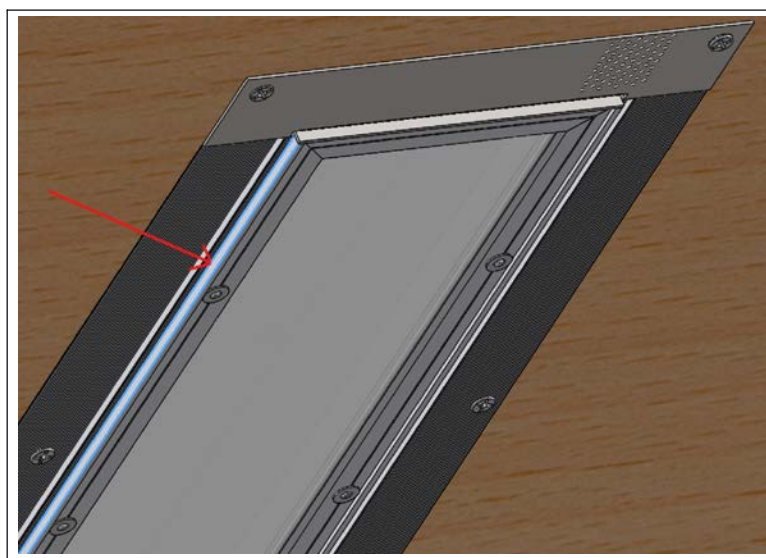


Figure 8

INSTALLATION STEPS

5. Fixture as seen from below.
6. Install drywall screws in the flange to mount the fixture to the ceiling. Use drywall anchors where not securing to a stud/structure.
7. Mounting screws installed.
8. When finishing the ceiling with plaster, don't go past the vertical face of the housing. Plastering past the housing may impact the removal of the fixture doorframe for servicing.

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure, or process. Specifications and dimensions are subject to change.

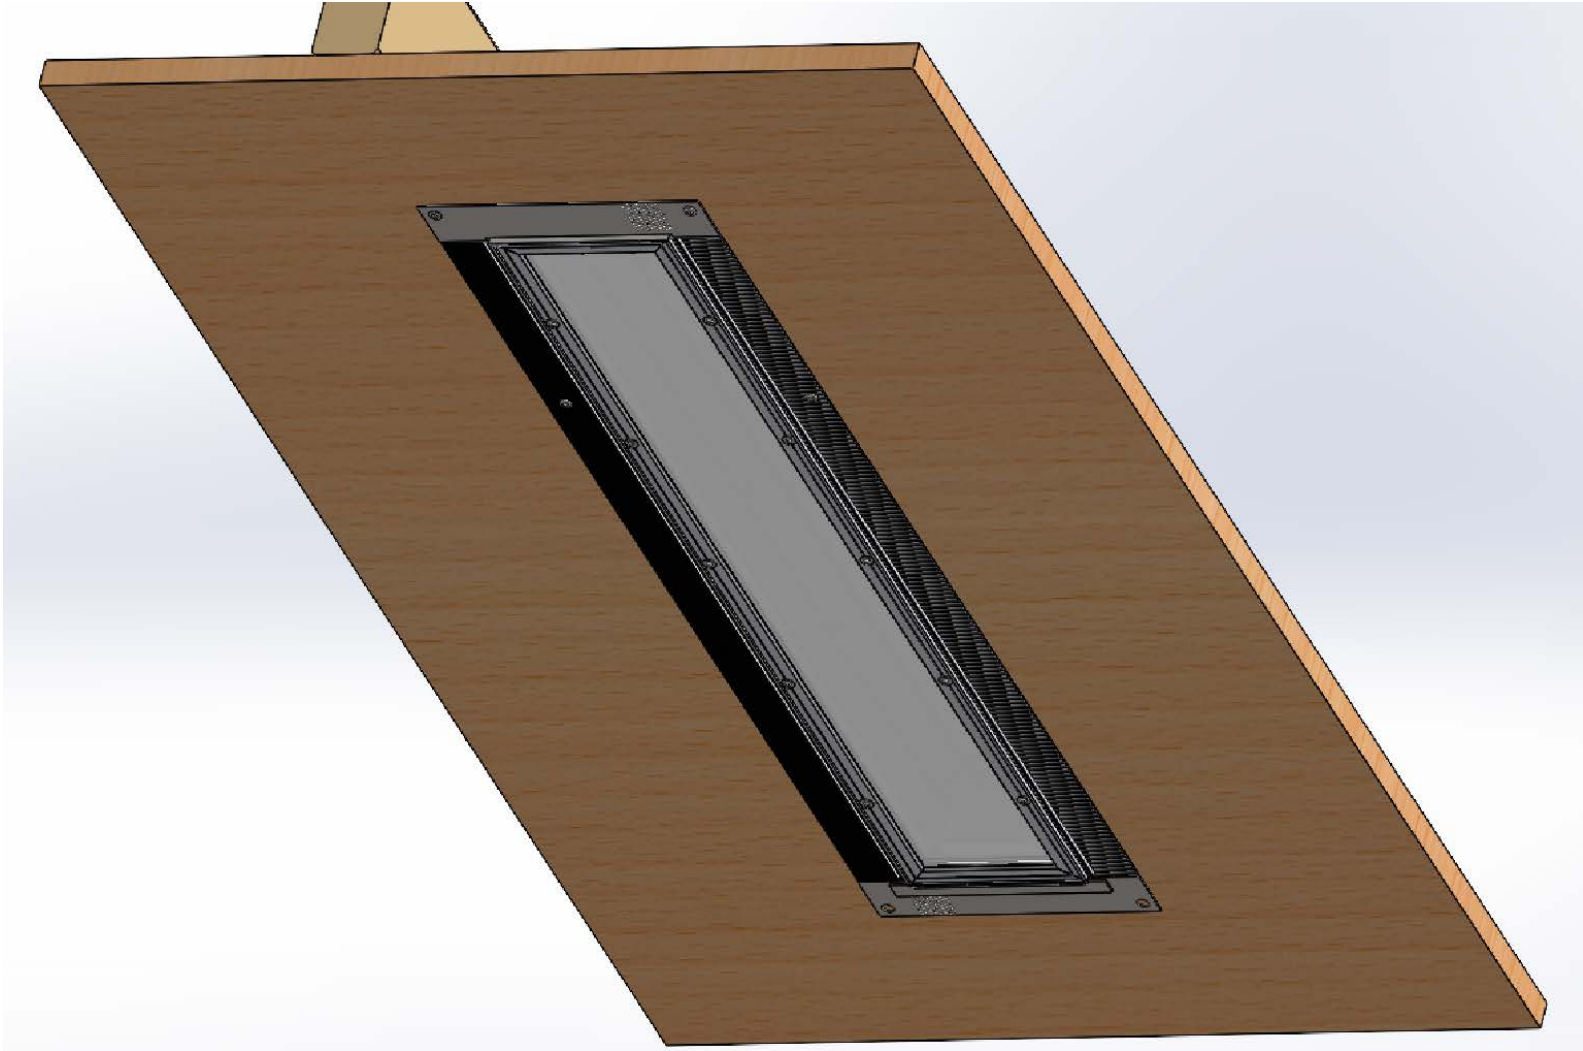


Figure 9

INSTALLATION STEPS

9. Finish the ceiling as necessary.