
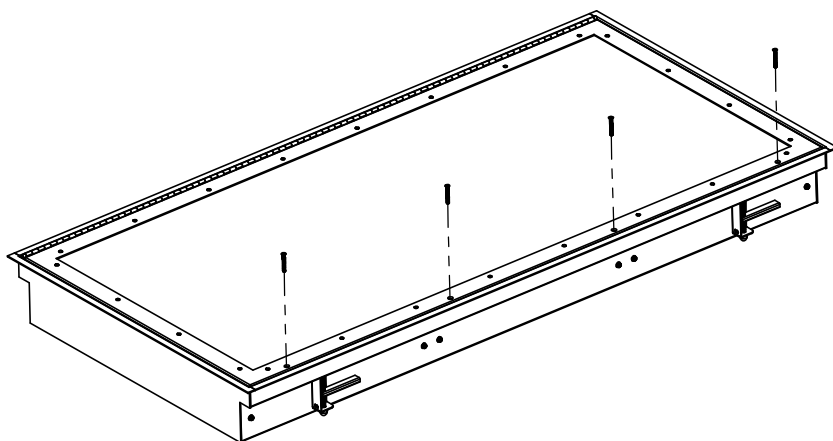


IMPORTANT SAFE GUARDS:

- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- DISCONNECT POWER BEFORE BEGINNING INSTALLATION.
- FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH THE NATIONAL ELECTRIC CODE AND ANY LOCAL CODES.
- TO BE INSTALLED ONLY BY A QUALIFIED ELECTRICIAN.
- PROPER GROUNDING IS REQUIRED TO INSURE PERSONAL SAFETY.
- READ ALL FIXTURE MARKINGS AND LABELS TO ENSURE CORRECT INSTALLATION OF FIXTURE.
- RISK OF FIRE, USE A MINIMUM OF 90C SUPPLY CONNECTORS.



INSTALLATION INSTRUCTIONS:


1. Remove frame fasteners to unsecure frame.

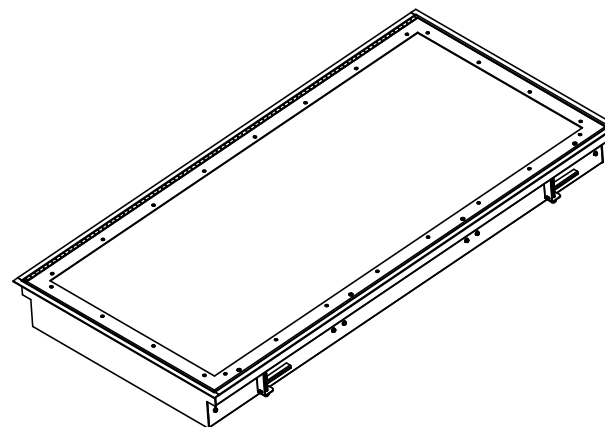


GRID COMPATIBILITY:

Spaced at 1x2 - 12" x 24" Center to Center
 Spaced at 1x4 - 12" x 48" Center to Center
 Spaced at 2x2 - 24" x 24" Center to Center
 Spaced at 2x4 - 24" x 48" Center to Center

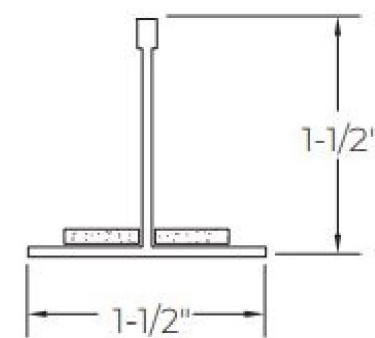

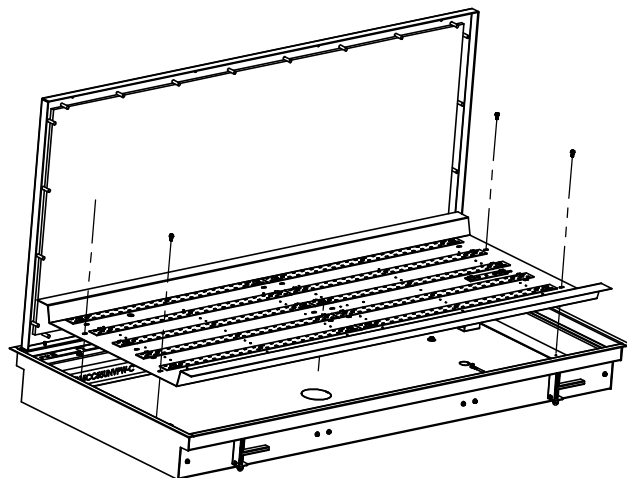


2. Open frame and remove (4) fasteners to unsecure and remove LED tray from housing.

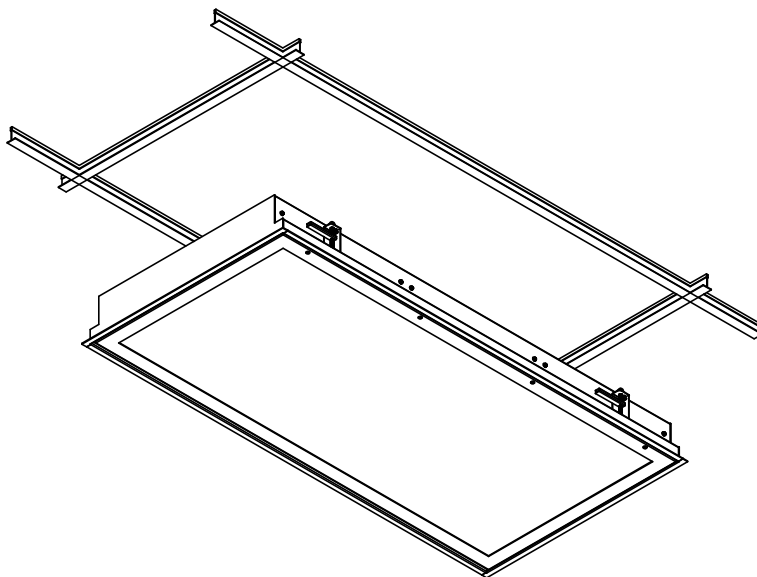


3. Raise fixture into grid ceiling and adjust to center of opening.

4. Remove desired K.O.(s) for wiring access and make necessary electrical connections.

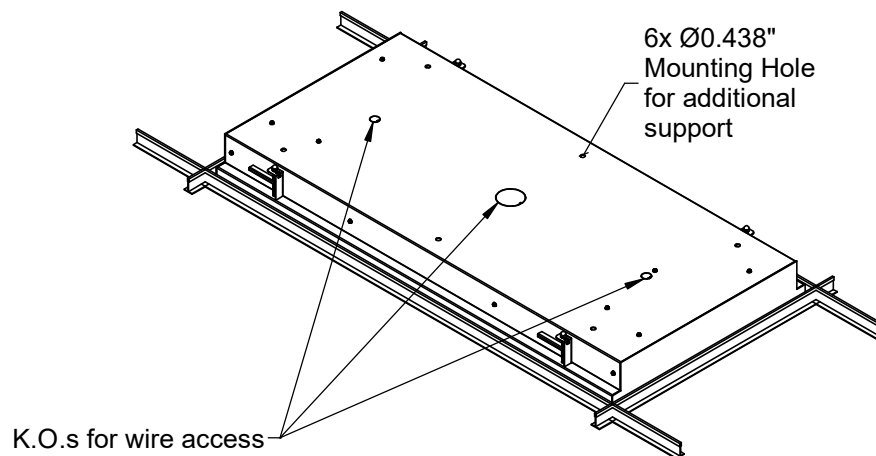

5. Re-install LED tray and secure with (4) fasteners.

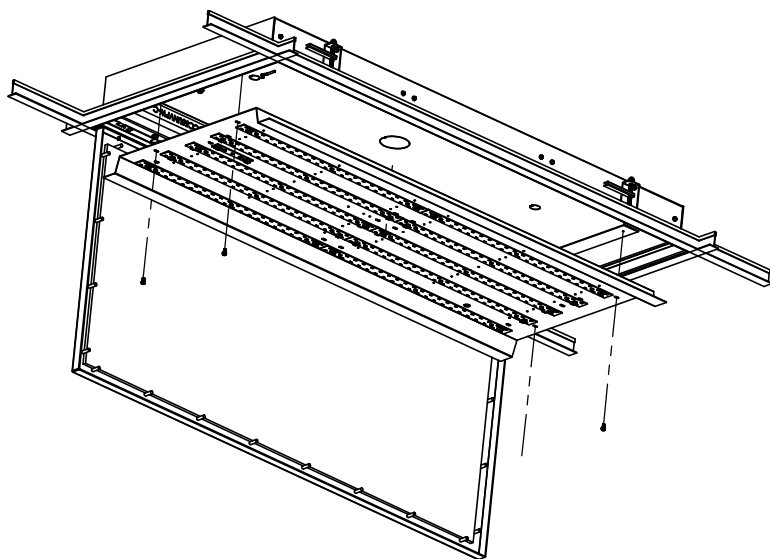

6. Close and secure frame with (4) fasteners to complete install.

