


INSTALLATION INSTRUCTIONS

Fixture Family: SPD


Description: Multi-Function Fixture

IMPORTANT SAFETY INSTRUCTIONS


- This product must be installed in accordance with all applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.
- Disconnect power before beginning installation.
- Fixture must be installed in compliance with the National Electric Code and any local codes.
- To be installed only by a qualified electrician.
- Proper grounding is required to ensure personal safety.
- Read all fixture markings and labels to ensure correct installation of fixture.
- Risk of fire, use minimum of 90C supply connectors.
- These instructions may not cover all details or variations. If additional information is needed, please contact New Star Lighting.




**2x4 CEILING
CUT OUT**




**2x2 CEILING
CUT OUT**



**1x4 CEILING
CUT OUT**



**1x2 CEILING
CUT OUT**

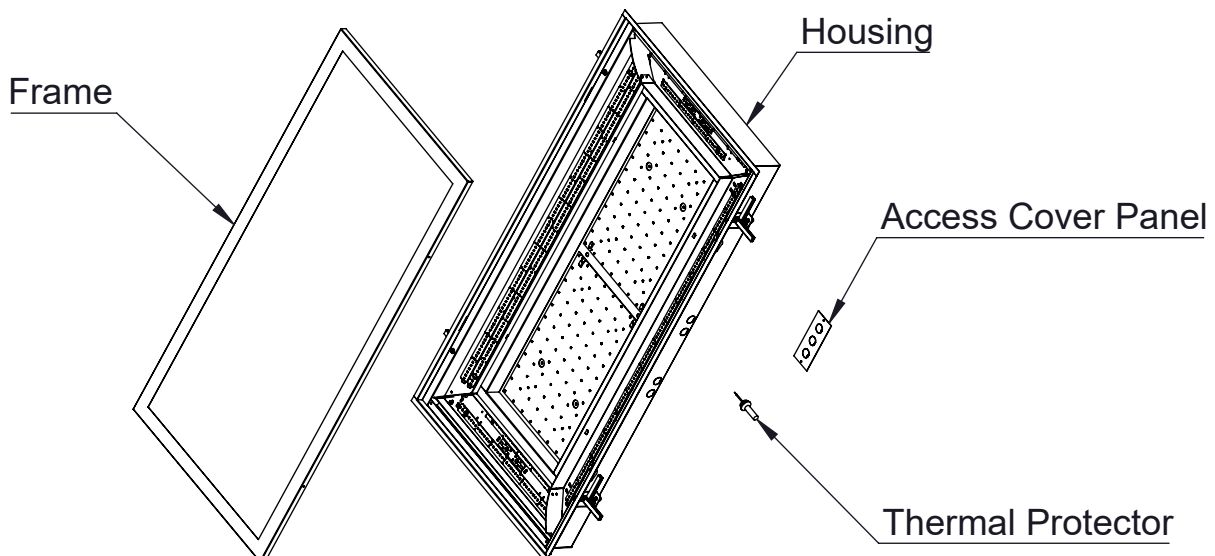

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure, or process. Specifications and dimensions are subject to change.

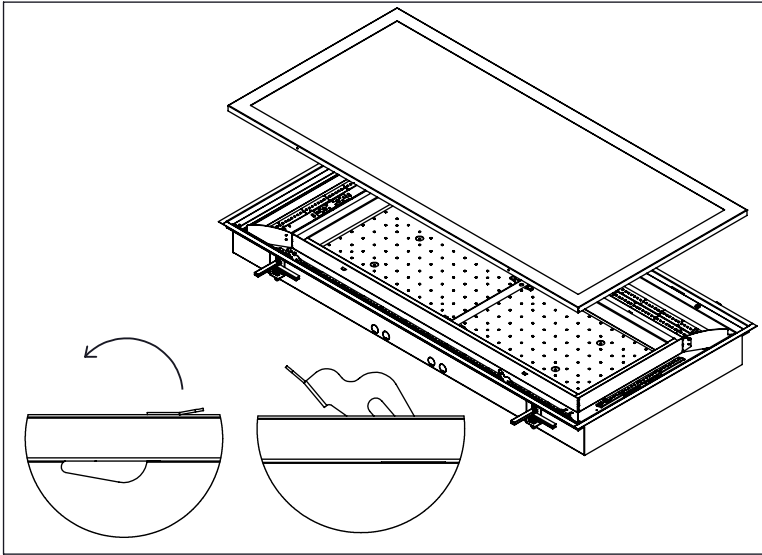


Figure 1

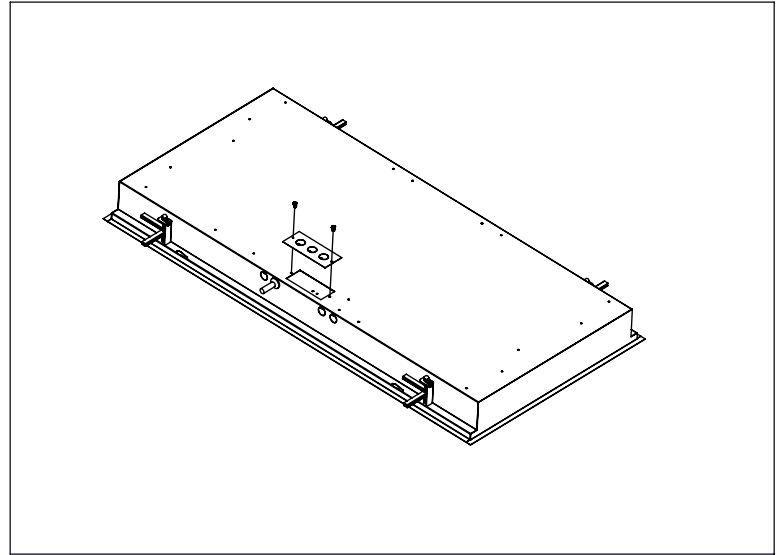


Figure 2

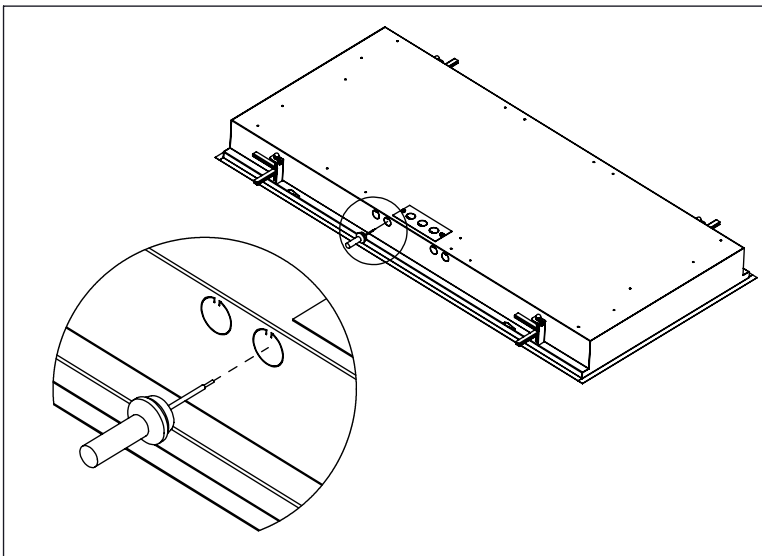


Figure 3

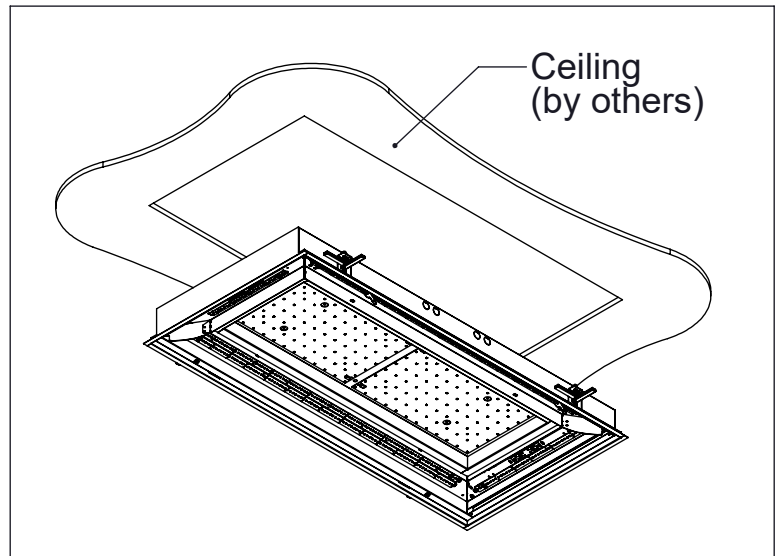


Figure 4

INSTALLATION STEPS

1. Rotate latch to unfasten Frame. Remove Frame (Fig. 1)
2. Remove Access Cover Panel, make all necessary electrical connections and re-attach Access Cover Panel (Fig. 2).
3. If applicable, snap Thermal Protector into place by pushing it into the open K.O. (Fig. 3).
4. Raise fixture into Ceiling (Fig. 4).

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure, or process. Specifications and dimensions are subject to change.

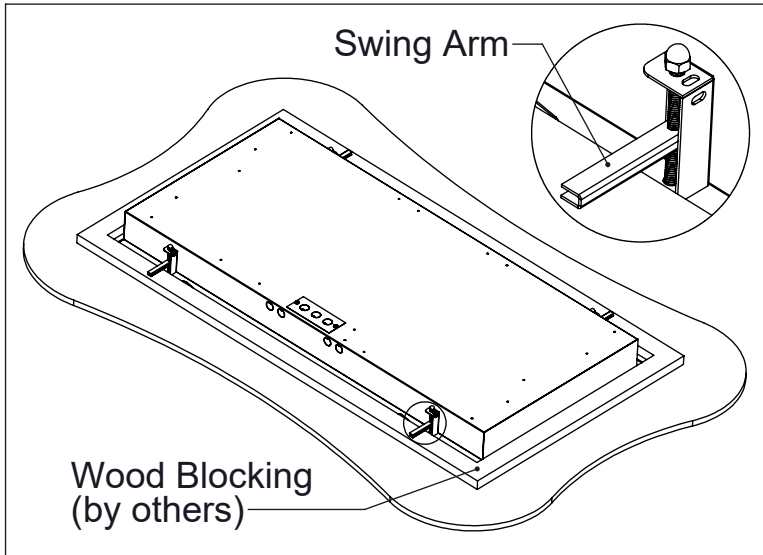


Figure 5

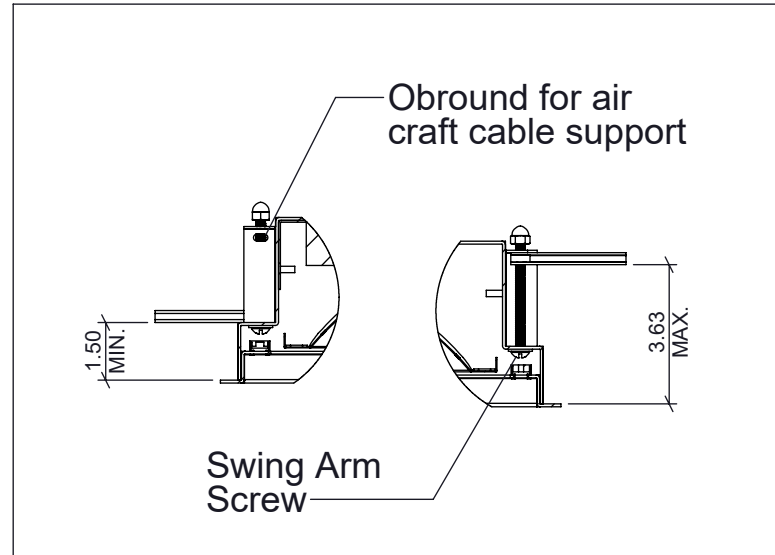


Figure 6

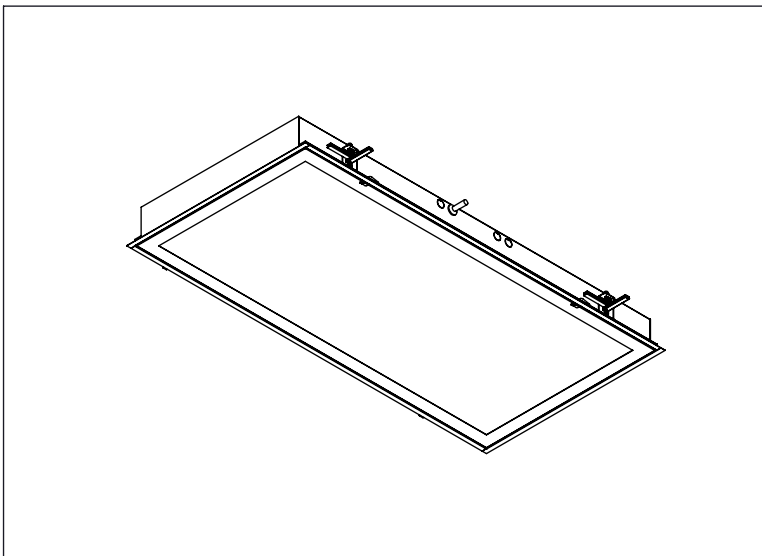


Figure 7

INSTALLATION STEPS

5. Rotate Swing Arms over Wood Blocking (Fig. 5).
6. Rotate Swing Arm Screws to adjust the height of the Swing Arms as needed (Fig. 6).
7. Re-attach Frame (Fig. 7).

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure, or process. Specifications and dimensions are subject to change.