


# ROW MOUNT INSTALLATION INSTRUCTIONS

**Fixture Family:** AFO

**Description:** Teardrop fixture

**THIS DOCUMENT CONTAINS SUPPLEMENTAL INFORMATION EXCLUSIVELY PERTAINING TO ROW MOUNTING. PLEASE HEED ALL SAFETY GUIDELINES AND PROVISIONS OUTLINED IN THE GENERAL AFO INSTALLATION INSTRUCTIONS.**

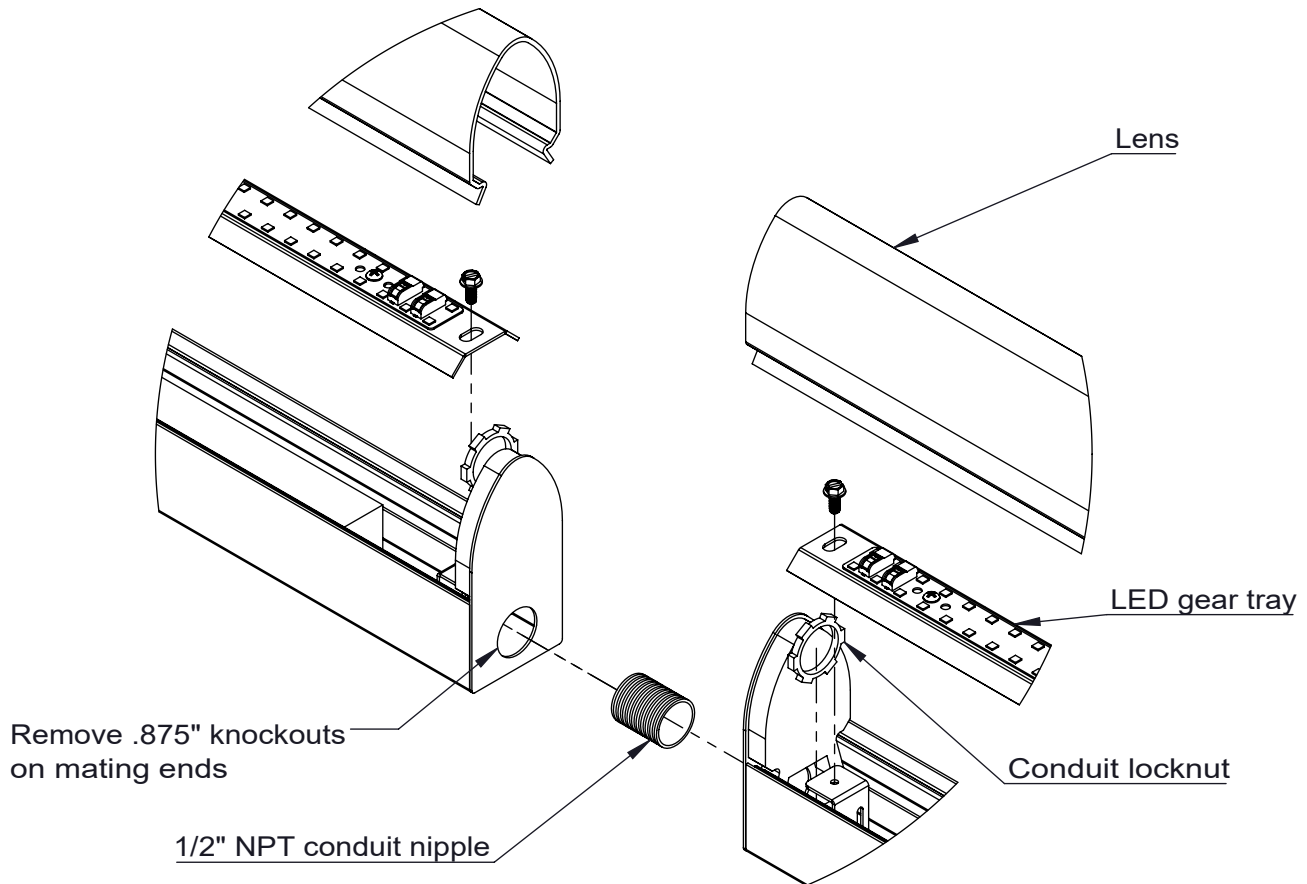

1. Mount first fixture to ceiling per general AFO installation instructions. Remove gear trays and lenses from both fixtures and remove .875" knockouts from the mating ends.
2. Insert the supplied conduit nipple into the mounted fixture from the outside, then secure from the inside using the supplied locknut.
3. Mount second fixture up to the end of the first, passing the conduit nipple through the endcap. For best fit between the two endcaps, tighten the second locknut before securing the second fixture to the ceiling. You may need two pairs of hands.
4. For longer runs, repeat the above steps between second and third fixtures, then between third and fourth, etc.
5. Finish installation as described in the general AFO installation instructions. Use the conduit nipples to ensure ground continuity between each fixture's ground wire and the next.

Installer is responsible for adequately reinforcing walls and/or ceiling to support luminaire weight. These instructions do not claim to cover all details or variations in the equipment, procedure, or process. Specifications and dimensions are subject to change.